

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 944 269 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**13.11.2002 Bulletin 2002/46**

(51) Int Cl.7: **H04N 13/00**, H04N 5/92,  
G11B 20/10, H04N 9/804

(21) Application number: **97946090.4**

(86) International application number:  
**PCT/JP97/04429**

(22) Date of filing: **03.12.1997**

(87) International publication number:  
**WO 98/025413 (11.06.1998 Gazette 1998/23)**

(54) **OPTICAL DISC FOR HIGH RESOLUTION AND THREE-DIMENSIONAL IMAGE RECORDING,  
OPTICAL DISC REPRODUCING DEVICE, AND OPTICAL DISC RECORDING DEVICE**

VORRICHTUNG ZUR AUFNAHME UND WIEDERGABE VON HOCHAUFLÖSENDEN UND  
DREIDIMENSIONALEN BILDERN MIT OPTISCHER SPEICHERPLATTE

DISQUE OPTIQUE POUR ENREGISTREMENT OPTIQUE D'IMAGES TRIDIMENSIONNELLES ET  
DE HAUTE RESOLUTION, DISPOSITIF DE REPRODUCTION A DISQUE OPTIQUE, ET  
DISPOSITIF D'ENREGISTREMENT A DISQUE OPTIQUE

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **04.12.1996 JP 32377096**  
**26.12.1996 JP 34728496**  
**28.02.1997 WOPCT/JP97/00615**  
**29.08.1997 JP 23432097**  
**21.10.1997 JP 28809997**

(43) Date of publication of application:  
**22.09.1999 Bulletin 1999/38**

(60) Divisional application:  
**01101177.2 / 1 094 674**

(73) Proprietor: **MATSUSHITA ELECTRIC INDUSTRIAL  
CO., LTD.**  
**Kadoma-shi, Osaka 571-8501 (JP)**

(72) Inventors:  
• **OSHIMA, Mitsuaki**  
**Kyoto-shi, Kyoto 615 (JP)**

• **KITAURA, Hiromu**  
**Osaka 589 (JP)**  
• **FUKUDA, Hideki**  
**Osaka 576 (JP)**  
• **ISHIHARA, Hideshi**  
**Osaka 576 (JP)**  
• **KAWARA, Toshiyuki**  
**Osaka 573-01 (JP)**

(74) Representative: **Kügele, Bernhard et al**  
**Novagraaf SA**  
**25, Avenue du Pailly**  
**1220 Les Avanchets - Geneva (CH)**

(56) References cited:  
**JP-A- 1 109 990** **JP-A- 6 038 244**  
**JP-A- 6 350 968** **JP-A- 7 030 925**  
**JP-A- 7 143 443**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 944 269 B1**

## Description

### TECHNICAL FIELD

**[0001]** The present invention relates to an optical disk having a three-dimensional (3D) picture and a high definition picture stored thereon, and an apparatus for recording data to or reproducing data from the optical disk.

### BACKGROUND ART

**[0002]** A conventionally known optical disk having a 3D moving picture stored thereon is as shown in Figure 10. An optical disk **201** has a picture for the right eye (right-eye picture) stored in even fields **204**, **204a** and **204b** and a picture for the left eye (left-eye picture) stored in odd fields **203**, **203a** and **203b**. The right-eye picture and the left-eye picture are recorded alternately. When the data stored on the optical disk **201** is reproduced by an existing optical disk reproduction apparatus **205** shown in Figure 11, a right-eye picture and a left-eye picture appear on a TV screen **206** alternately every 1/60 second. The naked eye recognizes only a picture in which the right-eye picture and the left-eye picture are overlapped. With 3D spectacles **207**, in which a shutter for the right-eye picture and a shutter for the left-eye picture are switched over every 1/60 second, a 3D picture is recognized. As shown in Figure 12, a right-eye picture and a left-eye picture are each encoded alternately in every other field as an interlace signal in 1 GOP of an MPEG signal.

**[0003]** For high definition pictures, progressive systems referred to as 525P and 720P have been studied.

**[0004]** A first problem of the conventional art will be described. When data in a conventional 3D optical disk is reproduced by an ordinary, conventional 2D reproduction apparatus, even a non-3D picture, i.e., even a 2D picture is not output. Data in the 3D optical disk is only reproduced by a reproduction apparatus connected to a 3D display. Accordingly, it is required to create two types of optical disks, i.e., a 3D optical disk and a 2D optical disk for the same contents. The same is true with the high definition picture. In other words, the conventional 3D and high definition optical disks are not compatible with ordinary optical disks. A first objective of the present invention is to provide a 3D or high definition optical disk which is compatible with ordinary optical disks, and a reproduction system for the 3D or high definition optical disk.

**[0005]** The term "compatibility" is clearly defined as similar to the compatibility between monaural records and stereo records discussed in the past. In other words, data in a novel 3D or high resolution disk according to the present invention is output as a "monaural" vision, i.e., as a 2D picture or an ordinary resolution picture by an existing reproduction apparatus developed for DVDs or the like, and is reproduced as a "stereo" vision, i.e., a 3D picture or a high resolution picture by the novel

reproduction apparatus according to the present invention.

**[0006]** A second problem of the conventional art concerns a synchronization system. According to a conventional synchronization system, decoding starts when decoding conditions for each compressed video signal are provided. The conventional synchronization system has problems in that, for example, when the data becomes out of synchronization for some reason during reproduction, compensation is not performed; and that audio data is not synchronized.

**[0007]** A second objective of the present invention is to provide a reproduction apparatus for reproducing a plurality of compressed video signals or a plurality of compressed audio signals in synchronization with one another and performing compensation when the data becomes out of synchronization during reproduction.

**[0008]** Reference is made to JP-A-07143443 which describes a system designed to easily reproduce only preferential information from consecutive information by selecting the kind of information matching a code quantity of a disk, multiplexing the information and coding the information so as to switch the kind of information at a rotational angle of the disk. A changeover switch selects a picture code of a buffer and the selected code is outputted from a terminal and given to a counter. The counter counts a code quantity and a timing signal is given to a changeover controller for each prescribed code quantity. The controller controls a changeover switch in response to a ratio of a predetermined code transfer rate of a timing signal from the counter, for TV information and HDTV difference information. The changeover switch selects the appropriate buffer under the control of the changeover controller. The changeover is implemented in each timing when a virtual track takes a predetermined angle.

**[0009]** Reference is also made to JP-A-06350 968 which describes a system designed to obtain not only a decoded high definition television signal but also a standard television signal even on the reproduction side when the high definition television signal is subject to high efficiency coding and the result is recorded on an optical disk. Picture data in one frame period of a high definition television signal are divided into two by a field division circuit and picture data at every unit of division are subject to high efficiency coding by coders as picture data equivalent to one frame of a standard television signal and the result is recorded on an optical disk by a 2-channel recording device. Then coded data by one channel are decoded by a decoder at the time of reproduction to decode the standard television signal with the coded data for 2 channels decoded by the decoders thereby reproducing the high definition television signal. The 2-channel signals are recorded on/reproduced from opposite faces of the optical disk, or at diametrically opposite positions on the same face on the optical disk.

## DISCLOSURE OF THE INVENTION

**[0010]** Aspects of the invention are defined in the claims.

**[0011]** A preferred embodiment of the present invention includes the following means to achieve the above-described objectives.

**[0012]** An optical disk according to the preferred embodiment is obtained in the following manner. Two moving pictures each having a frame rate of 30 frames/sec. are input. A plurality of frames of each picture, which correspond to 1 GOP or more of the disk, are set as a picture unit. These picture units of the two pictures are arranged on the optical disk alternately as interleave blocks. Each interleave block corresponds to one rotation or more. The two moving pictures can be, for example, a picture for the right eye and a picture for the left eye; or includes field components of a progressive picture.

**[0013]** When such an optical disk is reproduced by an ordinary reproduction apparatus for two-dimensional (2D) display, an ordinary two-dimensional is reproduced.

**[0014]** A reproduction apparatus for 3D and high definition pictures according to the preferred embodiment includes means for reproducing picture identification information from an optical disk, means for reproducing a two-dimensional picture in a conventional process, means for reproducing a 3D or high definition picture, and means for outputting the 3D or high definition picture.

**[0015]** Additionally, a preferred embodiment includes the following means to achieve the second objective.

**[0016]** A reproduction apparatus according to a preferred embodiment includes reference time signal generation means for generating a reference time signal; and a plurality of picture extension/reproduction means having a function of extending a compression video stream and controlling reproduction time of the extended video signal in accordance with the difference between the reference time signal and the picture reproduction time information.

**[0017]** Another reproduction apparatus according to another preferred embodiment preferably includes a plurality of picture extension/reproduction means having a function of generating a reference time signal, extending a compression video stream and controlling reproduction time of the extended video signal in accordance with the difference between the reference time signal and the picture reproduction time information. The reference time signals in the plurality of picture extension/reproduction means are corrected using identical information at substantially the same time.

**[0018]** Still another reproduction apparatus according to another preferred embodiment preferably includes reference time signal generation means for generating a reference time signal; and a plurality of audio extension/reproduction means having a function of extending

a compression audio stream and controlling reproduction time of the extended audio signal in accordance with the difference between the reference time signal and the audio reproduction time information.

**[0019]** Yet another reproduction apparatus according to another preferred embodiment controls reproduction time by changing the frequency of the clock by which the audio extension/reproduction means performs extension and reproduction.

## BRIEF DESCRIPTION OF DRAWINGS

**[0020]** Figure 1 is a block diagram showing a recording apparatus in one example according to the present invention.

**[0021]** Figure 2 is a timing diagram showing the relationship between an input signal and a recording signal in one example according to the present invention.

**[0022]** Figure 3 is a top view of an optical disk showing the interleave block arrangement in one example according to the present invention.

**[0023]** Figure 4 is a view illustrating 3D picture arrangement information one example according to the present invention.

**[0024]** Figure 5 is a view showing a reproduction apparatus in one example according to the present invention.

**[0025]** Figure 6 is a timing diagram illustrating the relationship between a recorded signal and a picture output signal in a reproduction apparatus in one example according to the present invention.

**[0026]** Figure 7 is a block diagram showing an MPEG decoder of a different system of a reproduction apparatus in one example according to the present invention.

**[0027]** Figure 8 is a timing diagram showing the relationship between a recording signal and an output signal when 2D reproduction is performed with a reproduction apparatus in one example according to the present invention.

**[0028]** Figure 9 is a block diagram showing a 2D reproduction apparatus in one example according to the present invention.

**[0029]** Figure 10 is a top view showing data arrangement of a conventional optical disk having a 3D picture.

**[0030]** Figure 11 is a block diagram showing a reproduction apparatus for reproducing a conventional optical disk having a 3D picture.

**[0031]** Figure 12 is a timing diagram showing the relationship between a recording signal obtained by reproducing a conventional optical disk having a 3D picture and a picture output signal.

**[0032]** Figure 13 is a timing diagram showing the relationship among a virtual 3D identifier, an R output and an L output in one example according to the present invention.

**[0033]** Figure 14 is a reproduction sequence view showing the difference of f pointer accessing in an ordinary picture reproduction mode and a 3D reproduction

mode in one example according to the present invention.

[0034] Figure 15 is a flowchart (I) illustrating how a process of accessing a pointer is changed in accordance with whether a 3D video signal is reproduced or not in one example according to the present invention.

[0035] Figure 16 is a flowchart (II) illustrating how a process of accessing a pointer is changed in accordance with whether a 3D video signal is reproduced or not in one example according to the present invention.

[0036] Figure 17 is a flowchart showing how the manner of output is changed in accordance with whether the signal to be reproduced is a 3D video signal or not by a 3D reproduction apparatus in one example according to the present invention.

[0037] Figure 18 is a view showing a 3D picture identifier in a 3D picture logical arrangement table in one example according to the present invention.

[0038] Figure 19 is a flowchart showing a method for specifying the attribute of each chapter, cell and interleave block of a 3D picture based on a 3D picture identifier in the 3D picture logical arrangement table in one example according to the present invention.

[0039] Figure 20 is a block diagram of a reproduction apparatus in an interlace picture signal output mode in one example according to the present invention.

[0040] Figure 21 is a block diagram of a reproduction apparatus in a progressive picture signal output mode in one example according to the present invention.

[0041] Figure 22 is a block diagram of a recording apparatus in a progressive picture signal input mode in one example according to the present invention.

[0042] Figure 23 is a view illustrating the principle of multiple angle video data division multiplex system in one example according to the present invention.

[0043] Figure 24 is a block diagram of a reproduction apparatus in a 3D picture signal reproduction mode in one example according to the present invention.

[0044] Figure 25 is a block diagram of a 4X reproduction apparatus in a 3D progressive picture signal reproduction mode in one example according to the present invention.

[0045] Figure 26 is a block diagram of a reproduction apparatus in a multi-stream progressive picture signal reproduction mode in one example according to the present invention.

[0046] Figure 27 is a view illustrating a data structure of the entire optical disk in one example according to the present invention.

[0047] Figure 28 is a view illustrating an inner structure of a volume information file in Figure 27 in one example according to the present invention.

[0048] Figure 29 is a flowchart showing a detailed process for reproducing a program chain group by a system control section M1-9 in one example according to the present invention.

[0049] Figure 30 is a block diagram showing a structure of a part of an AV synchronization control 12-10,

the part performing AV synchronization, in one example according to the present invention.

[0050] Figure 31 is a timing diagram showing a data stream which is reproduced and output through a buffer of the decoder in one example according to the present invention.

[0051] Figure 32 is a view illustrating a method for reducing interlace interference by turning on or off a filter in one example according to the present invention.

[0052] Figure 33 is a view illustrating the principle of an encoding system using a common motion detecting vector in one example according to the present invention.

[0053] Figure 34 is a view illustrating a method for adjusting the timing for reproducing data from a DVD disk in one example according to the present invention.

[0054] Figure 35 is a timing diagram showing reproduction of an interleave block when one video stream is switched to another in one example according to the present invention.

[0055] Figure 36 is a view illustrating the principle of recording two progressive video signals after dividing them into interleave blocks in one example according to the present invention.

[0056] Figure 37 is a flowchart showing a method for skipping a first dummy field of a VOB in one example according to the present invention.

[0057] Figure 38 is a flowchart illustrating a process of STC switching for seamless connection in one example according to the present invention.

[0058] Figure 39 is a block diagram of data decoding in one example according to the present invention.

[0059] Figure 40 is a view illustrating the principle of dividing a scope (wide) picture in a horizontal direction and recording the resultant signals as interleave blocks in one example according to the present invention.

[0060] Figure 41 is a view illustrating the principle of synthesizing a scope (wide) picture from an optical disk having the scope picture in a divided state and processing the synthesized picture with 3-2 transform in one example according to the present invention.

[0061] Figure 42 is a structural view of a system stream and video data on an optical disk in one example according to the present invention.

[0062] Figure 43 is a flowchart for seamless connection in one example according to the present invention.

[0063] Figure 44 is a view illustrating a method for dividing interpolation information in horizontal and vertical directions and recording the resultant signals in interleave blocks in one example according to the present invention.

[0064] Figure 45 is a timing diagram of reproduction of progressive, 3D and wide signals with respect to the data amount in buffer in one example according to the present invention.

[0065] Figure 46 is a structural view of a horizontal filter and a vertical filter in one example according to the present invention.



**[0066]** Figure 47 is a block diagram of a reproduction apparatus which shares a common motion vector signal and color information in one example according to the present invention.

**[0067]** Figure 48 is a view illustrating the principle of motion detection of a progressive picture using a motion detection vector in one example according to the present invention.

**[0068]** Figure 49 shows a signal format of a picture identifier in one example according to the present invention.

**[0069]** Figure 50 shows contents of a vertical filter and a horizontal filter in one example according to the present invention.

**[0070]** Figure 51 is a view illustrating the principle of dividing and recording a 1050 interlace signal in one example according to the present invention.

**[0071]** Figure 52 is an arrangement view for outputting a progressive signal, an NTSC signal and a HDTV signal in one example according to the present invention.

**[0072]** Figure 53 is a view showing a progressive reproduction method for reproducing an interleave block while referring to a video presentation time stamp in one example according to the present invention.

**[0073]** Figure 54 is an arrangement view of an HDTV sub signal and an NTSC signal by simultaneous casting in one example according to the present invention.

**[0074]** Figure 55 is a block diagram of a reproduction apparatus for an HDTV/NTSC disk by simultaneous casting in one example according to the present invention.

**[0075]** Figure 56 is a flowchart illustrating a method for controlling two buffers in one example according to the present invention.

**[0076]** Figure 57 is a flowchart illustrating a method for performing AV synchronization of a first decoder and a second decoder in one example according to the present invention.

**[0077]** Figure 58 is a view illustrating the principle of an MADM system for dividing a signal into two in a horizontal direction in one example according to the present invention.

**[0078]** In Figure 59, (a) is a view illustrating processing of an entirety of a horizontal filter circuit in one example according to the present invention, and (b) is a view illustrating processing of each line of the horizontal filter circuit in one example according to the present invention.

**[0079]** Figure 60 is a block diagram of a system for dividing a scope-size picture into two in a horizontal direction and recording in the MADM system in one example according to the present invention.

**[0080]** Figure 61 is a view illustrating the principle of a provider defined stream multiplex system (vertical division) in one example according to the present invention.

**[0081]** Figure 62 is a view illustrating the principle of

a provider defined stream multiplex system (horizontal division) in one example according to the present invention.

**[0082]** Figure 63 shows a signal format of provider defined stream multiplex system in one example according to the present invention.

**[0083]** Figure 64 is a block structural view of an optical disk reproduction apparatus in one example according to the present invention.

**[0084]** Figure 65 is a structural view of a video decoder in one example according to the present invention.

**[0085]** Figure 66 shows a data structure of an optical disk in one example according to the present invention.

**[0086]** Figure 67 is a timing diagram of video reproduction in one example according to the present invention.

**[0087]** Figure 68 is a block structural view of an optical disk reproduction apparatus in one example according to the present invention.

**[0088]** Figure 69 is a structural view of an audio decoder in one example according to the present invention.

**[0089]** Figure 70 shows a data structure of an optical disk in one example according to the present invention.

**[0090]** Figure 71 is a timing diagram of audio and video reproduction in one example according to the present invention.

**[0091]** Figure 72 shows an optical disk reproduction apparatus in one example according to the present invention.

**[0092]** Figure 73 is a structural view of a video decoder in one example according to the present invention.

**[0093]** Figure 74 is a timing diagram of video reproduction in one example according to the present invention.

**[0094]** Figure 75 is a block structural view of an optical disk reproduction apparatus in one example according to the present invention.

**[0095]** Figure 76 is a structural view of a video decoder in one example according to the present invention.

**[0096]** Figure 77 is a structural view of a video decoder in one example according to the present invention.

**[0097]** Figure 78 is a structural view of a video decoder in one example according to the present invention.

**[0098]** Figure 79 is a block structural view of an optical disk reproduction apparatus in one example according to the present invention.

**[0099]** Figure 80 is a structural view of an audio decoder in one example according to the present invention.

**[0100]** Figure 81 shows a data structure of an optical disk in one example according to the present invention.

**[0101]** Figure 82 is a timing diagram of audio and video reproduction in one example according to the present invention.

**[0102]** Figure 83 is a timing diagram of operation frequencies of audio and video reproduction in one example according to the present invention.

**[0103]** Figure 84 is a timing diagram of operation frequencies of audio and video reproduction in one example according to the present invention.

**[0104]** Figure 85 is an IP structural view of an MADM stream in one example according to the present invention.

**[0105]** Figure 86 shows a method for preventing a conventional reproduction apparatus from outputting a sub picture signal in one example according to the present invention.

**[0106]** Figure 87 shows simulation calculation results showing a buffer amount required for simultaneous reproduction in one example according to the present invention.

**[0107]** Figure 88 is an arrangement view of continuous blocks and interleave blocks in one example according to the present invention.

**[0108]** Figure 89 is an arrangement view of interleave blocks in one example according to the present invention.

**[0109]** Figure 90 is a block diagram of multiple (2) screen in one example according to the present invention.

**[0110]** Figure 91 is a view illustrating the principle of dividing a high resolution video signal in a horizontal direction to obtain two streams, recording the streams, synthesizing the two streams to reproduce the high resolution video signal (luminance signal) in the first example according to the present invention.

**[0111]** Figure 92 is a view illustrating the principle of dividing a high resolution video signal in a horizontal direction to obtain two streams, recording the streams, synthesizing the two streams to reproduce the high resolution video signal (color signal) in the first example according to the present invention.

**[0112]** Figure 93 is a flowchart illustrating the compatibility when an MADM disk in the first example according to the present invention is reproduced by a conventional reproduction apparatus.

**[0113]** Figure 94 is a flowchart illustrating an operation of reproducing an MADM disk in the first example according to the present invention by an MADM reproduction apparatus.

**[0114]** In Figure 95, (a) is a view illustrating an accessing process using a pointer of first reproduction information when an MADM disk in the first example according to the present invention is reproduced by a conventional reproduction apparatus, and (b) is a view illustrating an accessing process using second reproduction information when an MADM disk in the first example according to the present invention is reproduced by an MADM reproduction apparatus.

**[0115]** Figure 96 is a block diagram of a reproduction apparatus for synthesizing two streams in the first example according to the present invention.

**[0116]** Figure 97 is a block diagram of a system for reproducing two streams obtained by being divided on a frame-by-frame basis and synthesizing the streams in

a time axis in the first example according to the present invention.

**[0117]** Figure 98 is a block diagram of a recording apparatus and a reproduction apparatus for dividing a progressive video signal into two streams and synthesizing the signals into the progressive video signal in the first example according to the present invention.

## BEST MODE FOR CARRYING OUT THE INVENTION

**[0118]** The best mode of the present invention will be described with reference to the figures.

**[0119]** In this specification, a recording and reproduction system for simultaneously reproducing a plurality of streams according to the present invention will be referred to as an "MADM" system.

**[0120]** In the first example of the present invention, a method for recording and reproducing a 3D picture and a high definition picture will be first described, and then a method for realizing the high definition picture will be described, both as applications of the MADM system according to the present invention. In the second through eighth examples, practical methods for synchronization used for reproducing data according to the MADM system will be described.

(Example 1)

**[0121]** According to the present invention, a 3D picture and a wide screen picture are recorded in the state where the picture is divided into two pictures of a right-eye picture and a left-eye picture, or divided into two screen pictures separated from each other along a horizontal line. These two pictures are field pictures starting from an odd line, and a signal representing such a field picture is referred to as an Odd First signal. A progressive picture is recorded as being divided into two screen pictures separated from each other along a vertical line. These two screen pictures are represented by a field signal starting from an odd line and a field signal starting from an even line. These signals are referred to as an Odd First signal and an Even First signal. In this specification, a recording unit of picture information of 1 GOP or more which has been processed with interleaving is referred to as an interleave block or a frame group. The system according to the present invention is referred to as a multiple angle video data division multiplex (MADM) system.

**[0122]** Figure 1 is a block diagram of an MADM system recording apparatus 2 for an optical disk according to the present invention. A progressive signal and a 3D signal can both be recorded. A right-eye signal of the 3D picture is referred to as an R-TV signal, and a left-eye signal is referred to as an L-TV signal. The R-TV signal and the L-TV signal are compressed into MPEG signals by MPEG encoders 3a and 3b. As a result, an R-MPEG signal and an L-MPEG signal as shown in part (2) of Figure 2 are obtained. These signals are proc-

essed with interleaving by an interleave circuit 4, so that an R-frame group 6 including R-frames 5 corresponding to 1 GOP or more of the R-MPEG signal and an L-frame group 8 including L-frames 7 corresponding to 1 GOP or more of the L-MPEG signal are alternately arranged as shown in part (3) of Figure 2. The recording unit is referred to as an interleave block, and may also be referred to as a frame group in this specification. The R-frame group 6 and the L-frame group 8 include an identical number of frames having an identical time period, so that the right-eye signal and the left-eye signal are synchronized with each other when being reproduced. The frame group is also referred to as a picture data unit. One picture data unit corresponds to 0.4 to 1 second. A rotation speed of a DVD is 1440 rpm, i.e., 24 Hz along the innermost track. Accordingly, an interleave block corresponds to one or more rotations or further, 10 to 20 rotations as shown in part (4) of Figure 2. Returning to Figure 1, address information is output from an address circuit 13. Progressive/3D picture arrangement information is output from a progressive/3D picture arrangement information output section 10. These pieces of information are recorded on the optical disk by a recording circuit 9. The progressive/3D picture arrangement information includes an identifier which indicates whether or not a progressive or 3D picture is present on the optical disk, or a progressive/3D picture arrangement table 14 shown in Figure 4. As shown in Figure 4, a TEXTDT file 83 includes, for each VTS, 3D pictures for the right and left eyes and angle numbers and cell numbers in which the progressive signal is located. Since a PGC file of each VTS includes a starting address and a termination address of each cell, the starting address and the termination address of each cell are included in the progressive/3D picture arrangement information. Based on the arrangement information and identification information, the reproduction apparatus outputs a progressive picture or a 3D picture correctly as progressive outputs or R and L outputs. When ordinary pictures of different contents from each other are output as R and L outputs in error, the user will feel uncomfortable since the pictures for the right eye and the left eye are not related to each other. The progressive/3D picture arrangement information or progressive/3D picture identifier have an effect of avoiding the output of such unpleasant pictures. The manner of using the progressive/3D picture arrangement information and progressive/3D picture identifier will be described in detail later together with a description of the reproduction apparatus.

**[0123]** In the recording apparatus shown in Figure 1, a 525P or other progressive signal can be recorded with multiple angles. Specifically, a progressive signal is divided into a sum component and a difference component by a division section 38, thereby creating two interlace signals. The two interlace signals are encoded by the two MPEG decoders 3a and 3b. In this case, a VPTS which is synchronized with an APTS of an audio signal

is provided to a first MPEG signal and a second MPEG signal by a VPTS provision section 81. Such provision will be described in detail later.

**[0124]** A specific method for creating 3D picture arrangement information will be described. A DVD-format optical disk has files of a directory or table of contents stored in a standardized manner in a recording starting area thereof. However, these files do not include any description on 3D pictures. Accordingly, a 3D picture logical arrangement file 53 including a 3D/PG picture logical arrangement table shown in Figure 18 is provided, so that a reproduction apparatus conforming to 3D reproduction reads the file. An ordinary 2D reproduction apparatus cannot read the 3D/PG picture logical arrangement file 53 but provides no problem since such an ordinary 2D reproduction apparatus does not reproduce a 3D picture.

**[0125]** Hereinafter, the table in Figure 18 will be described. DVD video information includes a three-layer logical hierarchy. The three layers are a video title set (VTS) layer representing a movie or other work, a part of video title (PVT) layer representing a chapter in the title, and a cell (Cell) layer representing a stream in the chapter.

**[0126]** The arrangement of 3D pictures in each layer will be described. "000" indicates that there is no 3D or progressive cell; "110" indicates that all cells are 3D cells; and "001" indicates that there are 3D cells and non-3D cells.

**[0127]** In Figure 18, regarding the VTS layer, the status of title 1 is "001"; i.e., the VTS layer of title 1 includes both 3D and ordinary cells. The status of title 2 is "110"; i.e., all the cells in the VTS layer of title 2 are 3D cells. The status of title 3 is "000"; i.e., there are no 3D cells in the VTS layer of title 3. Accordingly, information on 3D pictures is not necessary regarding the lower layers of titles 2 and 3.

**[0128]** Regarding PVT layer of title 1, the status of chapter 2 is "000"; i.e., there are no 3D cells in the PVT layer of chapter 2. The status of chapter 3 is "110"; i.e., all the cells are 3D cells in the PVT layer of chapter 3. The status of chapter 1 is "001"; i.e., there are both 3D cells and the ordinary cells in the PVT layer of chapter 1. Regarding the cell layer of chapter 1, cells 1 and 2 correspond to R and L data of a first stream. Cells 3 and 4 correspond to R and L data of a second stream. In cells 5 and 6, ordinary pictures are recorded. In the embodiment where the 3D/PG picture logical arrangement file 53 is separately recorded on the optical disk in this manner, the conventional file is not altered. Accordingly, compatibility between the 3D/PG pictures and the ordinary pictures is realized. The logical information reveals all the physical information on the optical disk. Accordingly, a malfunction of displaying ordinary pictures of two different contents for the right eye and the left eye is prevented. Moreover, the 3D picture can be appropriately reproduced and decoded so that R and L data are provided to the right eye and the left eye from the correct

output sections.

**[0129]** With reference to the flowchart of Figure 19, a process for determining whether or not each cell includes a 3D or progressive picture based on the 3D/PG picture logical arrangement table 52 will be described. In step 51a, the 3D/PG picture logical arrangement table 52 is read from a first recording area of the optical disk. In step 51b, the VTS layer of title n as shown in Figure 18 is checked. When the status of the VTS layer is "000", it is determined that no 3D or progressive cell is included and thus 3D processing is not performed. When VTS=110 in step 51c, all the cells are processed as 3D cells in step 51d. In step 51e, odd cells are processed as including a left-eye picture and even cells are processed as including a right-eye picture. In step 51f, a menu screen is caused to indicate that all the cells in title n are 3D cells. When VTS=001 in step 51g, the arrangement information of chapter n of the lower layer is checked in step 51i. When PVT=000 in step 51j, it is determined that chapter n include no 3D or PG cells in step 51k. When PVT=110 in step 51m, it is determined that all the cells in chapter n are 3D cells in step 51n. Then, the processing goes to step 51d, where the menu screen indicates that the all the cells in chapter n are 3D cells. When PVT=001 in step 51p, each of the cells in that chapter is checked. When Cell=000 in step 51s regarding one cell, it is determined that the cell is not a 3D cell and the processing goes back to step 51q. When Cell=m-R in step 51u, it is determined that the cell corresponds to R data of stream m in step 51v. When Cell=m-L in step 51w, it is determined that the cell corresponds to L data of stream m in step 51x. Then, the next cell is checked in step 51q.

**[0130]** In the embodiment where the 3D/PG picture logical arrangement table 52 is additionally recorded in this manner, it is effectively determined whether or not each of all the video titles, chapters and cells includes 3D data, PG data or neither of such data.

**[0131]** This will be described with respect to the top view of the optical disk in Figure 3. An optical disk 1 has one spiral track formed therein. The R-frame group 6 is recorded on a plurality of R tracks 11, 11a and 11b. In actuality, the R-frame group 6 is recorded on 5 to 24 tracks. The L-frame group 8 is recorded on L tracks 12, 12a and 12b, and the next R-frame group 6a is recorded on R tracks 11c, 11d and 11e.

**[0132]** Hereinafter, a reproduction operation will be described with reference to the block diagram of the 3D reproduction apparatus according to the present invention in Figure 5 and the timing diagram in Figure 6. When a signal from the optical disk 1 is reproduced by an optical head 15 and an optical signal reproduction circuit 24 and a 3D picture identifier is detected by a 3D picture arrangement information reproduction section 26, or when picture data which has been determined to have a 3D picture based on a 3D picture arrangement table 14 shown in Figure 4 is to be reproduced and an input section 19 or the like issues an instruction to output a

3D picture; a switch section 27 is controlled so that an R signal and an L signal are output from an R output section 29 and an L output section 30 and so that the R and L signals are output alternately on a field-by-field basis from an RL mixture circuit 28. The control of the switch section 27 is performed simultaneously with the processing of the 3D picture.

**[0133]** With reference to Figures 5 and 6, an operation for reproducing a 3D picture will be described. As described with reference to part (3) of Figure 2, the R-frame group 6 and the L-frame group 8 are alternately recorded on the optical disk. The R-frame group 6 and the L-frame group 8 each include frames corresponding to n GOPs, where n is an integer of one or more. Figure 85 represents such a state in detail. Two (right and left) streams are recorded on the disk alternately. Each stream includes intra-frame encoded frame data represented as I and inter-frame encoded frame data represented as B or P, and is divided into interleave units with the intra-frame encoded frame as a disconnection point.

**[0134]** In Figure 6, part (1) shows the entirety of the disk, and part (2) shows a part thereof. An output signal from an optical signal reproduction circuit 24 in Figure 5 is represented as part (2) of Figure 6. The signal is divided into an R signal and an L signal by a switch section 25, and the time axes of the R signal and the L signal are matched to an original time axis respectively by a first buffer circuit 23a and a second buffer circuit 23b. By this operation, input signals, shown in part (4) of Figure 6, to be input to R- and L-MPEG decoders are obtained. The signals are respectively processed by MPEG decoders 16a and 16b in Figure 5. Thus, R and L output signals which are synchronized with each other as shown in parts (6) and (7) of Figure 6 are sent to a picture output section 31. An audio signal is extended by an audio output section 32 and then output.

**[0135]** Since the two (R and L) signals are output simultaneously in this manner, a flickerless picture is obtained by sending a 60 fps (frames/sec.) signal from each of the R output section 29 and the L output section 30 to the 3D TV having two (R and L) outputs. In the embodiment where an RL mixture signal having 60 fields/sec. is sent from the RL mixture circuit 28, a 3D picture can be viewed with an ordinary TV and 3D spectacles, although the picture flickers. In the embodiment where an RL mixture signal having 120 fields/sec. is output, a flickerless 3D picture can be viewed with a 2X scan TV and 3D spectacles. In the case where a 3D picture is not being output as a 3D picture, a signal is added by a "3D" display signal output section 33 so that the TV screen display a symbol indicating "3D". Then, the user is notified that he/she is viewing 3D software in a 2D mode and is urged to switch to the 3D output mode. In the embodiment where a 3D control signal generated by a 3D spectacle control signal generation section 33a for switching right and left shutters of the 3D spectacles is detected from a frame synchronization signal for a decoding signal or from the RL mixture circuit 28 and out-

put to an external device, a synchronization signal for the 3D spectacles is obtained.

[0136] When a line memory **28c** of an n-screen synthesis section **28b** in Figure **90** is used, n pieces of pictures (e.g., two pictures) are output on a TV screen as one NTSC signal picture in which the two pictures are synthesized. Therefore, two angles can be viewed with an ordinary TV. A conventional 1X reproduction apparatus inconveniently displays only one angle at one time out of multiple angles. The present invention allows two streams to be reproduced simultaneously with a 2X reproduction apparatus and the MADM reproduction system, and also allows two screens to be displayed simultaneously. Accordingly, it is not necessary to switch the multiple angles.

[0137] As shown in Figure **90** in detail, when the line memory **28c** of the n-screen synthesis section **28b** is used, a two-picture display **28f** of two pictures A and B having the same size is obtained. Since a line memory has a simple structure and is integrated into an IC, the n-screen picture display is obtained with a simple structure. When a frame memory **28d** is used, a two-picture display **28g** of two pictures having different sizes is obtained by a zoom signal from a zoom signal generation section **28e**. Since the user can arbitrarily set the size by remote control, the TV picture can be advantageously viewed at an optimum size.

[0138] In the block diagram in Figure **5**, two MPEG decoders are used. The structure is simplified by the circuit configuration shown in Figure **7**. The first MPEG signal and the second MPEG signal are synthesized into one MPEG signal by a synthesis section **36**, and a 2X clock is generated by a 2X clock generation section **37**. A 2X calculation is performed by a 2X clock-type MPEG decoder **16c**, and the data is extended and output as R and L video signals through a division section **38**. Such a circuit configuration advantageously limits an increase in the cost since it is only necessary to add a 16 MB SD-RAM to a memory **39** of an existing 2D reproduction apparatus.

[0139] With reference to Figure **7**, synchronous reproduction of two streams which is important in decoding 3D picture data and progressive picture data will be described. First, it is necessary to adjust vertical and horizontal synchronization of two streams within a single line. In order to do this, a first MPEG decoder **16a** and a second MPEG decoder **16b** are started substantially simultaneously by a vertical/horizontal synchronization control section **85c** to synchronize the decoders **16a** and **16b**. Then, it is necessary that the outputs from the two decoders should be pictures having an identical VPTS. This will be described with reference to the flowchart in Figure **57** and Figure **7**. In step **241a**, the synchronization of a first decoder and a second decoder is cancelled. In step **241b**, the decoders are synchronized with each other vertically and horizontally. In step **241c**, an APTS of an audio signal is read, and the APTS value is set as an initial value of an STC of the first decoder

and an STC of the second decoder. In step **241e**, processing of the first decoder is started. In step **241f**, it is checked whether or not a first VPTS has reached the initial value. If yes, decoding is started in step **241g**. In step **241h**, a processing delay time period of the first decoder is calculated, and the VPTS of the decoder output is adjusted so that the APTS and the VPTS are synchronized with each other. Since the second decoder is processed in the same manner, the picture from the first decoder and the picture from the second decoder are synchronized with each other. Thus, the decoder outputs, i.e., the first MPEG signal and the second MPEG signal are synchronized within one line. Then, the synchronization on a dot-by-dot basis is obtained by a video signal synchronization section **36a** of the synthesis section **36**. An original progressive picture is obtained even by a sum calculation. As shown in Figure **5**, in the case where an APTS **84** is read by the audio decoder **16c** and an identical APTS is set in registers **39a** and **39b** of the STCs of the two MPEG decoders **16a** and **16b**, an audio stream and the two video stream are automatically synchronized with one another.

[0140] In the present invention, when the buffer circuits **23a** and **23b** underflow, either one of the pictures is disconnected, as a result of which a disturbed progressive picture is output. In order to avoid this, the buffering amounts of the two buffer circuits are controlled by a buffer amount control section **23c** as shown in Figure **5**. This operation is illustrated in the flowchart shown in Figure **56**. First, in step **240a**, a maximum interleave value among the NAVI information of each disk is read, and a maximum value of 1 ILB in one main interleave block is set. The maximum value is usually 512 sectors, i.e., about 1 MB. When the maximum value is set below 1 MB by a specific format, that value is set as the maximum value. Next, when an instruction to simultaneously reproduce the main and sub interleave blocks is issued in step **240b**, if the buffering amount of the first buffer circuit **23a** is 1 ILB or less in step **240c**, reproduction is performed from the main interleave block, and an instruction to transfer the data to the first buffer circuit **23a** is issued. Then, the processing goes back to steps **240b** and **240c**. The transfer is stopped in step **240d** when the buffering amount of the first buffer circuit exceeds 1 ILB. Since the data in the buffer circuit **23a** becomes 1 ILB or more in this manner, underflow is prevented.

[0141] In step **240f**, a maximum value of a sub interleave block of 1 ILB-Sub is set in the buffer circuit **23b**. Simultaneous reproduction is performed in step **240g**. When the data in the second buffer circuit **23b** is 1/2 ILB-Sub or less, data is read into the buffer circuit in step **240i**. When the data is more than 1/2 ILB-Sub in step **240i**, the reading is stopped in step **240i**.

[0142] As shown in part (4) of Figure **45**, the data amount of 1/2 ILB is sufficient in the second buffer circuit. Accordingly, the buffering amount can be reduced to half. The buffer control in Figure **56** eliminates the underflow of the buffer circuits, thus reducing disturbance

in the synthesized picture during reproduction.

**[0143]** Next, a process for reproducing only an R signal by 1X rotation of the optical disk will be described. The standard rotation speed of a DVD reproduction apparatus is referred to as "1X", and the speed twice the standard rotation speed is referred to as "2X". Since it is not necessary to rotate the motor at 2X, a 1X instruction is sent from a control section 21 to a rotation speed alternation circuit 35 to reduce the rotation speed. A process for reproducing only an R signal at 1X rotation from an optical disk storing the R signal and an L signal will be described with reference to the timing diagram in Figure 8. As described with reference to parts (1) and (2) of Figure 6, the optical disk according to the present invention has the R-frame group 6 and the L-frame group 8 alternately recorded. This is shown in parts (1) and (2) of Figure 8.

**[0144]** A comparison between the signal shown in parts (1) and (2) of Figure 8 and a signal shown in part (3) of Figure 8 corresponding to one rotation of the disk indicates that the optical disk rotates 5 to 20 times while one frame group is reproduced. A track jump of the optical head from the R-frame group 6 to the next R-frame group 6a requires several tens of milliseconds. Where the wait time period is one rotation, which is the maximum, the data in the R-frame group 6a can be reproduced within two rotations. This is shown in parts (4) and (5) of Figure 8, which are timing diagrams of the reproduction signal and the signal corresponding to one rotation of the disk. The time axis of the reproduction signal in part (4) of Figure 8 is adjusted by the buffer circuit 23a in Figure 5, and an MPEG signal having continuous R frames as shown in part (6) of Figure 8 is output from the buffer circuit 23a. This signal is extended to be an R video signal as shown in part (7) of Figure 8 by the MPEG decoder 16a. By selecting a different channel in the same manner as the case of the R signal, a 2D signal of the L channel is obtained. According to the present invention, the R or L channel is assigned to a frame group of 1 GOP or more and the frame group is recorded continuously over a plurality of tracks. Thus, even when a 3D optical disk is reproduced by a 1X reproduction apparatus, a 2D output of only the R channel is obtained.

**[0145]** As can be appreciated from this, as shown in the block diagram of Figure 9, a reproduction apparatus specifically for 2D display is obtained by altering the structure of the 3D reproduction apparatus in Figure 5 so that there is only one buffer circuit 23 in lieu of two, one MPEG decoder 16 in lieu of two, and one picture output section 17. Such a 2D reproduction apparatus 40 includes the 3D picture arrangement information reproduction section 26, and therefore, reproduces a 3D picture identifier and arrangement information of the 3D optical disk 1. Accordingly, when the data in the optical disk 1 is reproduced by the 2D reproduction apparatus, data in either one out of the R and L channels is output. Since the R and L channels correspond to an identical picture,

it is a waste of time to output the pictures in the R and L channels by switching the channels by a channel selection section 20. According to the present invention, a 3D channel output control section 41 restricts data to be output from only either channel, for example, the R channel, using the 3D picture identifier. Thus, data in only the R or L channel of identical video contents is output, avoiding the situation in which the user selects an unnecessary channel.

**[0146]** When a 3D picture is provided, the "3D" display signal output section 23 displays the symbol "3D" on the screen or a display section 42 of the reproduction apparatus. Therefore, the user can recognize that the picture is a 3D picture. The optical disk according to the present invention provides both 2D and 3D pictures when reproduced by the 3D reproduction apparatus 43 in Figure 5 and a 2D picture when reproduced by the 2D reproduction apparatus in Figure 9. In this manner, the compatibility between the 2D reproduction apparatuses and 3D reproduction apparatuses realized.

**[0147]** Now, returning to the 3D reproduction apparatus, use and effect of a 3D picture identifier will be described.

**[0148]** Figure 13 is a timing diagram of a 3D picture identifier and an output signal. One interleave block is defined as a time unit "t". In parts (3) through (6) of Figure 13, a delay time period of 1t is generated although not shown. As shown in part (1) of Figure 13, the state of the 3D picture identifier is changed from "1" to "0" at  $t=t_7$ . As shown in part (2) of Figure 13, the R-frame groups 6, 6a and 6b and the L-frame groups 8, 8a and 8b of a 3D picture are recorded from  $t_1$  through  $t_7$ . From  $t_7$  through  $t_{11}$ , pictures A and B of different contents are recorded. In more detail, first-frame groups 44 and 44a of picture A and second-frame groups 45 and 45a of picture B are recorded. Since the DVD format does not define 3D pictures, a 3D picture identifier is not included in the data or directory information of the disk. Accordingly, a 3D picture arrangement information file needs to be read when the optical disk is started. As shown in parts (3) and (4) of Figure 13, from  $t_1$  through  $t_7$ , data in first time domains 46, 46a and 46b can be output to the R channel, and data in the second time domains 47, 47a and 47b can be output to the L channel. After  $t=t_7$ , no 3D picture identifier is available. Accordingly, data in, for example, first time domains 46c and 46d is output to both the R and L channels. As shown in parts (5) and (6) of Figure 13, a different output system is adopted for a mixture output. From  $t_1$  through  $t_7$  when the 3D picture identifier is "1", even field signals 48 and 48a and odd field signals 49 and 49a are alternately output from one output at a field frequency of 60 Hz or 120 Hz. In more detail, data in the first time domains 46 and 46a is output as the even field signals, and data in the second time domains 47 and 47a is output as the odd field signals.

**[0149]** After  $t=t_7$  when the 3D picture identifier is not available, data in the first time domains 46c and 46d is output as both the even field signals 48d and 48e and

the odd field signals **49d** and **49e**.

**[0150]** As described above, the manner of outputting signals to the 3D display is changed in accordance with whether or not the 3D picture arrangement information indicates the absence of the 3D picture. In this manner, it is prevented that pictures of different contents from each other are presented for the right and left eyes of the user. Without such a function, the following inconvenience occurs. In the case where the first time domain and the second time domain of the optical disk start to include different contents from each other while the user is viewing a right-eye picture and a left-eye picture of the same contents, a picture of content A is presented to the right eye and a picture of content B is presented to the left eye. Such an abnormality makes the user feel uncomfortable.

**[0151]** With reference to the flowchart of Figure 17, the above-described process will be described in detail. In step **50a**, an optical disk is mounted. In step **50b**, a file of a list of contents in the optical disk is read. The file does not include a 3D picture identifier. In step **50c**, a 3D picture arrangement information is read from a TX-TDT file of the disk.

**[0152]** In step **50d**, the list of contents is displayed based on the 3D picture arrangement information. At this point, "3D" is displayed for each of the contents on the menu screen, so that the user can recognize that 3D contents are available. This information can be in one area of the optical disk or included in navigation information provided on a data-by-data basis.

**[0153]** In step **50e**, data in a specific address is reproduced. In step **50f**, it is determined whether or not the data is 3D data with reference to the 3D picture arrangement information. If yes, in step **50g**, signals are decoded. For example, an R signal in the first time domain **46** and an L signal in the second time domain **47** are decoded. The data in the first time domain **46** is output as the right-eye picture, and the data in the second time domain **47** is output as the left-eye picture. The pictures are synchronized. For reproduction of the next data, the processing goes back to steps **50e** and **50f**, where it is determined whether or not the picture is a 3D picture. If no, the processing goes to step **50h**, where the data in either one of the first time domain **46** or the second time domain **47** is output as both the right-eye picture and the left-eye picture. In other words, the same picture is output for the right eye and the left eye. Thus, pictures of different contents are prevented from being output to the right eye and the left eye.

**[0154]** According to the present invention, an ordinary picture and a 3D picture both of the interleave block system are reproduced in different manners. This will be described, hereinafter.

**[0155]** With reference to Figure 14, part (1) shows data recorded on the optical disk. A first interleave block **56** includes data A1 and a leading address a5 of the first interleave block **56** to be accessed next, i.e., the next pointer **60**. Accordingly, as shown in part (2) in Figure

**14**, when reproduction of the first interleave block **56** is terminated, only the address of the pointer **60a** needs to be accessed. Thus, the optical head performs a track jump to access the next first interleave block **56a** within 100 ms and reproduces data A2. Data A3 is reproduced in same manner. In this manner, contents A1 through A3 are reproduced.

**[0156]** Part (3) of Figure 14 is related to an optical disk having 3D pictures for R and L outputs. The optical disk includes the same pointer **60** in order to have the same format as in part (1) of Figure 14 for compatibility. Accordingly, a 3D picture is not reproduced unless the pointer **60** is ignored.

**[0157]** A 3D picture identifier **61** of each cell is defined based on the 3D picture logical arrangement table. Accordingly, 3D picture identifiers **61** of interleave blocks **54**, **55**, **56** and **57** are logically defined. This is shown in part (3) of Figure 14. The pointer cannot be used as it is in order to reproduce data R1 and L1 and then reproduce data R2 and L1 after a track jump. Specifically, when reproduction of the R interleave block **54** is completed, the address of the pointer a5 is not accessed. Rather, after reproduction of the next L interleave block **55**, the optical head performs a track jump to the pointer a5 of the R interleave block. In this case, the pointer **60b** of the L interleave block **55** is ignored. For reproducing an interleave block where the 3D picture identifier is available, it is advantageous to change the manner of accessing the pointer address from the case of the reproduction of an ordinary picture, the advantage being that R and L pictures are continuously reproduced as shown in part (4) of Figure 14.

**[0158]** With reference to flowcharts in Figures 15 and 16, a process of changing the manner of accessing the pointer address when reproducing an interleave block using a 3D picture arrangement information will be described.

**[0159]** In step **62a**, an access instruction to an address of a specific cell is issued. In step **62b**, it is determined whether or not the picture to be accessed is 3D with reference to the 3D picture arrangement information. If the picture is determined not to be 3D in step **62c**, the processing goes to step **62t**, where the picture is processed as an ordinary picture. If the picture is determined to be 3D in step **62c**, the processing goes to step **62d**, where it is checked whether or not the user intends to reproduce the picture as a 3D picture. If no, the "3D" mark is displayed on the screen and the processing goes to step **62t**.

**[0160]** If yes in step **62d**, the 3D picture arrangement information is read in step **62e**, and the locations of the R and L interleave blocks are calculated based on, for example, the chapter number, R cell number and L cell number. In step **62g**, the n'th R interleave block is reproduced. In step **62h**, the pointers recorded in the R interleave block and the L interleave block are read and stored in the pointer memory. In step **62i**, the previous pointer (i.e., the (n-1)th pointer AL (n)) is read from the

pointer memory. In step **62j**, it is checked whether or not pointers AL(n) and AR(n) are continuous with each other. If no, a jump to the address AL(n) is performed in step **62k**.

**[0161]** As shown in Figure 16, in step **62m**, the n'th L interleave block is reproduced. In step **62n**, the first VPTS and the second VPTS are output in synchronization using the pointer AR(n+1). In step **63g**, the first VPTS and the second VPTS are synchronized using APTS of the main interleave block. If in step **63h**, the signal is found to be a PG, i.e., progressive signal, in step **63i**, a sum and a difference of the two decoding output signals are found to and a vertical synthesis is performed. Thus, a picture having an improved vertical resolution such as a 525P picture is obtained.

**[0162]** If the signal is found to be wide 525P(i) in step **63j**, a sum and a difference of the two decoding output signals are found and a horizontal synthesis is performed. Thus, a picture having an improved horizontal resolution such as a wide 525P(i) picture of, for example, 1440×480 pixels is obtained. In step **62p**, it is checked whether or not the reproduction of all the streams is completed. In step **62q**, it is checked whether or not the n'th L interleave block and the (n+1)th R interleave block are recorded continuously with each other. If no, a track jump to the AR(n+1) is performed in step **62r** and the processing goes back to step **62f**. If yes in step **62q**, the processing directly goes back to step **62f**.

**[0163]** In the case where the "3D" mark mentioned regarding step **62t** is not displayed on the screen, the starting address A(1) of cell h is accessed and the first interleave block is reproduced. Then, in step **62u**, the n'th interleave blocks of address A(n) are sequentially reproduced. In step **62v**, the pointer address A(n+1) for accessing the next interleave block by jumping is read. In step **62w**, it is checked whether or not the reproduction of all the data is completed. If yes, the processing goes back to step **62a**. If no, in step **62x**, it is checked whether or not A(n) and A(n+1) are continuous with each other. If yes, the processing goes back to the step before step **62u** without jumping. If no, in step **62y**, a jump to the address A(n+1) is performed.

**[0164]** Figure 20 is a block diagram of a reproduction apparatus 65 according to the present invention. An operation of the reproduction apparatus 65 for reproducing 2X progressive pictures, wide screen pictures and 720P pictures will be described. A signal reproduced from an optical disk 1 is divided by a division section 8 into a first interleave block 66 and a second interleave block 67 each including frames corresponding to 1 GOP or more. The blocks are respectively MPEG-extended into frame video signals 70a and 70b each having 30 frames/sec. The video signal 70a is divided by a field division section 71a into an odd field signals 72a and 73a. The video signal 70b is divided by a field division section 71b into an odd field signals 72b and 73b. Thus, 2-ch NTSC interlace signals 74a and 74b are output. The wide screen picture reproduced by the reproduction apparatus in

Figure 20 will be described later.

**[0165]** With reference to Figure 22, an encoding operation of a progressive video signal will be described. Progressive video signals 75a and 75b are input at time t1 and t2, and divided by a division section 38 into an Odd First interlace signal 244 and an Even First interlace signal 245. Where the n'th line (e.g., 1st line) of the interlace signal 244 is labeled as "An" and the n'th line (e.g., 2nd line) of the interlace signal 245 is labeled as "Bn", a vertical filter 142 performs a sum calculation, i.e.,  $1/2(A_n+B_n)$ , thus obtaining a low frequency component. In other words, a function of an interlace interference removal filter 141 is performed. In the case where the resultant component is reproduced from only one angle by a conventional reproduction apparatus, an NT-SC signal with no interlace interference is obtained. "An" of the interlace signal 244 is also divided by a color division section 242 and input to a color synthesis section 243 without passing through the vertical filter 142. In the color synthesis section 243, the signal from the color division section 242 and the signal from the vertical filter 142 are synthesized ( $1/2(A+B)$ ). Then, the resultant signal is compressed by an MPEG encoder.

**[0166]** A vertical filter 143 performs a difference calculation, i.e.,  $1/2(A_n-B_n)$ , thus obtaining a high frequency component, i.e., difference information. This signal is compressed by an MPEG encoder without being combined with the color signal. Accordingly, the amount of the difference information is advantageously reduced by the amount of the color signal.

**[0167]** Figure 23 is a view representing the concept of the structure of Figure 22. This system is referred to as multiple angle video data division multiplex system (MADM) since a video signal is divided into vertical or horizontal high frequency and low frequency components and recorded in the state of being divided into pictures of multiple angles. As shown in Figure 23, a signal is divided into a basic signal (sum signal) and a sub signal (difference signal) by a sum calculation section 141 and a difference calculation section 143. The resultant signals are MPEG-encoded and then recorded as an interleave block in units of 1 GOP. At this point, the amount of the information can be reduced by 20% by performing 3-2 transform of the basic signal and the sub signal in synchronization with each other. It is efficient to use, as the basic signal, "IBBPBBPBBPBBPBB" which is shown as a main GOP structure 244 used for the ordinary MPEG encoding. In this structure, an I frame 246, B frames 248 and P frames 247 are alternately arranged. In the case of the difference signal, experiments have shown that it is efficient to have a structure including only I frames 246n and P frames 247 due to the profile pattern, for example, "IPPPPPPIPPPPPP" shown in a sub GOP structure 245. The efficiency is improved by changing the setting for the sub GOP structure.

**[0168]** Figure 23 shows an example in which a 525P video signal is divided into two in a vertical direction. Figure 58 (described below) shows an example in which



a 525P video signal is divided into two in a horizontal direction. In an alternative manner, a 60-frame 525P signal is divided by frame division means into 30 odd frames and 30 even frames. In this case, the respective 30P signals are transformed into two 60-field interlace signals, and each of the signals are MPEG-encoded to be recorded in the MADM system. Such encoding is performed in a progressive manner, and therefore encoding efficiency is improved as in the case of the movie. Thus, the recordable time period of the same disk is extended.

[0169] When such a signal is reproduced by a non-MADM reproduction apparatus, a 30P (one-channel) 525 interlace signal is reproduced. Such a signal lacks necessary frames and is distorted.

[0170] When such a signal is reproduced by an MADM reproduction apparatus, a 30P signal as a basic signal and a 30P signal as a sub signal are reproduced. These two 30-frame signals are synthesized into a 60-frame normal 525P signal by frame synthesis means including a frame buffer, and then output.

[0171] When a line doubler is added to an output section for the 525P signal, a 1050P video signal is obtained.

[0172] When a 525 interlace signal is input to a sum signal section of the synthesis section of the MADM reproduction apparatus and the value of 0 is input to a difference signal section of the synthesis section, a 525P picture is obtained. Such a manner of input has the same effect as the line doubler. This method allows even an 525 interlace signal to be output as a 525P signal. Accordingly, all types of pictures can be viewed by simply connecting one cable to a progressive input terminal of the MADM reproduction apparatus.

[0173] In Figure 23,  $1/2(A+B)$  and  $1/2(A-B)$  are used as expressions for calculation for a two-tap filter. The separation frequency corresponds to about 300 scanning lines.

[0174] When a four-tap filter as shown in part (c) of Figure 46 is used, the number of scanning lines corresponding to the separation frequency can be reduced to about 200. An example of using such a frequency will be described. When the amount of information represented by the basic signal is too large to encode the information, it is advantageous to reduce the number of scanning lines corresponding to the separation frequency to less than 300, for example, 220. In this case, the amount of information represented by the basic signal is significantly reduced and thus the information can be encoded. Although the amount of information represented by the sub signal, i.e., difference signal is increased, it is not serious because the difference signal does not include color information and thus originally contains only a small amount of information. Therefore, there is no problem of insufficiency in the encoding capability of the encoder. An original picture is reproduced normally by the following setting. The filter information can be contained in a filter identifier 144 in Figure 50. The filter characteristics are changed in units of 1 cell or 1 GOP

by altering the constant of the sum calculation section and the difference calculation section by filter separation frequency alteration means of the reproduction apparatus with reference to identifiers 100, 101 and 111. By such setting, a high rate picture, which is usually difficult to encode, can be encoded.

[0175] Returning to Figure 22, the MPEG encoder section synthesizes an odd interlace signal 79a and an even interlace signal 80a and also synthesizes an odd interlace signal 79b and an even interlace signal 80b, thus obtaining frame signals 81a and 81b. The frame signals 81a and 81b are compressed by MPEG compression sections 82a and 82b to generate compression signals 83a and 83b. Interleave blocks 84a, 84b and 84c each including 10 to 15 frames of the compression signals 83a and 83b corresponding to 1 GOP or more are generated. Compression signals obtained from an identical progressive signal are provided with an identical time stamp by time stamp provision means, and then the signals are recorded on an optical disk 85.

[0176] The progressive signal recorded on the optical disk 85 is reproduced by a 2X reproduction apparatus shown in Figure 21. The reproduced signal is divided by a division section 87 into a stream of interleave blocks 84a and 84c and another stream of an interleave block 84b. Then, the streams are extended by extension sections 88a and 88b into frame signals 89a and 89b each having 720x480 pixels. The progressive signal is divided by field division sections 71a and 71b into odd fields 72a and 72b, and even fields 73a and 73b on a time axis, as by the reproduction apparatus shown in Figure 20.

[0177] In Figure 21, unlike the apparatus in Figure 20, the odd fields 72a and 72b of channel A 91 and channel B 92 are synthesized by a synthesis section 90 using a sum calculation circuit and a difference calculation circuit. The even fields 73a and 73b are synthesized in the same manner. Thus, channel A 91 and channel B 92 are synthesized in a zigzag manner. As a result, progressive signals 93a and 93b are obtained and output from a progressive video output section 94.

[0178] In this manner, a progressive video signal, i.e., non-interlace NTSC signals of 525 scanning lines is obtained by the reproduction apparatus according to the present invention. In this example, a progressive signal of 480 scanning lines is obtained. The reproduction section 95 performs 2X reproduction.

[0179] Advantageously, a movie or the like recorded in a conventional optical disk are also reproduced as a progressive picture.

[0180] Figure 23 shows an example in which the signal is divided in a vertical direction by the MADM system. With reference to Figure 58, an example in which the signal is divided in a horizontal direction by the MADM system will be described. A wide 525P picture of, for example, 1440x480P has been studied for movies. Such a signal is transformed into an interlace signal of 1440x480i by a 3-2 transform section 174. The signal

is divided by a horizontal filter section **206a** into two in a horizontal direction. Figure **59** illustrates the principle of the filter in parts (a) and (b). As shown in part (b), 1440 dots are divided into odd dots **263a** and **263b**, and even dots **264a** and **264b**. Where the odd dots are labeled as "Xn" and the even dots are labeled as "Yn", a sum signal is obtained by X+Y and a difference signal is obtained by X-Y. As a result, two 525P or 525i signals, each of 720×480, are obtained as shown in part (b) of Figure **59**.

**[0181]** Returning to Figure **58**, the number of horizontal dots of such a horizontal sum signal is reduced to 720. Since the signal is passed through the horizontal filter, however, aliasing distortion is as low as that of an NTSC signal. A conventional reproduction apparatus reproduces only the sum signal and accordingly provides a DVD picture of the same quality. The difference signal represents only a profile formed of line-drawing. However, since the difference signal is restricted by a second video signal output restriction provision section **179** so as not to be reproduced by an ordinary reproduction apparatus, no problem occurs. The sum signal and the difference signal are respectively encoded into MPEG streams by a first encoder **3a** and a second encoder **3b**, and subjected to interleaving in units of an interleave block of 1 GOP or more and MADM-multiplexed.

**[0182]** As shown in Figure **50**, in the case of a movie, a signal is transformed by a 3-2 transform section **174** and MADM-recorded as an MPEG signal together with 3-2 transform information **174a**.

**[0183]** In the case of the movie, 24 frames are reproduced in one second. Accordingly, a 1440×480P progressive picture is reproduced based on two interlace signals by a 2X reproduction apparatus. The scope size of the movie is 2.35:1. The format of 1440×480P is suitable for the scope size of 2.35:1 in terms of the aspect ratio. Thus, a wide screen 525P is effectively reproduced.

**[0184]** When a movie on the optical disk for a 1X interlace reproduction apparatus is reproduced by the reproduction apparatus shown in Figure **20**, a 24-frames/sec. progressive signal is obtained in an MPEG recorder since a movie signal is a progressive signal having 24 frames/sec. The progressive signal is reproduced by detecting that the optical disk includes a movie by detection means or by transforming the 24-frame/sec. signal into a 60-frame/sec. progressive signal by the 3-2 transform section **174**. An interlace picture with no interference is obtained by filtering the progressive signal by a vertical filter with reference to the filter identifier.

**[0185]** An optical disk **85** encoded with reference to Figure **22** is reproduced by the reproduction apparatus **65** conforming to the progressive system. Then, a channel-A interlace signal **74a** is reproduced. A conventional interlace DVD player has only channel A but not channel B. Therefore, when the optical disk **85** according to the present invention is mounted on the conventional interlace DVD player, the channel-A interlace signal is ob-

tained. As can be appreciated, an optical disk according to the present invention provides a progressive signal when reproduced by a reproduction apparatus according to the present invention, and provides an interlace signal of the same contents when reproduced by a conventional reproduction apparatus. Thus, the optical disk according to the present invention realizes complete compatibility even with the conventional reproduction apparatus.

**[0186]** In the MPEG encoder shown in Figure **22**, an interlace interference removal compression filter **141** is provided to significantly reduce the aliasing distortion.

**[0187]** Hereinafter, encoding of a 3D picture will be described in detail.

**[0188]** A right-eye signal **97** and a left-eye signal **98** are input into a recording apparatus **99** in the same manner as the sum signal and the difference signal of the progressive signal described with reference to Figure **22**. Since this is an interlace signal, odd field signals **72a** and **72b** and even field signals **73a** and **73b** are input every 1/60 second. The signals **72a** and **73a** and the signals **72b** and **73b** are synthesized by synthesis sections **101a** and **101b** into 1/30 sec. frame signals **83a** and **83b**. These signals are compressed by compression sections **103a** and **103b** into compression signals **83a** and **83b**. Interleave blocks **84a**, **84b** and **84c**, each including frames of these signals corresponding to 1 GOP or more, are generated. The interleave blocks **84a**, **84b** and **84c** are alternately located and recorded on the optical disk **1**. When data in the resultant optical disk is mounted on the reproduction apparatus shown in Figure **24** for reproduction, the 3D/PG picture arrangement information reproduction section **26** described above with reference to Figure **5** detects a PG identifier in the disk. Therefore, the reproduction apparatus (**104**) is put into a 3D reproduction mode as shown in Figure **24**. The 3D picture in the optical disk is divided by a division section **68** into channel A and channel B. The data in the channels are extended respectively by extension sections **88a** and **88b** and then divided into field signals by field division sections **71a** and **71b**. The operation of the reproduction apparatus up to this point is the same as in the case of Figure **21**.

**[0189]** A feature of the reproduction apparatus shown in Figure **24** is that the field division section **71a** outputs odd field signals and even field signals while switching the output order thereof by an output transform section. When the signals are sent to a progressive TV, i.e., a TV having a field frequency of 120 Hz, the signals are output from a progressive output section **105** in the order of a channel-A odd field signal **72a**, channel-B odd field signal **72b**, channel-A even field signal **73a**, and channel-B even field signal **73b**. Thus, the right-eye signals and the left-eye signals are output alternately and in the order of the odd field and then the even field. Accordingly, a flickerless picture having matching right-eye and left-eye information is obtained through switch-type 3D spectacles.

[0190] When the signals are sent to an ordinary TV, the channel-A odd field signal **72a** and the channel-B even field signal **73b** are output from an NTSC output section **106**. Then, a 3D picture displaying natural motions is obtained through 3D spectacles although the picture includes flicker.

[0191] By combining the progressive system and the 3D picture reproduction system according to the present invention, a high definition 3D picture including a right-eye picture and a left-eye picture is realized. This will be described with reference to Figure **25**. A reproduction apparatus **107** performs 4X reproduction. When reproducing a DVD, 80% of such a transfer rate is sufficient. In the embodiment where interleave blocks **108a**, **108b**, **108c** and **108d** of right progressive signals A and B and left progressive signals C and D are arranged with no interval as shown in Figure **25**, the optical pickup does not need to jump for continuous reproduction. In the case of a DVD, only 80% of the information is reproduced. The reproduction rate can be 3.2X in lieu of 4X in the case of continuous reproduction. Such a continuous arrangement advantageously reduces the reproduction rate.

[0192] The signal is divided into interleave blocks **108a**, **108b**, **108c** and **108d**, and signals for channels A, B, C and D are reproduced. The video signals extended by extension sections **69a**, **69b**, **69c** and **69d** are synthesized by synthesis sections **90a** and **90b** as in Figure **21**, and two progressive signals are output from progressive output sections **110a** and **110b**. The two progressive signals are respectively a right-eye signal and a left-eye signal. Accordingly, a progressive 3D picture is obtained by the reproduction apparatus **107**. When a 4X MPEG chip is used, only one chip is sufficient and avoids an increase in the number of components. The 4X MPEG chip realizes recording and reproduction of pictures of four different contents. In this case, pictures are displayed on a 4-part multi-screen TV simultaneously with one optical disk.

[0193] A feature of the present invention is to provide compatibility among all the apparatuses and media. When data on a disk **106** in Figure **25** is reproduced by a conventional reproduction apparatus, an interlace signal for either the right eye or the left eye is output. The picture is not deteriorated although the reproduction time is reduced to 1/4. However, a two layer DVD stores data for 2 hours and 15 minutes. Almost all movies are accommodated in such a DVD.

[0194] When data on the disk **106** in Figure **25** is reproduced by a 2X 3D/progressive reproduction apparatus according to the present invention, the user switches from a 3D interlace picture to a one-channel progressive picture or vice versa by sending an instruction to a control section **21** through a channel selection section **20** from an input section **19** (see Figure **9**). As described above, the present invention has an effect of providing complete compatibility analogous to that between the monaural records and stereo records discussed in the

past.

[0195] According to the 2X and 4X reproduction apparatuses according to the present invention, pictures of various qualities are obtained in various display manners.

[0196] As described above, according to the present invention, when a 3D identifier is not available, the pointer is read and the optical head jumps. When a 3D identifier is available, the reproduction process is changed so that the pointer of one of the immediately previous interleave blocks is read and accessed. Thus, a 3D picture is recorded without changing the format.

[0197] A method for performing recording and reproduction while a scope-size movie screen is divided into two.

[0198] In Figure **20**, an optical disk **1** having two-screen interlace signals is reproduced. Now, with reference to Figure **40**, this concept is applied to a scope-size (2.35:1) super wide screen **154**. The super wide screen **154** is divided into three, i.e., a center screen **156** and side screens **157** and **158** by a screen division section **155**. The position of division is represented by a center shift amount **159**. The center picture **156d** is compressed as a first video signal. The side pictures **157** and **158** are compressed together as a second video signal. The compression signals are processed with interleaving and are recorded on an optical disk **191** together with the center shift amount **159**. In this case, the second video signal, which represents a picture obtained by sewing together two different quality pictures, is not desired to be output. Accordingly, a second video signal restriction information provision section **179** adds reproduction restriction information such as, for example, password protection to the second video signal stream. Then, the reproduction apparatus cannot reproduce the second video signal independently. In this manner, it is prevented that the user views an abnormal picture of only the second video signal. In this case, a progressive reproduction apparatus reproduces both the first and second video signals to realize a wide screen.

[0199] When such an optical disk is reproduced by the reproduction apparatus in Figure **20**, the second video signal is not independently output. From the optical disk, the center shift amount **159** is reproduced by a center shift amount reproduction section **159b**. A wide picture synthesis section **173** uses the center shift amount **159** to synthesize a scope-size picture. The 3-2 transform section **174** performs 3-2 pull-down transform shown in Figure **41** to transform a 24-frame/sec. signal of the movie into a 60-fields/sec. interlace signal or a 60-frames/sec. progressive signal. As shown in Figure **41**, both the extension and wide picture synthesis are performed. The 3-2 transform performed by the 3-2 transform section **174** is as follows. A synthesis picture **179a** having 24 frames/sec. is transformed into three interlace pictures **180a**, **180b** and **180c**. A synthesis picture **179b** is transformed into two interlace pictures **180d**

and **180e**. Thus, the picture having 24 frames/sec. is transformed into a 60-fields/sec. interlace picture. A progressive picture **181** can be output as three progressive pictures **181a**, **181b** and **181c** and two progressive pictures **181d** and **181e**.

[0200] Another method for dividing a screen is as follows. As shown in Figure 40, a 1440×480 screen **154** is divided into two horizontal separation screens **190a** and **190b** each having 720×480 pixels. Such division is performed by separating odd number of columns of pixels from even number columns of pixels by a picture horizontal division section **207**. These screens **190a** and **190b** are compressed as a first video signal and a second video signal in a similar manner to the above-described manner and recorded on the optical disk **191**. In order to avoid aliasing distortion, two pixels are added by a horizontal filter **206** shown in Figure 46 at a specific addition ratio, so that the high frequency component in the horizontal direction is attenuated. Such processing avoids generation of moiré, which appears when the optical disk is reproduced by an existing reproduction apparatus at 720 dots.

[0201] When the optical disk **191** is reproduced by the reproduction apparatus **65** shown in Figure 20, the horizontal separation screens **190a** and **190b** are decoded. When the decoded signals are synthesized by the wide picture synthesis section **173**, an original 1440×480-pixel screen **154a** is obtained. In the case of movies, 3-2 transform is performed by synthesizing the screen **154a** as shown in Figure 41.

[0202] The second method of horizontally dividing the screen is advantageous in providing a level of high compatibility for the following reason. The first video signal and the second video signal both represent an ordinary 720×480-pixel picture obtained by dividing the original 1440×480-pixel picture into two by a horizontal line. Accordingly, even when the second video signal is erroneously reproduced by an ordinary reproduction apparatus such as a DVD player, the resultant picture has the same aspect ratio as that of the original picture. Such a division system advantageously realizes reproduction of an interlace picture by an ordinary reproduction apparatus, reproduction of a 525 progressive picture by a progressive reproduction apparatus, and reproduction of a wide screen picture having a scope of, for example, 720P by a 720P high resolution reproduction apparatus. Such advantages are conspicuous in the case of movies, which can be reproduced at the rate of 2X.

[0203] This method is applied as shown in Figure 44. A 1440×960 progressive picture **182a** is divided in horizontal and vertical directions by a horizontal and vertical division section **194** of a picture division section **115** using, for example, sub-band filter or wavelet transform. Then, a 525 progressive picture **183** is obtained. This is divided into interlace signals **184** and recorded as a stream **188a**.

[0204] Interpolation information **185** is divided into four streams **188c**, **188d**, **188e** and **188f** in a similar

manner and recorded in units of an interleave block. The maximum transfer rate of each interleave block is 8 Mbps by the DVD format. When the interpolation information **185** is divided into four streams, the transfer rate of 32 Mbps is obtained. In the case of six angles, the transfer rate of 48 Mbps is obtained. Thus, 720P and 1050P HDTV pictures can be recorded. In a conventional reproduction apparatus, a stream **188a** is reproduced and an interlace picture **184** is output. Regarding the streams **188c**, **188d**, **188e** and **188f**, output restriction information is recorded on an optical disk **187** by a picture processing restriction information generation section **179**. Therefore, an ugly picture of interpolation information **185** such as differential information or the like is not output in error. An optical disk compatible with HDTV and NTSC is realized by dividing a signal in a horizontal direction by the system shown in Figure 44.

[0205] In Figure 20, an interlace signal is obtained by the transform performed by the interlace transform section **175**, and as a result, a scope-size screen **178** is obtained. A 525P progressive signal is also output on a scope-size screen in a similar manner. When viewed by a 720P monitor, a 525P signal is transformed into a 720P progressive signal by a 525P/720P transform section **176**, as a result of which a letter box-type 720P screen **177** having 1280×720 or 1440×720 pixels (picture has 1280×480 or 1440×480 pixels) is output. A scope-size picture (2.35:1) has 1128×480 pixels. A picture having a similar aspect ratio to this is obtained. A movie signal has 24 frames/sec. Therefore, the transfer rate of the progressive picture is 4 Mbps. When the scope-size picture is recorded by the 2-screen system according to the present invention, the transfer rate is 8 Mbps. Since a two-layer DVD can store data for about 2 hours and 15 minutes, a 720P or 525P high definition progressive picture can be recorded on one optical disk. Such data is output on a conventional TV as an interlace signal, needless to say. As described above, the scope-size (2.33:1) picture of the movie can be output as a 525P or 720P picture.

[0206] Hereinafter, a specific method for recording and reproducing a 1050 interlace signal will be described. An even field **208a** of a 1050 interlace signal is divided into two pictures **208b** and **208c** by horizontal division means **209**. Two pictures **208b** and **208c** are respectively divided by vertical division means **210a** and **210b** to obtain pictures **208d** and **208e**, and **208f** and **208g**. An odd field **211a** is divided in a similar manner to obtain pictures **211d**, **211e**, **211f** and **211g**. In this case, the pictures **208d** and **211d** act as main signals and an interlace picture is output by an existing reproduction apparatus. Horizontal filters **206b** and **206c** and vertical filters **212a** and **212b**, inserted for preventing interlace interference and the like, reduce aliasing distortion of the reproduced picture.

[0207] With reference to Figures 27, 28, 42 and 49, the file structure and identifiers for pictures will be described. Figure 27 shows a logical format of DVD. Each

logical block includes a video file. As shown in Figure 28, a minimum unit of a system stream is referred to as a "cell". In a cell, picture data, audio data and sub picture are recorded in a packet in units of 1 GOP.

[0208] A cell 216 (see Figure 18) of a main signal of a first stream has a packet 217. A provider defined stream in the packet 217 has a capacity of 2048 bytes. The provider defined stream includes a progressive identifier 218 indicating whether the signal is progressive or interlace, a resolution identifier 219 indicating whether the resolution is 525, 720 or 1050, a differential identifier 220 indicating whether or not the interpolation signal is a differential signal from the main signal, a filter identifier (described later), and sub stream number information 221 indicating the stream number of a first sub stream.

[0209] With reference to Figure 52, a process for performing reproduction using a picture identifier 222 will be described.

[0210] From the optical disk, reproduction process control information 225 is first read from management information 224. Since the information 225 includes restriction information on VOB, a 0th VOB 226a is only connected to a first VOB 226b having a main picture in an existing reproduction apparatus. Since the 0th VOB 226a is not connected to a second VOB 226c having an interpolation signal such as differential information, an ugly picture such as differential information is not output by the existing reproduction apparatus. Each VOB of the main signal has a picture identifier. Since the progressive identifier=1 and resolution identifier=00 (525) in the first VOB 226b and the second VOB 226c, a progressive signal having 525 scanning lines is reproduced from a progressive or high definition HD reproduction apparatus.

[0211] In a picture identifier 222 of the next VOB 226d, the progressive identifier=0 and the resolution identifier 219=10. An interlace signal having 1050 scanning lines is output. VOBs 226e, 226f and 226g are interpolation information. Thus, an NTSC signal is output by a conventional reproduction apparatus, an interlace signal having 720 horizontal pixels and 1050 vertical pixels is output by a progressive reproduction apparatus, and a full HDTV-format signal having 1050 scanning lines is output by a high definition reproduction apparatus. The picture identifier 222 can be recorded in the management information 224.

[0212] With reference to Figure 53, the relationship among VPTS (video presentation time stamp) of the sub track of interleave blocks, i.e., decoding output time, will be described. In the first VOB 226b as the main signal, interleave blocks 227a, 227b and 227c are recorded together with VPTS1, VPTS2 and VPTS3. In the second VOB 226c, interleave blocks 227d, 227e and 227f are recorded together with VPTS1, VPTS2 and VPTS3. A conventional player reproduces the interleave blocks 227a, 227b and 227c at 1X. Since the main signal includes an audio signal, the audio signal is also repro-

duced. A progressive player first reproduces the interleave block 227d of the second VOB 226c as a sub signal and stores the block in a buffer memory. After the storage, the progressive player reproduces the interleave block 227a of the first VOB 226b. The audio and video signals are synchronized with the synchronization information of the interleave block 227a. Since the audio signal is included in the main signal, the main signal and the sub signal shown in parts (2) and (3) of Figure 53 are output in synchronization with the audio signal. In this case, a track jump is performed between the interleave blocks 227a and 227e.

[0213] Thus, a progressive signal shown in part (4) of Figure 53 is output. By checking the VPTS of the interleave blocks by the reproduction apparatus, the main signal and the sub signal are decoded in synchronization and synthesized, thereby obtaining a normal progressive signal.

[0214] Figure 54 shows an arrangement of signals in a simultaneous cast system by which an NTSC signal and an HDTV signal are recorded as interleave blocks independently at the same time. In the VOB 227a as the main signal, a video signal and an audio signal 232 are recorded. In the VOBs 227b and 227c, an HDTV compression video signal corresponding to about 16 Mbps is recorded, 8 Mbps for each, by the interleave system. A conventional player and a progressive player shown in parts (1) and (2) of Figure 54 reproduces an NTSC (525i) signal. An HDTV player shown in part (3) of Figure 54 reproduces a 16 Mbps HDTV signal as a result of obtaining only audio data from the first VOB 227a, reproducing a first sub picture and a second sub picture from the VOBs 227b and 227c, and synthesizing these data. Since the reproduction of the sub signals is restricted by the reproduction process control information 225, an existing DVD player does not reproduce an HDTV compression signal even when the user erroneously operates the player. Thus, an NTSC signal is output by the existing player, and an HDTV signal is output by the HDTV player. Figure 55 is a block diagram of a reproduction apparatus. The operation of the reproduction apparatus is not described in detail since it is similar to the operations described above. A reproduction signal from the optical disk is divided by an interleave block division section 233. A main signal is decoded by an audio decoder 230 of an NTSC decoder 229, and a first sub signal and a second sub signal which are each an 8 Mbps stream, are decoded by an HDTV decoder 231. Thus, an HDTV signal and an audio signal are output. The data in the optical disk is reproduced as an NTSC signal even by a conventional reproduction apparatus by simultaneous casting. Moreover, according to the present invention, a transfer rate of 16 Mbps is obtained when two interleave streams are used. Accordingly, a standard HDTV MPEG-compression signal is recorded as it is. With a DVD, a transfer of only 16 Mbps is obtained with two interleave blocks. Since an HDTV compression video signal is a 16 Mbps signal, audio data

cannot be recorded. According to the present invention, audio data of the NTSC signal of the main signal is used. Therefore, an audio signal can be recorded even when an HDTV signal is recorded with two interleave blocks.

**[0215]** Now, a method for removing interlace interference will be described. When a progressive signal is transformed into an interlace signal by removing unnecessary components, aliasing distortion is generated and thus a moire of a low frequency component is generated. A 30 Hz line flicker is also generated. In order to avoid these inconveniences, the signal needs to be passed through interlace interference removal means. Interlace interference removal means **140** is added to a progressive signal section of a progressive/interlace transform section **139** of the recording apparatus in Figure **22** (described above). When a progressive signal is input, the interlace interference removal means **140a** detects a video signal having a high probability of being interfered with from the input progressive signal, and passes only such a video signal through an interlace interference removal filter **141**. For example, in the case of a picture having a low vertical frequency component, interlace interference does not occur. In such a case, the filter is bypassed by a filter bypass route **143**. Such an operation alleviates the deterioration in the vertical resolution of the picture. The interlace interference removal filter **141** includes a vertical filter **142**.

**[0216]** In part (a) of Figure **46** (time and space frequency diagram), the hatched area represents an aliasing distortion generation area **213**.

**[0217]** The aliasing distortion generation area **213** can be removed by a vertical filter. Specifically, as shown in part (c) of Figure **46**, three line memories **195** are provided. Regarding a progressive signal having 480 lines, picture information on the target line ( $n$ 'th line) and picture information on the immediately previous and subsequent lines ( $(n-1)$ th line and  $(n+1)$ th line) are added together by an adder **196**. Thus, information of one line is obtained, and **240** interlace signals are generated. Such processing filters the information in a vertical direction, resulting in alleviation in the interlace interference. By changing the adding ratio of the three lines, filter characteristics can be changed. This is referred to as a "vertical three-line tap filter". By changing the adding ratio of the center line with respect to the immediately previous and subsequent lines, a simpler vertical filter can be obtained. As shown in part (d) of Figure **46**, line information can be processed with a vertical filter after, for example, the  $(n-1)$ th line of the previous frame and the  $(n+1)$ th line of the subsequent frame (even lines) are developed on an identical space, in lieu of a simple vertical filter. Such a time vertical filter **214** has an effect of alleviating interlace interference, which occurs when a progressive signal on the optical disk is reproduced by a non-progressive player and only an interlace signal is listened. A horizontal filter **206a** is realized by adding two pixels in a horizontal direction to synthesize one pixel. Needless to say, however, such a filter deteriorates

the resolution of the progressive picture. The filter effect is alleviated by preventing filtering on a picture having a low probability of being interfered with or by changing the adding ratio to realize a vertical filter. When the filter effect is weakened, the deterioration in the resolution of the progressive picture is alleviated. A progressive reproduction apparatus according to the present invention filters the information sufficiently to remove interlace interference during reproduction, so that it is not necessary to filter the information when being recorded. When such progressive reproduction apparatuses replace the existing reproduction apparatuses in the future, filtering during recording will not be necessary. In such a case, there will be both filtered optical disks and unfiltered optical disks. The interlace interference removal means **140** outputs an interlace interference removal identifier **144** to check whether or not the picture has been filtered and records the information on the optical disk **85** by recording means **9**.

**[0218]** With reference to Figure **50**, a specific method for recording a filter identifier will be described. A filter identifier **144** is put in a header in 1 GOP, which is an MPEG recording unit in one stream. "00" indicates that the signal is not filtered. "10" indicates that the signal has been passed through a vertical filter. "01" indicates that the signal has been passed through a horizontal filter. "11" indicates that the signal has been passed through a vertical and a horizontal filter. Since the filter identifier **144** is put in the minimum unit of 1 GOP, the filter can be turned on or off in units of 1 GOP in the reproduction apparatus. Accordingly, deterioration of the picture quality by double filtering is avoided.

**[0219]** With reference to parts (a) and (b) of Figure **32**, an operation of a reproduction apparatus **86a** for reproducing an optical disk **85** will be described. As in Figure **21**, two interlace pictures **84a** and **84b** are reproduced to synthesize a progressive picture **93a**. Notably, when the interlace interference removal filtering identifier **144** is "ON" or when special reproduction such as "slow" or "still picture" is not performed and a progressive picture is not output either, an interlace signal is output directly by an interlace output section at 1X. This is energy efficient.

**[0220]** When special reproduction is performed or when the interlace interference removal filtering identifier **144** is off, a "2X" instruction **146** is sent from a control section **147** to a motor rotation speed alteration section **35**. Then, the optical disk **85** rotates at 2X, and a progressive picture is reproduced.

**[0221]** A method for removing interlace interference when the progressive picture reproduced in this manner is output to an interlace TV **148** as an interlace signal will be described. When the interlace interference removal filtering identifier **144** is off, a determination switch circuit **149** is switched to pass the progressive signal through the interlace interference removal filtering identifier **144**. Then, two frames **93a** and **93b** are transformed by an interlace transform section **139** into

odd and even interlace signals **72a** and **73a**. Thus, an ordinary interlace signal is output. In this case, a picture with no interlace interference is displayed on the interlace TV **148**. Since the interlace interference removal filter does not influence the interlace signal significantly, the interlace signal is not deteriorated. A progressive signal with no interlace interference removal filter is output to a progressive signal output section **215**. By the system of turning on and off the interlace interference removal filter by the reproduction apparatus, a progressive picture with no quality deterioration and an interlace picture with no quality deterioration such as interlace interference are both obtained.

**[0222]** When slow reproduction of a speed of 1/2 or less and still picture reproduction is performed, the removing filter is weakened since the interlace interference is alleviated.

**[0223]** Next, a method for improving special reproduction will be described. When an instruction to perform a slow or still picture reproduction is issued from the control section **147** through an operation input section **150** to slow/still picture reproduction means **151**, the interlace transform section **149** divides the 480 lines of the frame **93a** into two fields using a frame processing section **152** to create and output an odd interlace signal **72b** and an even interlace signal **73b**. Then, a low or still interlace picture having a resolution of 480 with no blurring is displayed on the interlace TV **148**. In a conventional interlace reproduction apparatus, the resolution needs to be lowered to 240 in order to obtain a slow or still picture with no blurring. According to the present invention, a slow or still picture having a resolution of 480 with no blurring is obtained by transforming the interlace signal into a progressive signal once and then transforming the progressive signal back to the interlace signal. Figure **32** illustrates this process in the flowchart in part (a) (steps **153a** through **153g**). The detailed description of the flowchart is omitted.

**[0224]** With reference to Figure **26**, a method for outputting streams in two channels continuously will be described. The two-channel streams are recorded on an optical disk as pictures in cameras 1 and 2 by an interleave system. A first stream from the disk is reproduced and then switched to a second stream.

**[0225]** With reference to Figure **35**, a method for switching a specific stream to another stream smoothly with no disconnection when the contents of the optical disk include a plurality of streams, i.e., when a plurality of streams are multiplexed will be described. As shown in part (1) of Figure **35**, an optical disk **106** includes two different streams as a first stream **111** of a first video signal and a second stream **112** of a second video signal. The two streams are basically recorded substantially at the same radius.

**[0226]** Usually, only the first video signal as a basic stream is reproduced. Accordingly, a first stream **111a** is reproduced and then a first stream **111b** is continuously reproduced. When the user issues an instruction

to switch the first video signal to the second video signal from an instruction input section **19** in Figure **5** at time  $t=t_c$ , a tracking control circuit **22** in Figure **5** is used to access a track at a different radial position, thereby outputting a second stream **112b** of the second video signal at time  $t=t_c$ .

**[0227]** Thus, as shown in part (2) of Figure **35**, the first video signal is switched to the second video signal seamlessly with no disconnection at time  $t=t_c$  in terms of the video, audio and sub picture signals.

**[0228]** A method for realizing such a seamless reproduction by synchronizing the video, audio and sub picture signals will be described later.

**[0229]** With reference to a timing diagram of parts (3) and (4) of Figure **35**, a specific method for reproducing data will be described. As described with reference to the block diagram of Figure **22**, a progressive picture as the first video signal is divided into main interlace video signals A1 through An (Odd First) and sub interlace video signals B1 through Bn (Even First). The signals are recorded separately in first-angle and second-angle sub channels. Although not described with reference to Figure **22**, a progressive picture as the second video signal is also divided into main interlace video signals C1 through Cn and sub interlace video signals D1 through Dn. The signals are recorded separately in third-angle and fourth-angle sub channels as shown in part (3) of Figure **35**. Part (3) of Figure **35** is a timing diagram of the principle shown in Figure **36**. The operation is the same.

**[0230]** Figure **36** puts a focus on an interleave section of the recording apparatus shown in Figure **22**. A progressive signal as the first video signal is divided by a first video signal division section **78a** into a main signal (Odd First) and a sub signal (Even First). The amount of information can be reduced by finding a differential signal between the main signal and the sub signal by a differential section **116a** and compressing the main signal and the sub signal to be recorded on the disk. In the case of a progressive signal, the correlation between adjacent odd and even lines is quite strong, and accordingly the amount of information of a differential signal between the two lines is small. Thus, the amount of information to be recorded can be significantly reduced by finding the differential signal.

**[0231]** According to the present invention, the signals are recorded in a divided manner using the differential device **116a** as shown in Figure **44**. A 720P signal, i.e., a progressive picture having 720 lines or a 1050P signal is divided by the picture division section **115** into 525 basic information **187**, progressive picture **183** (or 525 interlace picture **184**) and interpolation information **186**. Differential information **185** between the basic information **187** and the interpolation information **186** is obtained by the differential device **116a**. The differential information **185** is divided by a second video signal division section **78c** and a third video signal division section **78d** into four streams **188c**, **188d**, **188e** and **188f**.

These streams are sent to a compression section **103** and processed with interleaving by an interleave section **113a**. Thus, six streams are recorded in the angles on an optical disk **187**.

[0232] At this point, the streams **188c**, **188d**, **188e** and **188f** are differential information or interpolation information, and thus do not provide a normal picture when being decoded by the reproduction apparatus and output onto a TV screen. Such an abnormal picture makes the viewer feel uncomfortable. In order that the streams **188c**, **188d**, **188e** and **188f**, including the interpolation information **186**, recorded in different angles not be output by a non-progressive reproduction apparatus, restriction information is generated by the picture output restriction information generation section **179** and recorded on the optical disk **187**. Specifically, such information prevents a specific stream from being opened without a password. Processing the streams **188c**, **188d**, **188e** and **188f** with such password protection prevents a conventional reproduction apparatus from opening these streams and avoids the situation where the user views the abnormal picture obtained by decoding the interpolation information.

[0233] Returning to Figure **36**, the first video signal is thus compressed, so that the main signal of the first video signal is divided into A1 and A2 interleave blocks **83b** and **83d**, each including 1 GOP or more. The main signal of the second video signal is divided into C1 and C2 interleave blocks **83a**. The sub signal of the second video signal is divided into B1 and B2 interleave blocks **83e** and **83g** and D1 and D2 interleave blocks **83f** and **83h**. As shown in Figure **36**, a recording stream **117** is generated from these four pieces of data. In the recording stream **117**, the blocks are arranged in the order of A1, B1, C1, D1, A2, B2, C2, and D2. The recording stream **117** is recorded on an optical disk **115** by recording means **145**. A1, B1, A2 and B2 correspond to the first video signal of the progressive signal. Accordingly, the signals are recorded on the optical disk **115** in the order of the first video signal, the second video signal, the first video signal and the second video signal. A seamless reproduction performed by the AV synchronization section will be described later.

[0234] In the above description, 1 GOP or more of the MPEG signal is recorded in each interleave block. Precisely, one interleave block is restricted to about 0.5 seconds or less. Therefore, only 30 fields of a video signal can be recorded at the maximum. Accordingly, only 30 GOPs can be recorded in one interleave block at the maximum. One interleave block of the present invention is limited to 1 GOP or more and 30 GOP or less.

[0235] A method for compression will be described. Interlace signals **79a** and **80a** of a first VOB **118** are put together as a field pair **125a** and encoded by a frame encoding section **123a** into a frame encoded signal **127a**.

[0236] A dummy field **121** of a second VOB **119** is first encoded by a field encoding section **124b** in a compression

section **82b** on a field-by-field basis into a field encoded signal **129**. Next, an even interlace signal **80b** and an odd interlace signal **79b**, which are sub signals, are put together as a first field pair **126a**, frame-encoded by a frame encoding section **123b** in the compression section **82b** into a frame encoded signal **128a**.

[0237] Thus, an Odd First dummy field is added to the second VOB **119**. Thus, the second VOB signal **119** starts with an odd interlace signal. Since the signals are recorded in the order of an odd interlace signal and then an even interlace signal, the signals are reproduced smoothly by a DVD player. In this case, one progressive signal corresponds to frame encoded signals **127a** and **128a**. Due to the field encoded signal **129** obtained from the dummy field, there is an offset time period **130** of td between the frame encoded signal **127a** from the main signal and the frame-encoded signal **128a** from the sub signal. Accordingly, it is required to output the sub signal earlier by the offset time period when reproducing the progressive signal.

[0238] With reference to Figure **34**, the operation of the reproduction apparatus **86** described referring to Figure **21** will be described in more detail. A signal from the reproduction section **95** is divided into a first VOB **118** as the main signal and a second VOB **119** as the sub signal. The first VOB **118** originally starts with an odd line and thus can be extended as it is. The second VOB **118** has a dummy field **129** at the start thereof for authoring. Reproduction of the second VOB **118** as it is results in generating an offset time period **119** of td between the main signal and the sub signal. Since it is time-consuming to synthesize the first progressive signal in such a case, a picture corresponding one VOB and a picture corresponding the next VOB are not continuous. In order to avoid this, the present invention provides two method for skipping a dummy field **121**.

[0239] According to a first method, a field encoded signal **129** at the start of the second VOB **119** is once input to an extension section **132**. When progressive identification information is detected during or after field extension, a progressive processing switching section **135** is switched to Yes. Thus, the dummy field **121** is skipped by dummy field bypassing means **132** so that an even interlace signal **80b** is first output and then an odd interlace signal **79b** is output. This signal is synchronized by synchronization means **133** with an audio signal **134** and a sub picture signal **135** such as subtitles which are recorded in the main signal. As a result, progressive pictures **93a** and **93b** are output through a progressive transform section **90**. In the embodiment where the dummy field **121** is bypassed in this manner, an odd field and an even field are output in synchronization with each other. Thus, a progressive signal, an audio signal and a sub picture signal with matching time axes are output. When progressive identification information is absent, the progressive switching section **135** is switched to No, and thus the dummy field **121** is not bypassed. Progressive transform is not performed. Thus,



an interlace signal **136** is output. Such an output of the interlace signal **136** occurs in a conventional DVD player without a progressive function. As described above, the dummy field bypassing means **132** is turned on for processing a progressive signal. Otherwise, the dummy field bypassing means **132** is turned off, so that an ordinary field encoded interlace signal is normally output without dropping the field.

**[0240]** A second method is used when the dummy field **129** is field-encoded into 1 GOP frames and can be separated from the frames of the sub signal. Before decoding, the field encoded signal **129** obtained by encoding the dummy field is skipped by 1 GOP by dummy field encoded information bypassing means **137**. The skipped information is input to a buffer **131b**, or skipping is performed when data is output from the buffer. To the extension section **88b**, only the frames of the sub signal paired with the main signal or field information is input. Thus, by ordinary means described above referring to Figure **21**, the even interlace signal **80** and the odd interlace signal **79b** are extended, interlace-transformed, synchronized with the main signal, and transformed into progressive signals **93a** and **93b** by the progressive transform section **90**.

**[0241]** According to the second method, the dummy field is removed while the dummy field is in the form of the encoded information. Therefore, the dummy field is not required to be processed by the buffer section **131b** or the extension section **88**. This method is appropriate for putting a field encoded in units of 1 GOP to the start of the second VOB.

**[0242]** According to the first method, the dummy field **129** and the field signals in each frame **127a** are field-encoded together to generate a unit of 1 GOP. This is efficient where a dummy field is inserted at the start of one interleave block in, for example, a seamless multiple angle system having a high recording efficiency. The first method has an effect of extending the recording time period.

**[0243]** By skipping the dummy field **121** only for progressive processing in this manner, progressive pictures can be reproduced with no disconnection at the border between adjacent VOBs or between interleave blocks in the case of a seamless multiple angle system.

**[0244]** Such processing will be described with reference to the flowchart in Figure **37**. In step **138a**, an instruction to start reproduction of (2n-1)th angle data is issued. In step **138b**, whether or not a progressive identifier is present is checked. If yes, the processing jumps to step **138f**. If no, in step **138c**, whether or not the following three conditions are fulfilled is checked. Condition 1 is that there is one field (or an odd number of pieces of fields) of GOP at the start of the n'th angle VOB. Condition 2 is that one field of GOP is not existent continuous to one field of GOP. Condition 3 is that the leading GOP of the (2n-1)th angle does not correspond to one field. Then, in step **138d**, whether or not the three conditions are fulfilled is checked. If no, in step **138e**,

interlace processing is performed to output only the (2n-1)th angle. If yes, in step **138f**, the processing is switched to progressive processing. In step **138g**, whether or not the reproduction is to be performed from the start of the (2n-1)th angle VOB is checked. If no, the processing jumps to step **138j**. If yes, in step **138h**, the n'th angle VOB is output while dropping the picture of the first one field or GOP corresponding to one field. When the (2n-1)th angle includes an audio signal, the VOB is output while skipping the first offset time period dt (default value: 1/60 sec.). In step **138j**, the main signal of the (2n-1)th angle and the sub signal of the 2n'th angle are decoded, synchronized and synthesized into a progressive signal. In step **138k**, a progressive picture is output. When a seamless multiple angle output is performed in step **138m**, the processing advances to step **138n**, where each interleave block of the (2n-1)th angle (i.e., sub signal) is field-decoded, and the output is performed while the first block is skipped. Alternatively, the outputting order of the odd lines and the even lines is inverted at the time of interlace transform. In step **138p**, the progressive picture is synthesized and output.

**[0245]** Due to authoring, several seconds of dummy field is inserted at the start of the multiple angle VOB. The dummy field group at the start of the VOB is read. In a similar manner, the leading address at which the multiple angle VOB starts is read from the PGC data. For ordinary reproduction, data is read from the start of the VOB. For only 3D or progressive reproduction, the dummy field is skipped and the data is read from the starting address of the VOB corresponding to each of the multiple angle VOB. Thus, 3D or progressive pictures are prevented from being interrupted at the border of adjacent VOBs.

**[0246]** So far, the MADM system has been described. Hereinafter, a provider defined stream picture division multiplex system (PSDM) as another system will be described. Figure **61** is a block diagram of the PSDM system of a vertical division system. Figure **62** is a block diagram of the PSDM system of a horizontal division system. Figure **63** shows a signal format of the PSDM system.

**[0247]** As shown in Figure **63**, a DVD video signal has 10.08 Mbps, and a provider defined stream is defined separately from a basic stream. A sum signal described with reference to Figure **23** can be added to the basic stream and put into the provider defined stream. Such a signal can be reproduced by changing the circuit even with a normal 1X drive. According to the experiments performed by the present inventors, a satisfactory progressive picture is obtained when the sum signal is 6 Mbps and the difference signal is 3 Mbps. Thus, a satisfactory progressive picture is obtained unless the encoding is difficult.

**[0248]** In the case of a movie, which contains a progressive picture of 241 frames, a sufficient picture is obtained by the PSDM system. The system shown in Figure **61** is basically the same as those shown in Figures

**22** and **23**. In the latter half of the production of the disk, a sum signal is recorded in the basic stream with a basic stream identifier being added thereto in an authoring section, and a difference signal is recorded in a provider defined stream with a provider defined stream identifier being added thereto. In the case of a movie, a 3-2 transform identifier synchronized with the sum and difference signals is added.

**[0249]** The reproduction apparatus decodes the sum signal from a packet provided with the basic stream identifier **267** by a first decoder **69a**, and decodes the difference signal from a packet provided with the provider defined stream identifier **268**. Signals A and B are obtained by a sum calculation section **250** and a difference calculation section **251**. Thus, a 525P signal is synthesized.

**[0250]** Figure **62** shows a system for dividing a wide 525P signal in a horizontal direction and PSDM-recording the resultant signal as two interlace signals, like in Figure **58**.

**[0251]** With reference to Figure **26** and part (3) of Figure **35**, a process for reproducing the optical disk **155** and switching the first video signal to the second video signal at  $t=t_c$  will be described. As shown in Figure **26**, the optical disk **155** (provided as an example of an optical medium) has four channel stream recorded by an interleave system. The streams are recorded in the order of A1, B1, C1, D1, A2, B2, C2, D2, A3, B3, C3 and D3 in interleave units of 1 GOP. Since the first video signal is first output, interleave blocks (hereinafter, referred to simply as "ILB") **84a** and **84b** (i.e., A1 and B1) are continuously reproduced and a track jump **156** is performed, thus reproducing ILBs **84e** and **84f** (i.e., A2 and B2). When the first video signal is switched to the second video signal at  $t=t_c$ , a track jump **157** is performed, thus reproducing ILBs **84i** and **84h** (i.e., C3 and D3). Thus, A1, A2 and C3 as main signals and B1, B2 and D3 as sub signals are reproduced, extended by the extension section, and sent through the synthesis section **101b** to the output section **110b**. The resultant signal is synchronized with a sub picture signal from a sub picture decoder **159** and an audio signal from an audio signal reproduction section **160** by the AV synchronization section **158**. Thus, these signals are output with matching timing. Accordingly, the progressive signal in the first stream and the progressive signal in the second stream are reproduced seamlessly with no disconnection. A method for synchronization for providing a seamless reproduction will be described later.

**[0252]** With reference to Figure **45**, a method for synchronizing two picture signals and an audio signal when two streams are simultaneously reproduced as in the case of, for example, a 3D picture or scope picture will be described. When three or four streams are simultaneously reproduced as in the case of a 720P signal, a similar method is usable and will not be described.

**[0253]** First, a method for synchronizing two streams according to the present invention will be described.

First, as shown in Figure **39**, a system reproduced from the optical disk is once accumulated in a track buffer **23** and then sent to a first video decoder **69d** and a second video decoder **69c**. In the track of the optical disk, a first stream A and a second stream of the progressive signal are alternately recorded on an interleave block-by-interleave block basis.

**[0254]** First, the stream A is reproduced at 2X rotation, and data accumulation in a first track buffer **23a** of the track buffer **23** is started. As shown in part (1) of Figure **45**, when  $t=t_1$  to  $t_2$ , data for 1 interleave block (ILB) I1 of the first video signal for 1 interleave time T1 is accumulated. A first track buffer data amount is increased, and becomes equal to 1 ILB at  $t=t_2$ . Thus, data accumulation for 1 ILB of the first video signal is completed. At  $t=t_2$ , after accumulation of data for 1 ILB of the first video signal corresponding to 1 GOP or more is completed, the second video signal (stream B) is reproduced from the optical disk starting from the interleave block I2. As shown in the solid line in part (4) of Figure **45**, data accumulation of the second video signal in a second track buffer **23b** is started at  $t=t_2$  and continued until  $t=t_6$ . From  $t=t_2$  through  $t_8$ , as shown in parts (7) and (10) of Figure **45**, the video presentation stamps (VPTS) of the first video signal and the second video signal are synchronized and respectively sent to the first video decoder **69c** and the second video decoder **69d** from the track buffer **23a** and the track buffer **23b**. As shown in parts(8) and (11) of Figure **45**, the input signals are output as two pieces of video data after being extended by the first and second video decoders **69c** and **69d**. The output of these pieces of data starts at  $t=t_3$ , which is delayed by a video delay time period  $t_{wd}$ , which is required for MPEG extension of the data. From  $t=t_4$  through  $t_{10}$ , the streams A and B are synthesized into a progressive signal by a progressive transform section **170**. Thus, a progressive signal for one interleave block is output.

**[0255]** As described above, from  $t=t_2$  through  $t_8$ , data for one interleave block is input to the decoders. Accordingly, the data in the first track buffer **23a** and the data in the second track buffer **23b** are consumed and reduced at substantially the same rate. Therefore, as shown in part (2) of Figure **45**, the data amount in the first track buffer is reduced from  $t=t_2$  through  $t_7$ . At  $t=t_7$ , the data amount is 1/2 of 1 ILB. Since data reproduction for the interleave block I5 starts at  $t=t_7$ , the data amount increases until  $t=t_8$ , when the data amount reaches 1 ILB. Since data input to the first decoder **69c** starts at  $t=t_8$  as at  $t=t_2$ , the data amount reduces until  $t=t_{11}$ . Finally, the buffer memory amount becomes 1/2 ILB.

**[0256]** With reference to part (4) of Figure **45**, a change in the memory amount in the second track buffer **23b** for stream B will be described. At  $t=t_2$ , input of data B1 for the interleave block I2 of stream B in the second track buffer **23b** starts. At the same time, transfer of data B1 to the second video decoder **69d** starts. Accordingly, the buffer amount at  $t=t_6$  is 1/2 ILB. When 2-angle re-

coding of a progressive signal according to the present invention is performed, it is necessary to perform a track jump to the interleave block I5 over the interleave blocks I3 and I4 since there are four streams, i.e., four interleave blocks. During the jump period 197 (tj), data input from the optical disk is interrupted. Thus, the buffer amount of the stream B is reduced until  $t=t_8$ , when the buffer amount is close to zero.

[0257] Since input of data B2 of the interleave block I6 starts at  $t=t_8$ , the buffer amount starts increasing again. At  $t=t_{11}$ , the memory amount of the second track buffer is 1/2 ILB. At  $t=t_{11}$ , a track jump to the interleave block I9 of A3 over the interleave blocks I7 and I8 is performed.

[0258] The above-described operation is repeated.

[0259] Now, the minimum necessary memory capacity for a track buffer 23 (total capacity of the first and second track buffers 23a and 23b) according to the system of the present invention will be checked. A track buffer capacity 198 indicated by dotted line in part (4) of Figure 45 shows the total data amount in the first and second track buffers 23a and 23b. A continuous reproduction is realized by setting the total capacity of a minimum 1 ILB in the track buffer.

[0260] According to the present invention, the total capacity of the track buffers 23a and 23b is set to be 1 interleave block or more for progressive reproduction. Thus, overflow and underflow of the track buffer are prevented. A method for switching the system clock STC between two streams will be described with reference to Figure 31. A progressive signal includes two streams A and B. Here, the streams of two interlace signals forming a 1 ILB progressive signal are referred to as A1 and B1. As shown in part (1) of Figure 31, data A1 for stream A is reproduced during the 1/2 ILB time period and all the data is recorded in the buffer. Then, as shown in part (2) of Figure 31, data for stream B is reproduced as B1 and stored in the buffer after A1 is reproduced. Since the data reproduced from the optical disk is restricted with stream B (part (2) of Figure 31) as described above, the track buffer does not overflow. Stream A (part (3) of Figure 31) or stream clock (SCR) from the track buffer for stream B is reset substantially in synchronization with the start J of the reproduction of stream B (part (2) of Figure 31). Since stream B is output at the speed of 2X, the stream clock is counted at the speed of 1X as shown in part (3) of Figure 31, i.e., at half the speed of stream B due to the buffer. At point G, the stream clock is reset. Time VPTS2 at which the video signal for stream B is output needs to be synchronized with time VPTS1 in consideration of the delay time period Tvd due to, for example, MPEG decoding time period. In this case, at point I ( $t=T_i$ ), when the VPTS stops rising, AV synchronization control is restarted. By checking VPTS2 of stream B and synchronizing VPTS1 of stream A to VPTS2, synchronization is realized by one-system simple control. VPTS1 can be used additionally.

[0261] Audio data of synchronizing stream B is repro-

duced and the system clock is switched at point H using APTS of stream B as shown in part (4) of Figure 31. Regarding a sub picture signal of stream B, the system clock can be switched in a similar manner.

[0262] By using data of stream B with priority, AV synchronization is realized with simple control.

[0263] All the data in streams A1 and A2 is stored in the buffer memory, the buffer memory does not overflow. Stream B1 may possibly overflow. However, according to the present invention, the synchronization control is performed using stream B and the system clock is switched to control the signal flow so that VPTS2 does not exceed the VPTS threshold level as shown in part (6) of Figure 31. Therefore, the buffer does not overflow.

[0264] According to the present invention, the audio signal of stream B is used for audio reproduction. Therefore, the buffer amount of audio decoder is reduced to 1/2. Furthermore, by the system clock is switched at point H ( $t=Th$ ) as shown in part (4) of Figure 31, the audio signal is reproduced smoothly without exceeding the APTS threshold level. The sub picture information is also reproduced with smooth synchronization. Accordingly, picture, audio and sub picture (subtitles or the like) signals are synchronized, and picture and audio are reproduced seamlessly. The audio signal and the sub picture signals of stream A can be omitted. In the embodiment where the audio and sub picture signals are put into stream B so that stream B2 is reproduced by an existing reproduction apparatus, and reproduction of stream A is controlled by the second video signal output control information provision section 179; a picture with no audio signal is prevented from being output. By omitting the audio and sub picture data of stream A, progressive picture software, for example, a 2-hour movie, can be recorded in one two-layer disk by the interleave block recording system according to the present invention. Such an effect will be described. In the case of a movie, data for about 2 hours and 15 minutes can be recorded on a one-layer 4.7 GB DVD. In order to perform 2-channel recording of a progressive picture without finding a differential, 9.4 GB is required. A picture signal requires 4 Mbps, and sub picture and audio signals require almost 1 Mbps. When the audio signal of 1 Mbps is recorded in one stream, a total of only 9 Mbps is sufficient. In other words, only 90% of the data amount, i.e., 8.5 GB (90% of 9.4 GB) is sufficient. Therefore, a two-layer disk accommodates the data for one layer and a progressive signal.

[0265] The synchronization method of the present invention functions as follows. Where an interleave block of stream A is recorded first and then an interleave block of stream B is recorded on the optical disk, when the first data (e.g., stream A) is stored in a track buffer and the next data (e.g., stream B) is reproduced, the synchronization information of stream B is mainly used. Specifically, the system clock is switched so that the video time stamp of stream B (VPTS2) does not exceed the threshold value of VPTS2. In this manner, video and

audio signals are reproduced in synchronization with each other with no disconnection. Stream A can be read from the buffer in synchronization with the time information such as VPTS2 (time stamp of stream B). Thus, the control is simple.

**[0266]** As described above, according to the present invention, the first stream is once accumulated in a buffer and only the second stream is processed with synchronization. Thus, the control is accurate and simple. Overflow and underflow can be prevented by setting the size of the buffer memory to be 1 ILB or more.

**[0267]** An existing DVD reproduction apparatus uses a 100 to 300 kB buffer memories, which is about 1/5 of the standard 1 ILB. According to the present invention, smooth reproduction is performed with the standard 1 ILB buffer memory. 1 ILB corresponds to 0.5 to 2 seconds. Since the wait time period in the case of multiple angle reproduction can be only about 1 second, 1 ILB is actually considered to correspond to 0.5 to 1 second. In order to handle an 8 Mbps stream corresponding to 1 second, a buffer memory of 1 MB or more is usable in the reproduction apparatus according to the present invention.

**[0268]** The synchronization control section 166 in Figure 30 can switch the system clock using the synchronization data regarding the interleave blocks I2 and I6 of the second video signal to realize seamless reproduction between interleave blocks. During data reproduction for interleave blocks I2 and I6, the motor rotation speed reproduction track is controlled while monitoring the buffer amount of stream B. Thus, the memory amounts of the track buffers 23a and 23b can be optimized so as not to overflow. All the data for the interleave blocks I2 and I6 of stream A is in the track buffer 23a and is not suitable to optimize the buffer size. When audio data of the interleave blocks I1 and I5 is used for reproduction, it is required to accumulate the one interleave block or more of audio data and sub picture data in the track buffer 23 (Figure 39) and the audio decoder buffer 172 (Figure 39) as shown in part (3) of Figure 45 in order to match the time stamp of the audio data with the time stamp of the video output of parts (8) and (11) of Figure 45. By contrast, when the audio data of the interleave blocks I2 and I6 is used, 1/2 ILB data is sufficient as shown in part (5) of Figure 45. Accordingly, the required memory amount of the track buffer 23 (Figure 39) and the audio decoder buffer 172 (Figure 39) is reduced to half.

**[0269]** As shown in Figure 45, for reproducing data of interleave blocks I1 and I2 including the main signal of a progressive signal and data of interleave blocks I5 and I6 including the interpolation of the progressive signal, the interleave blocks I5 and I6 can be stored in the buffer and then the motor rotation can be controlled based on the reproduction data regarding the interleave blocks I2 and I6. Thus, the memory amount of the buffer is reduced. The system clock of the AV synchronization control section 158 in Figure 30 can be switched based on

the system clock of the interleave blocks I2 and I6. Thus, stable decoding is realized without causing the buffer to overflow.

**[0270]** The method of skipping the first field of a VOB of a progressive signal is described with reference to Figure 37. A second practical method is carried out with the recording apparatus 99 shown in Figure 22. Among an Odd First identifier 199 obtained by interlace transform and an Even First identifier 200, only the Even First identifier 200 is transformed by an Even/Odd transform section 201 into an Odd First identifier 202 and provided to each piece of MPEG data. Thus, all the VOBs start with an Odd First identifier.

**[0271]** As shown in Figure 21, the reproduction apparatus reproduces the data regarding the Odd First identifier 199 and the data regarding the Odd First identifier 202 obtained from the Even First identifier. In step 203, it is checked whether or not a progressive signal is reproduced. If yes, in step 204, the Odd First identifier of the second video signal is transformed into an Even First identifier 200a and sent to the interlace transform section 71b of the MPEG decoder. If no, the identifier is not transformed. The interlace transform section 71b outputs the field of the frame picture of the second video signal first. Thus, an Even First picture is output. The synthesis section 90 synthesizes the Even First picture of the second video signal and the Odd First picture of the first video signal and outputs a normal progressive picture. By this method, all the interleave blocks start with an Odd First picture, and thus seamless multiple angles are reproduced with no problem by a DVD reproduction apparatus. Since each interleave block is restricted to start with an Odd First picture for seamless multiple angle reproduction, the dummy field need not be inserted. Thus, the recording efficiency is not reduced.

**[0272]** According to the second method of even/odd transform, the first video signal is normally reproduced even with an existing reproduction apparatus. However, when interlace transform is performed in accordance with the Odd First identifier of the second video signal by the existing reproduction apparatus, the odd field and the even field are inverted. Thus, a low quality picture with a lower resolution is output. In order to avoid this, when a conventional reproduction apparatus is used, information regarding the restriction on the reproduction of the second video signal by the DVD format is recorded on the optical disk 85 by the second video signal output restriction information provision section described with reference to Figure 40. Thus, the second video signal is not reproduced by the existing reproduction apparatus, and the situation where the user views unpleasant picture is avoided.

**[0273]** With the recording apparatus, an Odd First picture (field picture) and a transformed Odd First picture (field picture), both of which are field pictures, are compressed respectively by compression sections 81a and 81b by variable encoding. When motion detection and

compensation are performed separately, encoding of a picture which is difficult to compress results in separate block distortions. When such encoded signals are synthesized into a progressive signal, the decoded picture is deteriorated with noise. In order to avoid this, motion detection compensation is performed with an identical motion vector by one motion detection/compensation section **205** for encoding. Such processing matches the block distortion when the two fields are decoded. The matched block distortion is less conspicuous. Furthermore, the load for encoding is reduced.

**[0274]** Next, an operation of the AV synchronization section **158** will be described in detail.

**[0275]** The AV synchronization section is one of the most important sections of the present invention.

**[0276]** First, an operation of a system control section in Figure **5** will be described. The system control section **21** determines whether or not an optical disk has been set (inserted) in the reproduction apparatus. Once the optical disk is detected to be set, the system control section **21** controls a mechanism control section and a signal control section to control the disk rotation until stable reading is performed. When the stable reading is performed, the optical pickup is moved to read a volume information file shown in Figure **28**.

**[0277]** The system control section **21** further reproduces a program chain group for a volume menu in accordance with volume menu management information in the volume information file shown in Figure **28**. When the program chain group for the volume menu is reproduced, the user can designate data numbers of desired audio data and sub picture data. Reproduction of the program chain group for the volume menu during the reproduction of the data on the optical disk can be omitted when it is not necessary for the specific use of the multi-media data.

**[0278]** The system control section **21** reproduces and displays a program chain group for a title menu in accordance with title group management information in the volume information file. Thus, the system control section **21** reads the file management information of the video file including the title selected based on the user's selection and is directed to the program chain at the start of the title. The program chain group is reproduced.

**[0279]** Figure **29** is the flowchart showing a detailed process of reproduction of the program chain group performed by the system control section **21**. As shown in Figure **29**, in steps **235a**, **235b** and **235c**, the system control section **21** reads corresponding program chain information from the volume information file or a program chain information table of the video file. When the program chain is not completed in step **235d**, the processing advances to step **235e**.

**[0280]** In step **235e**, it is determined whether or not the current cell and the immediately previous cell should be connected seamlessly referring to seamless connection instruction information for the cell to be transferred next in the program chain information. If yes, the

processing goes to step **235f** for seamless connection processing. If no, ordinary connection is performed.

**[0281]** In step **235f**, the mechanism control section and the signal processing section, for example, are controlled to read DSI packets, so that VOB reproduction end time (VOB\_E\_PTM) in the DSI packet of the cell which has been transferred and VOB reproduction start time (VOB\_S\_PTM) in the DSI packet of the cell to be transferred next are read.

**[0282]** In step **235h**, "VOB reproduction end time (VOB\_E\_PTM) - VOB reproduction start time (VOB\_S\_PTM)" is found. The resultant value is sent to the STC offset synthesis section **164** in the AV synchronization control section **158** in Figure **30** as an STC offset value between the current cell and the immediately previous cell which has been transferred.

**[0283]** Simultaneously, in step **235i**, VOB reproduction end time (VOB\_E\_PTM) is transferred to an STC switch timing control section **166** as switching time T4 for an STC switch **162e**.

**[0284]** The system control section **21** then instructs the mechanism control section to continue reading data until the terminal position of the current cell. Thus, the data for the current cell is transferred to the track buffer **23** in step **235j**. Upon completion of the transfer, the program chain information is read in step **235c**.

**[0285]** If it is determined a seamless connection is not necessary in step **235e**, the data is transferred to the track buffer **23** until the end of the system stream, and then program chain information is read in step **235c**.

**[0286]** Hereinafter, two examples of a method for AV synchronization control for seamless connection and seamless reproduction will be described. In other words, the AV synchronization control section **158** shown in Figures **26** and **39** will be described in detail.

**[0287]** Referring to Figure **39**, a system decoder **161**, an audio decoder **160**, video decoders **69c** and **69d**, and a sub picture decoder **159** are all synchronized to a system time clock given by the AV synchronization control section in Figure **30** to process the data in the system stream.

**[0288]** Regarding a first method, the AV synchronization control section **158** will be described with reference to Figure **30**.

**[0289]** In Figure **30**, the AV synchronization control section includes STC switches **162a**, **162b**, **162c** and **162d**, an STC **163**, an STC offset synthesis section **164**, an STC setting section **165** and an STC switch timing control section **166**.

**[0290]** The STC switches **162a**, **162b**, **162c**, **162d** and **162e** switch between an output value of the STC **163** and an output value of the STC offset value synthesis section **164** as a reference clock to be provided to the system decoder **161**, the audio decoder **160**, the main video decoder **69c**, the sub video decoder **69d** and the sub picture decoder **159**, respectively.

**[0291]** The STC **163** is a reference clock of the entire MPEG decoder shown in Figure **39** in ordinary repro-

duction.

[0292] The STC offset synthesis section **164** continues outputting a value obtained by subtracting the STC offset value provided by the system control section from the value of the STC **163**.

[0293] The STC setting section **165** sets an STC initial value given by the system control section or an STC offset synthesis value given by the STC offset synthesis section **164** in the STC **163** at the timing given by the STC switch timing control section **166**.

[0294] The STC switch timing control section **166** controls the STC switches **162a** through **162e** and the STC setting section **165** based on STC switch timing information given by the system control section, the STC **163**, and the STC offset synthesis value given by the STC offset synthesis section **164**.

[0295] The STC offset value is an offset value used for changing the STC value when system stream #1 and system stream #2 having different STC initial values are continuously reproduced.

[0296] The STC offset value is specifically obtained by subtracting the "VOB reproduction start time (VOB\_S\_PTM)" described in the DSI of system stream #2 to be reproduced next from the "VOB reproduction end time (VOB\_E\_PTM)" described in the DSI of system stream #1 reproduced first. The information regarding the display of such a value is pre-calculated by reading data from the optical disk in Figure 5 by the system control section **167** when the data is input to the track buffer **23**.

[0297] The calculated offset value is supplied to the STC offset synthesis section **164** before the last pack of system stream #1 is input to the system decoder **161**.

[0298] Except for seamless connection control, the data decoding processing section **165** in Figure 5 operates as an MPEG decoder. The STC offset value given by the system control section **21** is 0 or an arbitrary value. The STC switches **162a** through **162e** always is selected to be connected to the STC **163**.

[0299] With reference to Figure 38, switching of the STC switches **162a** through **162e** in the connection part of the system control section and an operation of the STC **163** when two system streams having non-continuous STC values, such as system streams #1 and #2, are continuously input to the system decoder **161** will be described.

[0300] The SCR, APTS, VPTS and VDTS of the system streams #1 and #2 to be input will not be described.

[0301] In the STC **163**, an initial STC value corresponding to system stream #1 which is being reproduced is set by the STC setting section **165**, and the value is sequentially counted up in accordance with the reproduction. The system control section **167** (Figure 5) calculates the STC offset value by the above-described method and sets this value in the STC offset synthesis section **164** before the last pack of system stream #1 is input to the decoder buffer. The STC offset synthesis section **164** continues outputting a value obtained by

subtracting the STC offset value from the value of the STC offset **163**.

[0302] The STC switch timing control section **166** obtains time T1, at which the last pack of system stream #1 reproduced first is input to the decoder buffer, and switches the STC switch **162a** to the output side of the STC offset synthesis section **164** at time T1 (step **168b**).

[0303] Thereafter, the STC value referred to by the system decoder **161** is provided with an output from the STC offset synthesis section **164**. The transfer timing of system stream #2 to the system decoder **161** is determined by the SCR described in the pack header of system stream #2.

[0304] Next, the STC switch timing section **166** obtains time T2, at which the reproduction of the last audio frame of system stream #2 is terminated, and switches the STC switch **162b** to the output side of the STC offset synthesis section **164** at time T2 (step **168c**) at time T2. A method for obtaining time T2 will be described later.

[0305] Thereafter, the STC value referred to by the audio decoder **160** is provided with an output from the STC offset synthesis section **164**. The output timing of system stream #2 is determined by the APTS described in the audio packet of system stream #2.

[0306] Next, the STC switch timing section **166** obtains time T3 and T3', at which the decoding of the last video frame of the main signal and the sub signal of system stream #1 reproduced first is terminated, and switches the STC switches **162c** and **162d** to the output side of the STC offset synthesis section **164** at time T3 and T3' (step **168d**). A method for obtaining time T3 will be described later. Thereafter, the STC value referred to by the video decoders **69c** and **69d** is provided with an output from the STC offset synthesis section **164**. The video decoding timing of system stream #2 is determined by the VPTS described in the video packet of system stream #2. Next, the STC switch timing section **166** obtains time T4, at which the reproduction output of the last video frame of system stream #1 reproduced first is terminated, and switches the STC switch **162e** to the output side of the STC offset synthesis section **164** at time T4 (step **168e**). A method for obtaining time T4 will be described later.

[0307] Thereafter, the STC value referred to by the video output switch **169** and the sub picture decoder **159** is provided with an output from the STC offset synthesis section **164**. The video output timing and sub picture output timing of system stream #2 are determined by the VPTS and SPTS described in the video packet and the sub picture packet of system stream #2.

[0308] When switching of the STC switches **162a** through **162e** is completed, the STC setting section **165** sets the value given by the STC offset synthesis section **164** in the STC **163** (step **168f**) (referred to as "reloading of the STC **163**") and switches all the switches **162a** through **162e** to be connected to the STC **163** (step **168g**).

[0309] Thereafter, the STC value referred to by the

audio decoder **160**, the video decoders **69c** and **69d**, the video output switch **169** and the sub picture decoder **159** is provided with an output from the STC **163**, and the operation returns to the ordinary operation.

[0310] Now, two means for obtaining time T1 through T4 for switching the STC will be described.

[0311] According to first means, information representing time T1 through T4, which can be easily calculated when the streams are created, is recorded on the disk. The system control section **21** reads the information and sends the information to the STC switch timing control section **166**.

[0312] Especially as T4, "VOB reproduction end time (VOB\_E\_PTM)" described in the DSI is used as it is.

[0313] On the disk, the value obtained based on the STC value used in system stream #1 reproduced first is described, and the STC switch timing control section **166** switches the STC switches **162a** through **162e** at the moment the value of the STC **163** becomes time T1 through T4.

[0314] According to second means, based on the timing when the leading data of system stream #1 is written in the track buffer **23**, the video decoder buffers **171** and **171a**, and the audio decoder buffer **172**, the time for reading the leading data is obtained.

[0315] Assuming that the track buffer **23** is a ring buffer including a writing pointer, a reading pointer and a data memory, the system control section **21** specifically reads an address indicated by the writing pointer and an address indicated by the reading pointer. Based on an address indicated by the writing pointer and an address indicated by the reading pointer when a target pack is written, the system control section **21** detects the moment when the pack written immediately before is read.

[0316] When reproduction of system stream #1 is completed and reproduction of system stream #2 is started, the system control section **21** indicates the leading address of system stream #2 on the optical disk for reading. Accordingly, the system control section **21** learns the moment when the leading data of system stream #2 is stored in the track buffer **23**. Next, time T1 is obtained by marking the address where the leading pack of system stream #2 is written and setting the moment when reading of the immediately previous pack is completed as T1.

[0317] The moment T1 is obtained, the system control section **21** informs T1 to the video decoders **69c** and **69d** and the audio decoder **160**. Thus, the video decoders **69c** and **69d** and the audio decoder **160** learn that the leading packet of system stream #2 will be transferred to the video buffer **171** and the audio buffer **172** thereafter.

[0318] Accordingly, the two video decoders **69c** and **69d** and the audio decoder **160** learn the moment when the last packet of system stream #1 is transferred and obtain T2 and T3 by managing each decoder buffer in the same manner as the buffer management of the track

buffer **23**.

[0319] In the case where T1 is detected, all the data has been read from the video decoder buffer **171** or audio decoder buffer **172** (immediately after the last frame of system stream #1 is decoded), and no data to be written has arrived (when the transfer time period between packs is empty), there is no data to be written. Thus, address management is impossible. Even in this case, the packet of the frame to be decoded next before then next decoding timing (decoding timing of the leading frame of system stream #2) is transferred without fail. Accordingly, the switch timing is learned by setting the moment of transfer of the packet as T2 or T3.

[0320] Regarding T4, as described above, "display end time of last frame of the video of system stream #1 (VOB\_E\_PTM)" can be used as it is.

[0321] Next, a second method for seamless reproduction will be described.

[0322] Figure **31** shows at which timing the system stream is reproduced and output after being input to the data decoding processing section in Figure **38**, passed through the decoder buffer and decoded. With reference to Figure **31**, a change in each of APTS and VPTS values at the connection point of system streams #1 and #2 will be described, and a method for AV synchronization control at the seamless connection area during the actual stream processing will be described.

[0323] Then, with reference to the graph in Figure **31**, a method for performing seamless connection control in accordance with the process represented by the flow-chart in Figure **43** will be described.

[0324] The starting timing of the seamless connection control is as shown in part (3) of Figure **31** regarding SCR. While the SCR value in the graph is increasing, system stream #1 is transferred from the track buffer **23** (Figure **5**) to the data decoding processing section **16** (Figure **5**). Only at point G when the transfer of system stream #1 is completed and transfer of system stream #2 is started, the SCR value is "0". Accordingly, it is found that new system stream #2 is input to the data decoding processing section **16** by finding point G at which the SCR value is "0". At this point (time Tg), the synchronization mechanism control section can turn off (release) the AV synchronization mechanism of the reproduction output section.

[0325] It can be detected that the SCR value is "0" after the signal read from the optical disk is processed or written into the track buffer **23**. The AV synchronization mechanism can be turned off based on the detection at this point.

[0326] In order to determine the timing at which AV synchronization mechanism once turned off should be turned on (started) again, it is necessary to know that both the audio output and the video output included in system stream #1 have changed to the audio output and the video output of new system stream #2 to prevent inconsistent reproduction by which the audio and video signals do not match. The moment the audio output of

the previous system stream is changed to the audio output, new system stream #2 can be found by detecting point H at which the APTS value stops increasing. The moment the video output of the previous system stream is changed to the video output, new system stream #2 can be found by detecting point I at which the VPTS value stops increasing. Accordingly, the synchronization mechanism control section can restart the AV synchronization at time  $T_i$ , i.e., immediately after finding that point H and point I both appear.

**[0327]** When the SCR value is not set in the SCR or the APTS value and VPTS value are directly compared with each other during the period from time  $T_g$  to time  $T_i$ , the period in which the AV synchronization mechanism is off can be further shortened.

**[0328]** In order to realize this, both the APTS value of the audio output data and the VPTS value of the video output data from the data decoding processing section 16 are monitored, and the value which becomes lower first is detected. At this point, i.e., time  $T_h$  in Figure 31, the AV synchronization mechanism is turned off.

**[0329]** As is apparent, in order to perform the timing determination based on whether the APTS and VPTS values continue increasing, the APTS and VPTS values need to be reduced at the point where the system streams are connected. In other words, the last APTS and VPTS values in the system stream need to be larger than the maximum initial values of APTS and VPTS in the system stream.

**[0330]** The initial APTS and VPTS values ( $\Delta T_{ad}$ ,  $\Delta T_{vd}$  in the figure) are determined as follows.

**[0331]** The initial APTS and VPTS values are each a sum of the time period in which video data or audio data is stored in the video buffer or audio buffer and the re-order of the video (in MPEG pictures, the decoding order and the display order of the pictures do not necessarily match, and display can be delayed by one picture at the maximum with respect to the decoding). Accordingly, the sum of the time period required for the video buffer or audio buffer to become full and the display delay (one frame) is the maximum initial value of APTS or VPTS.

**[0332]** The system stream can be created so that the last APTS and VPTS values in the system stream exceed such values.

**[0333]** In this example, the timing for turning on the AV synchronization mechanism after the system streams are connected has been described to be determined based on whether or not the APTS and VPTS values increase. The timing for turning on the AV synchronization mechanism can be determined using the threshold value as described below. First, audio and video threshold values shown in parts (4) and (5) of Figure 31 are determined by the reproduction apparatus. These values equal to the maximum initial values of APTS and VPTS described above.

**[0334]** The timing is determined based on whether or not the APTS and VPTS values read by the APTS reading means and VPTS reading means are respectively

below the audio threshold value and video threshold value. When the APTS and VPTS values are larger than the audio and video threshold values, data has not been changed to the data of the new system stream. When the APTS and VPTS values are equal to or smaller than the audio and video threshold values, data output of the new system stream has been started. Thus, the timing for turning on and off the AV synchronization mechanism may be found.

**[0335]** The above-described on/off control of the AV synchronization mechanism provides seamless reproduction which is not disturbed at the connection area of the system streams.

(Calculation of the synthesis section)

**[0336]** Figure 98 illustrates in detail the calculation of the synthesis section of the reproduction apparatus shown in Figure 21 and the division calculation of the recording apparatus shown in Figure 23.

**[0337]** Part (a) of Figure 98 illustrates Figure 23 in detail. Regarding the 525P or other progressive signal, a  $q$ 'th line data 283 represented by A and a  $(q+1)$ 'th line data 284 represented by B are subjected to the calculation of  $(A+B)\div 2$  by a first division calculation section 141 of a division calculation section 285, thereby obtaining a low frequency component M, which is set as the  $q$ 'th line data of the first stream. In the case of an interlace signal, lines 1, 3 and 5 are created in the  $p$ 'th field. In the  $(P+1)$ 'th field, the  $(q+1)$ 'th line data, i.e., lines 2, 4 and 6 are calculated on a line-by-line basis. The resultant interlace signal is encoded by a first encoder 82a.

**[0338]** A second division calculation section 143 performs the calculation of  $A-B$ . The DVD format and the like do not define a negative value. In order to realize compatibility with the conventional formats,  $(A-B)\div 2$  is added to a constant 257 so that a negative value is not obtained. In the case of 8-bit data, 128 is added as the constant 277. As a result of the calculation, an interlace signal is created as the  $q$ 'th line data 280 (S). The interlace signal is encoded by a second encoder 28b and recorded on the disk by the MADM interleave system.

**[0339]** With reference to part (b) of Figure 98, a calculation of the synthesis section of the reproduction apparatus shown in Figure 21 will be described in detail. As shown in part (a) of Figure 98, the data multiplexed by the MADM system according to the present invention and recorded on the disk 85 is divided into a first stream and a second stream, and processed with decoders 88a and 88b to obtain two video signals. This signal is an interlace signal and a top line first signal (hereinafter, referred to as "TF") in which the top line is an odd line. In the synthesis section 90, the calculation of  $(2M+2S-\text{constant})\div 2$  is performed by the first calculation section 250, where M is the  $q$ 'th line data of the master signal and S is the  $q$ 'th line data of the sub signal. As a result,  $(A+B+A-B+256-256)\div 2=A$ . The  $q$ 'th line data (A) is obtained and is output as  $r$ 'th line data 281 (output picture).



[0340] As shown in part (a) of Figure 98, the constant 277 is added by the second calculation section 143. Accordingly, the original data is obtained by subtracting the twice the value of the value (128) obtained by synthesis, i.e., 256. Due to the compatibility, a conventional decoder in which negative values are not defined can be used.

[0341] Then, the calculation of  $(2M-2S+(2 \times \text{constant}))$  is performed by a second calculation section 251. As a result,  $(A+B-A-B-256-256) \div 2 = B$ . The  $(q+1)$ th line data 284 is obtained and output as  $(r+1)$ th line data 282.

[0342] Thus, two interlace signals are synthesized, and a progressive video signal having 480 lines (1st through 480th lines) is output.

[0343] The system shown in Figures 98, 21 and 23 has a feature that division and synthesis can be conducted with only one adder and one subtractor for 8-bit data and 10-bit data and thus the circuit structure is simplified. Thus, a high resolution picture with progressive and wide video signals are obtained with no significant cost increase.

[0344] Since a negative value is reproduced simply by adding the constants 278a and 278b to the A-B signal, the conventional decoders 279 and 280 which cannot handle negative values are usable.

[0345] As shown in part (a) of Figure 98, in both the first stream and the second stream, the first line of the first field is an odd line (Top Line First; TF). According to an encoder of the DVD format, fields are dropped unless the streams are Top Line First streams. Since each stream is a Top Line First stream according to the system of the present invention, fields are not dropped.

[0346] Figure 96 shows an overall operation of the reproduction apparatus shown in part (b) of Figure 98. A reproduction signal is divided by a division section 87 in units of nGOP into a first stream and a second stream. The first and second streams are decoded by first and second decoders 88a and 88b into two Top Line First (TF) streams. A Top Line First signal 244 and a Bottom Line First signal 245 are created by the first calculation section 250 and the second calculation section 251. Then, an analog signal such as 525P is output by a DA conversion section 266.

[0347] In Figure 96, two field pictures having the same time stamp are synthesized in a vertical direction. By synthesizing the pictures in a horizontal direction according to the present invention, the horizontal resolution can be doubled. Figures 58, 59 and 60 show a recording apparatus, and Figure 20 shows a reproduction apparatus including a wide picture synthesis section 173. With reference to Figures 91 and 92, the principle of the division section of the recording apparatus and the principle of the wide picture synthesis section 173 of the reproduction apparatus will be described in detail.

[0348] Figure 91 shows a method for dividing a luminance signal and a color signal in the left half. Luminance signals Y0 and Y1 of input pixel signals 287a and 287b having a 1440 pixels in the horizontal direction are subjected to addition and subtraction respectively by a

first division calculation section 141a and a second division calculation section 141b shown in Figures 91 and 92 of the division calculation section 285 in Figure 98. Thus, a luminance signal of  $(Y0+Y1)/2$  of the first stream and a luminance signal of  $(Y0-Y1)/2$  of the second stream are generated. The input signal having 1440 pixels in the horizontal direction is divided into two video signals each having 720 pixels in the horizontal direction. The first stream is passed through a horizontal filter and thus deprived of a high frequency component. Accordingly, even when only the first stream is output on the screen by the conventional apparatus, aliasing distortion does not occur. Thus, compatibility with the conventional apparatus is obtained. Figure 92 shows processing of a color signal. An input pixel signal 287a and an input pixel signal 287c with one input pixel signal interposed therebetween are used. From a signal Cb0 of input pixel signal 287a and a signal Cb2 of the input pixel signal 287c, a sum signal  $(Cb0+Cb2)/2$  is obtained and set as a division pixel signal 290a of the first stream. A difference signal  $(Cb0-Cb2)/2$  is set as a division pixel signal 291a of the second stream. In a similar manner,  $(Cr0+Cr2)/2$  and  $(Cr0-Cr2)/2$  are obtained from input pixel signals 287b and 287d. From these signals, division pixel signals 290b and 291b of the first and second streams are obtained. Thus, a high resolution signal having 1440 pixel in the horizontal direction is divided into two NTSC-grade digital video signals of the CCIR601 and SMPTE295M formats.

[0349] Next, the processing of the synthesis section 173 of the reproduction apparatus briefly described with reference to Figure 20 will be described in detail. In the synthesis section 90 in Figure 91, division pixel signals 288b and 289b of the first and second streams are added together by the first calculation section 250 by the calculation of  $(Y6+Y7)/2+(X-Y+256)/2-128=Y6$ . Thus, the input pixel 287g is obtained. Next, the difference calculation of  $(Y6+Y7)/2+(X6-Y7+256)/2+128=Y7$  is performed. Thus, the luminance signal of the input pixel 287h is obtained. In this manner, a high resolution signal having 1440 pixels in the horizontal direction is obtained from two signals each having 720 pixels in the horizontal direction by a sum calculation and a difference calculation.

[0350] Next, synthesis calculation of color signals will be described with reference to Figure 92. In the case of the Cr signal, the division pixel signals 290d and 291d of the first and second streams are subjected to sum calculation by the first calculation section 250 and difference calculation by the second calculation section 251. Specifically, the calculations of  $(Cr4+Cr6)/2+(Cr4-Cr6+256)/2-128=Cr4$  and  $(Cr4+Cr6)/2-(Cr4-Cr6+256)/2+128=Cr6$  are performed. Cr4 and Cr6 are obtained and assigned to input pixel signals 287f and 287h.

[0351] Regarding the Cb signals, similar calculations are conducted on the division pixel signals 290c and 291c. Cr4 and Cr6 are obtained and assigned to input pixel signals 287e and 287g. Thus, the luminance sig-

nals and color signals of the input signal are completely synthesized to obtain a high resolution signal having 1440 pixel in the horizontal direction.

**[0352]** By the 2X reproduction apparatus, an interlace signal having 1440 pixels in the horizontal direction is obtained. By the reproduction apparatus shown in Figure 62, 3-2 transform is performed. In the case where a 24-frames/sec. signal of a movie or the like is recorded, the 24-frames/sec. signal is output a plurality of times by the frame memory by the 3-2 transform section 174. Thus, a 60-frames/sec. progressive video signal is obtained. By doubling the horizontal resolution to 1440 pixels, a wide 525P picture is obtained. Thus, a 1440×480P progressive picture is output.

**[0353]** Thus, by combining the 3-2 transform section 174 and the wide picture synthesis section 173, a 1440×480P high resolution progressive picture is output from a 24P picture such as a movie even by the 2X reproduction apparatus. When such a picture is reproduced by an existing DVD player, only the sum signal of the first stream is reproduced, but horizontal interlace interference does not occur since the picture is horizontally filtered.

**[0354]** With reference to Figure 97, an operation of reproducing data on an MADM disk will be described. On the MADM disk, a 60-frames/sec. progressive picture is divided into two frames, i.e., an odd frame 294 and an even frame 295. The operation of the division section 87 and the decoding section 88 is the same as described with reference to Figure 96 and will not be described. In the time direction synthesis section 296, a first field 297a and a second field 297b of the first stream are synthesized into a first odd frame 294a. A first field 298a and a second field 298b of the second stream are synthesized into a first even frame 295a. These frames are synthesized in the time direction in the order of the first odd frame 294a, the first even frame 295a, the first odd frame 294b, and the second even frame 295b every 1/60 second. Thus, a 60-frames/sec. progressive picture is reproduced. By the existing 1X reproduction apparatus, only the first stream is reproduced; i.e., a 525P interlace signal is reproduced and the compatibility is realized. However, the motion is slightly unnatural since the picture is a 30-frames/sec. picture. This system is an MADM system for recording two 30-frames/sec. streams and has the effect of a high encoding efficiency of the MPEG encoder due to the progressive picture.

(Optimization of buffer amount)

**[0355]** Regarding the total capacity of the track buffer circuit 23 in Figure 5, it was described that data for at least one interleave block needs to be accommodated in the track buffer circuit 23 in order to reproduce two streams simultaneously as shown in Figure 45. With reference to Figure 87, a buffer amount required for the MADM system reproduction according to the present invention will be calculated. As the capacity of one inter-

leave block, the values in Figure 87 are obtained by calculation. Figure 87 shows interleave unit lengths required for 5000-sector and 10000-sector track jumps with respect to each of transfer rates. The maximum transfer rate is 8 Mbps, and the maximum jump length is 10000 sectors. With the minimum of 551 sectors as the interleave unit length, a stable track jump is realized for switching to an interleave unit of another stream even by a 1X drive. In actuality, a drive of more than 1X is used, and thus the length of 551 sectors is not necessary. In consideration of the worst case, the disk manufacturers record an interleave unit of 551 or more sectors for an 8 Mbps stream. Accordingly, a buffer memory for one interleave unit is required by the MADM system according to the present invention as shown in Figure 45. Stable simultaneous reproduction of two streams is realized by setting a buffer memory of 551 sectors or more and 1102 bytes or more.

(Switching between two pieces of reproduction information)

**[0356]** Figures 93, 94 and 95 illustrate a system for maintaining the compatibility by reproducing the same disk by a conventional apparatus and an apparatus according to the present invention.

**[0357]** Figure 95 shows an operation of the conventional apparatus for reproducing an MADM system disk according to the present invention in part (a), and shows an operation of an MADM system apparatus for reproducing the MADM system disk in part (b).

**[0358]** An optical disk 1a includes a plurality of (four in the figure) streams recorded in a divided manner. Accordingly, four interleave units 84a, 84b, 84c and 84d having the same information on an n time period are recorded on the optical disk 1a in an order. Also on the optical disk 1a, a second reproduction information identifier 302 is recorded. The second reproduction information identifier 301 indicates that first reproduction information 300 for reproducing streams 1 and 3 and second reproduction information 301 for reproducing streams 2 and 4 are recorded on the optical disk 1a.

**[0359]** As shown in part (c) of Figure 95, the first reproduction information 300, 300a and 300c has only leading address information regarding the interleave blocks 84a and 84c corresponding to streams 1 and 3, i.e., a pointer. The second reproduction information identifier 302 is not reproduced by an existing reproduction apparatus which does not consider reproduction of MADM data. Thus, the second reproduction information identifier 301 cannot be read or utilized effectively. Accordingly, the conventional apparatus operates as if only streams 1 and 3 are recorded. Streams 2 and 4 are not reproduced at all. A conventional reproduction apparatus reproduces, for example, only the left-eye information from an optical disk having a 3D signal recorded in an MADM system. When 3D display is not conducted, display of a meaningless right-eye picture is prevented.

**[0360]** In the case of an optical disk having a high definition picture recorded in an MADM system, streams 1 and 3 have basic components, for example, NTSC. Streams 2 and 4 have a differential signal, i.e., colorless line-drawing. Since streams 2 and 4 are not reproduced by the conventional apparatus, it is prevented that the user views such an unpleasant picture. When such an MADM disk is reproduced by a conventional reproduction apparatus, a normal picture of streams 1 and 3 is reproduced but an abnormal picture of streams 2 and 4 is not reproduced. Accordingly, complete compatibility is realized. This operation will be described with a flowchart. As shown in Figure 93, in step 303a, an MADM disk having m streams is reproduced. First reproduction information 300a has pointer information on streams 1 and 3, i.e., the leading address of the interleave unit 84e to be jumped to next. The address information is used to conduct a track jump over a plurality of tracks as shown in Figure 3 to access the leading address of the interleave block 84e. The interleave block 84e is the first block among the subsequent blocks in stream 1 having time information. Thus, data in stream 1 is continuously reproduced.

**[0361]** When an instruction to switch the stream is issued in step 303b, whether there is an identifier showing the existence of a PCI table is present or not is checked in step 303c. A DVD has a PCI identifier (non-seamless) showing the existence of the second reproduction information 301. An MADM disk has a DSI identifier (seamless) showing the existence of the first reproduction information is recorded in lieu of the PCI identifier. When the disk is an MADM disk, the processing advances to step 303d to utilize the DSI table having the first reproduction information. The first reproduction information has pointer information on only streams 1 and 3 in step 303e. Therefore, in step 303f, a track jump is conducted based on the pointer information on streams 1 and 3 to maintain the continuous reproduction mode of stream 1. Alternatively, stream 1 is switched to stream 3, and reproduction is conducted continuously in terms of time but while skipping from data to data. As shown in step 303g, an ordinary NTSC picture of streams 1 and 3 is reproduced, but an unpleasant, unnecessary picture of streams 2 and 4 is not output. Thus, complete compatibility is realized.

**[0362]** A process for simultaneously reproducing two streams out of streams 1, 2, 3 and 4 by the MADM reproduction apparatus will be described with reference to Figures 94 and 95. As shown by second reproduction information 301, 301a, 301b, 301c and 301d in part (b) of Figure 95, the interleave unit 84a has leading address information of the interleave unit 84e, which is the next time information of streams 1, 2, 3 and 4. Since a physical addresses of a sector of an arbitrary interleave unit 84e, 84f, 84g or 84h is found, a track jump is easily conducted. The reason is that the MADM reproduction apparatus reproduces the second reproduction information identifier 302, learns the existence of the second

reproduction information, and utilizes the second reproduction information 301.

**[0363]** Thus, simultaneous reproduction of streams 1 and 2 or streams 3 and 4 is performed, and reproduction of a 3D or high resolution signal from an MADM disk is realized. The second reproduction information identifier 302 only needs to distinguish a conventional disk from an MADM disk, and can be even 1-bit data. An MADM identifier indicating the existence of a high resolution signal or 3D signal can be used.

**[0364]** This operation will be described with reference to the flowchart in Figure 94. In step 304a, an MADM disk is reproduced. In step 304b, it is checked whether there is a second reproduction information identifier 302 or not, or whether there is an MADM high resolution/3D identifier or not. If no, the disk is determined to be a conventional disk and the processing goes to step 304h. If yes, the processing goes to step 304c to check for the identifier of the interleave unit 84. If there is an identifier showing the existence of the second reproduction information, or if there is a seamless identifier in the case of the DVD, the seamless identifier is interpreted as a non-seamless identifier. The second reproduction information, which is not actually valid, is regarded as being valid in step 304d. In step 304e, link information on steps 1, 2, 3 and 4 is extracted from the second reproduction information.

**[0365]** In step 304f, first reproduction information, or a main stream which is switchable from the DSI table in the case of the DVD, is detected. In the example shown in Figure 95, streams 1 and 3 are found to be main streams. The first reproduction information includes main stream information, and the second reproduction information includes main and sub stream information. Accordingly, the main and sub streams can be distinguished based on the first and second reproduction information. In the case of Figure 95, the number of stream groups (angles) is found to be 2 by checking the second reproduction information.

**[0366]** When an instruction to switch the stream (angles) is issued in step 304g, a switch from stream 1 to stream 3 is conducted in step 304m. For this, simultaneous reproduction mode (A) for streams 1 and 2 using pointer information on streams 1 and 2 of the second reproduction information is switched to simultaneous reproduction mode (B) for streams 3 and 4. In other words, stepping access to the interleave units 84a, 84b, 84e and 84f is switched to stepping access to the interleave units 84c, 84d and 84g. Thus, two-stream groups can be switched in units of two streams.

**[0367]** Returning to step 304h, when a seamless identifier indicating the second reproduction information is invalid is recorded on the disk, the conventional apparatus regards the second reproduction information (PCI) as being invalid in step 304j. Thus, only streams 1 and 3 are reproduced using only the first reproduction information (DSI) in step 304k.

**[0368]** As described above, by detecting either the

conventional or the MADM identifier, the second reproduction information which is not valid in accordance with the conventional rule is regarded as being valid. Accordingly, a meaningless or unpleasant picture is not output from the MADM disk even by a conventional apparatus. Thus, the compatibility is improved.

(2-screen simultaneous reproduction)

[0369] With reference to Figure 90, an operation of the 2-screen synthesis section 28 described with reference to Figure 5 will be described in detail. Although n pieces of screens are used, the representation of 2-screen is used in this specification. To the n-screen synthesis section 28b in Figure 90, a first picture (A) and a second picture (B) of the first stream, a first sub picture and a second sub picture are input. In a simple structure, a line memory 28c is included. In this case, line-synthesis of the first picture (A) 28p and the second picture (B) 28q results in a picture of mode 1L having two screens side by side is obtained. Audio signals (A) and (B) of the first and second streams are synthesized by an audio mixer 28f. In the case of mode 1L, only the audio signal (A) is output. In mode 2L, a first sub picture of the first stream is synthesized on the screen. Only one sub picture 28r such as subtitles is selected and displayed by the n-screen synthesis section 28b. This has an effect of enlarging the display. In mode 2L, a second audio signal B is output after mixing to the speaker to the right of the screen. Thus, the second audio signal 28s of the second picture B can be listened to at a low volume.

[0370] As a higher structure, a frame memory 28d can be used. In this case, zooming of two screens is realized. A zoom signal generation section 28e which has received a zoom instruction signal 28p sends a ratio change signal to the n-screen synthesis section 28b and the audio mixer 28f. When the first picture (A) is enlarged as shown in the 2-screen picture 28i in mode 1, the first audio signal is used. In an opposite case, the second audio signal is output as in the 2-screen picture 28j. Thus, by changing the ratio of the video signals and audio signals of the first and second streams, video and audio can be matched. Pictures of streams 3 through 6 can be displayed in a divided manner as shown in a 2-screen picture 28m.

[0371] As described above, in the embodiment where two streams are simultaneously reproduced to output two video signals, and the synthesis of video signals and synthesis of audio signals are performed using the 2-screen synthesis sections 28 and 28b and the audio mixer 28f, two streams, for example, pictures taken by two cameras can be viewed simultaneously.

(Alteration of the filter)

[0372] According to the present invention, a video signal is divided into a low frequency component and a high frequency component by a picture division section 141a

shown in, for example, Figure 22. The division filter can be represented as in Figure 46. In Figure 22, division calculation of the first stream is conducted by calculation parameters of  $m_1=0$ ,  $m_2=1/2$ ,  $m_3=1/2$ , and  $m_4=0$ . Division calculation of the second stream is conducted by calculation parameters of  $m_1=0$ ,  $m_2=1/2$ ,  $m_3=-1/2$ , and  $m_4=0$ . Under these conditions, a 525P progressive signal is divided into a low frequency component and a high frequency component at the vertical resolution of 250.

[0373] The dividing frequency of the border can be altered by changing the calculation parameters of  $m_1$ ,  $m_2$ ,  $m_3$  and  $m_4$ . As shown in Figure 50, the dividing frequency can be changed from 200, to 250 and to 300, and each filter identifier 144 can be recorded on the optical disk. Thus, the filter identifier 144 is detected by a filter identifier reproduction section 305 of the reproduction apparatus in Figure 96 during data reproduction, and the set values of calculation parameters of  $n_1$ ,  $n_2$ ,  $n_3$  and  $n_4$  of the calculation section 212a are changed by a calculation parameter output section 306 in accordance with the filter identifier in Figure 50. The calculation section 212a of the synthesis section 90 performs calculation by the set values and processes vertical lines  $n-1$ ,  $n$ ,  $n+1$  and  $n+2$  based on the calculation parameters 196 of  $n_1$ ,  $n_2$ ,  $n_3$  and  $n_4$ , thereby obtaining the n-line signal. This processing can be actually performed in the first calculation section 250 and the second calculation section 251.

[0374] By changing the dividing frequency of the picture division filter, the distribution of the data amount between the first and second streams can be changed. In the case of the DVD format, the first and second streams each have a maximum capacity of 8 Mbps. When the dividing frequency is fixed, a picture having a high ratio of high frequency component causes the second stream data to overflow, resulting in collapse of MPEG encoding signal in the high frequency range. A picture having a high ratio of low frequency component causes the first stream data to overflow, resulting in collapse of encoding to significantly deteriorating the picture quality. In the case where the dividing frequency is variable, when the high frequency component is excessive, the dividing frequency in Figure 50 can be increased to 300. Thus, the second stream data amount is reduced and the first stream data amount is increased. Thus, the distribution of the data is optimized, so that the collapse of encoding is avoided.

[0375] When the low frequency component is excessive, the dividing frequency can be decreased to 200. Thus, the first stream data amount is reduced, which avoids collapse. Collapse is usually avoided this way, and the variable dividing frequency is effective. By changing the border of the division filter in accordance with the condition of the picture, collapse of encoding of one of the streams can be avoided. Accordingly, a satisfactory video signal is obtained. In other words, the overflow of the first or second stream is avoided by changing the division point, so that recording and repro-

duction are performed with the data amount being distributed in a satisfactory manner.

(Scanning line transform)

**[0376]** An operation of a scanning line transform section **29a** described with reference to Figure 5 will be specifically described. An MADM disk includes both an area having a high resolution signal such as a progressive signal and an area having a standard resolution signal such as an NTSC signal. The two streams are reproduced simultaneously and independently. The output is changed from progressive to NTSC or from NTSC to progressive. When a signal is output from the output section **29b** with no processing at the point of change, the scanning frequency is changed from 31.5 kHz to 15.7 kHz. Therefore, the deflection frequency of the TV **29c** is switched, thus disturbing the picture for a few seconds. Even in a TV having a built-in line doubler, the picture is disturbed when a progressive picture is switched to an NTSC picture. According to the present invention, this is avoided by automatically switching the progressive signal by the output section **29b**. In more detail, the NTSC picture of the first stream is scanned at 2X by the scanning transform section **29a** using an MADM disk identifier **10h** recorded on the MADM disk **1** or the progressive signal is output as it is. Since the high resolution area for reproducing two streams is switched to an ordinary resolution area for reproducing one stream, the output signal is immediately changed. Therefore, a progressive signal is continuously input to the TV **29c**. This system eliminates disturbance from the TV picture.

(Stream switching prohibiting flag)

**[0377]** As a method for preventing a differential signal of a high resolution signal from being output in an existing apparatus, a method for recording a stream switching prohibiting flag will be described.

**[0378]** As shown in Figure 86, in step **307a**, a stream switching prohibiting flag **309** is recorded on a disk **1c**. In step **307b**, stream 1 is set as the initial stream value in the management information.

**[0379]** When the disk **1c** is set in an existing reproduction apparatus, in step **307a**, management information for angle 1, i.e., stream 1 is read. In step **307f**, angle 1 is reproduced. When an angle switch instruction is issued in step **307g**, an angle (stream) switching prohibiting flag is checked in step **307h**. In an MADM disk, the angle (stream) is not switched since the flag is recorded. Accordingly, the output of the differential picture is prevented and the compatibility is maintained.

(HDTV (1080i) output)

**[0380]** A method for creating a 1080i picture to be output to an HDTV will be described. In Figure 20, a wide

525P picture is displayed as shown in the scope screen **178**. The output is transformed into a progressive signal having 1050 lines by a line doubler. The progressive signal is further transformed into an interlace signal having 1050 lines by an interlace transform section **175b**. That is, an interlace picture **178b** having about 1080 lines is obtained. Thus, output to the HDTV is realized.

(High definition audio output)

**[0381]** In Figure 20, a high definition audio signal is reproduced. In the case of linear PCM, a range of 1.5 Mbps to 4 Mbps is required. In MADM, as shown in Figure 88, a basic audio section **312** is recorded in stream 1 with **380** kbps AC3, and a high definition audio section **313** is in stream 3. An audio recording identifier **314** is recorded as an MADM identifier. In the reproduction apparatus in Figure 20, when an audio recording identifier **314** is reproduced by an audio recording identifier reproduction section **111**, an audio signal is separated from the stream 2, and a high definition audio signal is reproduced by an audio decoder **160a** and output as an audio signal in the figure.

**[0382]** In the case of DVD, one stream has only a maximum of 8 Mbps. When a high definition audio signal which can have a maximum 4 Mbps is recorded into stream 1 which already has a basic picture, the basic picture is restricted to only 4 Mbps and deteriorated in terms of quality. Thus, compatibility is not maintained. According to the present invention, the audio signal is accommodated in streams 2, 3 and 4 as the high definition audio signals **313a**, **313b** and **313c** in Figure 88. In this manner, the high definition audio signals can be recorded without deteriorating the quality of the basic picture. Especially, the data amount of 525P differential signal in stream 2 is 1/2 to 1/3 of the basic picture, and thus stream 2 still has about 4 Mbps. Even when the differential video signal and the high definition signal are recorded in streams 2 and 4 as the high definition audio signals **313a** and **313b** in Figure 88, the high definition video and audio signals can be reproduced by a 2X reproduction apparatus without deteriorating the differential signal.

(Comparison method of MADM identifier)

**[0383]** As shown in Figure 4, an MADM disk has an MADM identifier in management information such as a TXT file. However, the TXT file may possibly have the same data as the MADM identifier in error. When the non-MADM disk is reproduced as an MADM disk, malfunction occurs and an abnormal picture is synthesized and output. In order to avoid such malfunction, authentication data for comparison is recorded according to the present invention.

**[0384]** As shown in Figure 1, an authentication data generation section **315** is provided. The MADM identifier **10b** and inherent attribute information **316** of the disk

(master disk) such as the title of the disk, disk ID, disk capacity, and final address value are calculated by authentication data generation calculation section 316. Thus, MADM authentication data 318 is generated. The MADM authentication data 318 is recorded on the optical disk 1 together with the MADM identifier 10b and the authentication data 318 or progressive/3D arrangement information.

[0385] Then, the optical disk 1 is reproduced by the reproduction apparatus in Figure 5 and compared by an MADM identifier comparison section 26a.

[0386] The operation will be described in detail with reference to Figure 9. The MADM identifier comparison section 26a reads the MADM identifier 10b, the MADM authentication data 318, and the inherent attribute information 316 such as the title of the disk, disk number, capacity, and address from the optical disk 1, and compares the three types of data by the comparison calculation section 319. Only when it is determined that the data is correct by the determination section 320, an instruction to reproduce the MADM disk by the MADM reproduction section 321 is sent to the control section 21. Thus, the two streams are synthesized to output a high resolution picture or a 3D picture. When it is determined that the data is incorrect by the determination section 320, an instruction to perform ordinary reproduction by an ordinary reproduction section 322 without MADM reproduction is sent.

[0387] In this manner, even when the same data as the MADM identifier 10b is recorded in the TXT file in error, the MADM reproduction apparatus performs comparison using the comparison data. Accordingly, malfunction is prevented. The authentication data and the MADM identifier can be one piece of data, or encrypted data of the MADM identifier and the disk attribution information can be recorded.

[0388] So far, applications of a system for reproducing and synthesizing a plurality of streams, i.e., an MADM system according to the present invention have been described. Hereinafter, MADM synchronization systems will be described.

(Example 2)

[0389] The MADM system according to the present invention simultaneously reproduction of a plurality of streams. Synchronization methods are important. In the second through eighth examples, various methods of synchronization will be described. The MADM system is also applicable to recording and reproduction of high resolution pictures such as 3D or 525P pictures, which will not be described below.

[0390] As an example, in the second example, an operation of a reproduction apparatus for reading data from an optical disk having three compression video signals to be reproduced simultaneously and extending and reproducing the three compression video signals simultaneously will be described.

[0391] Figure 66 shows a data structure of the optical disk used in the optical disk reproduction apparatus in the second example.

[0392] Video signals A, B and C are MPEG-compressed to obtain compression video streams A, B and C.

[0393] The compression video streams A, B and C are each packeted in units of 2 kB into packets. A packet header of each packet includes a stream ID for indicating which one of the compression video streams A through C is stored. When the packet stores a leading part of the video frame, the packet header also includes VPTS (video presentation time stamp) as video reproduction time information indicating the time to reproduce the frame. In the second example, an NTSC signal is used as the picture signal, and the video frame cycle is about 33 msec.

[0394] On the optical disk, video packets created in the above-described manner are grouped into, for example, compression video signals A-1, B-1 and C-1 each including an appropriate number of packets based on the data stored, and multiplexed.

[0395] Figure 64 is a block diagram of the optical disk reproduction apparatus in the second example.

[0396] In Figure 64, the optical disk reproduction apparatus includes an optical disk 501 described above, an optical pickup 502 for reading data from the optical disk 501, signal processing means for performing a series of signal processing such as binarization, demodulation, and error correction to the signal read by the optical pickup 502, a buffer memory 504 for temporarily storing the data output from the signal processing means 503, division means 505 for dividing the data read from the buffer memory 504 into compression video signals, and reference time signal generation means 506 for generating a reference time signal 506 including a counter (not shown) for counting 90 kHz clocks. Reference numerals 510, 520 and 530 represent buffer memories for temporarily storing the compression video signals divided by the division means 505. Reference numerals 511, 521 and 531 represent video decoders for extending and reproducing the compression video signals. Reference numerals 512, 522 and 532 represent monitors for displaying the video signals.

[0397] Figure 65 shows the structure of each of the video decoders 511, 521 and 531.

[0398] As shown in Figure 65, the video decoder includes VPTS detection means 601 for detecting a VPTS stored in the packet header of the video packet, video extension means 602 for MPEG-extending the compression video stream, and video reproduction timing control section 603 for comparing the reference time signal and the VPTS and skipping or repeating the video reproduction on a frame-by-frame basis when the comparison result exceeds the threshold value.

[0399] The optical disk reproduction apparatus shown in Figure 64 operates in the following manner.

[0400] The optical pickup is focus-controlled or track-

ing-controlled by servo means (not shown) to read a signal from the optical disk **501** and outputs the signal to the signal processing means **503**. The signal processing means **503** subjects the signal to a series of processings including binarization, demodulation, error correction and the like. Then, the signal processing means **503** stores the resultant signal in the buffer memory **504** as digital data.

**[0401]** The buffer memory **504** functions so that, even when the data supply from the optical disk **501** is temporarily stopped by, e.g., wait state, data supply to the subsequent-stage sections is not stopped.

**[0402]** The data read from the buffer memory **504** is divided into compression video signals A through C by the division means **505** and output. The division means identifies which of the compression video signals A through C is stored in each packet with the packet ID in the packet header of the packeted data, and determines the destination based on the identification result.

**[0403]** The divided compression video signals are respectively stored in buffer memories **510** through **530**.

**[0404]** The buffer memories **510** through **530** act to continuously supply data to the video decoders **511** through **531**.

**[0405]** The video decoders **511** through **531** read data from the buffer memories **510** through **530** respectively, extend the compression signals, and output the signals as video signals to the monitors **512** through **532** respectively.

**[0406]** With reference to Figure **65**, an operation of the video decoders **511** through **531** will be described.

**[0407]** The compression video signal read from the buffer memory is input to the VPTS detection means **601** and the video extension means **602**.

**[0408]** The video extension means **602** MPEG-extends the compression video stream and outputs the video signal.

**[0409]** The VPTS detection means **601** detects the VPTS of the packet header.

**[0410]** The video reproduction timing control means **603** receives the video signal output from the video extension means **602**, a reference time signal and the VPTS output from the VPTS detection means **601**, and compares the reference time signal and the VPTS. When the difference between the two exceeds the threshold value, the video reproduction timing is controlled so that the difference between the VPTS and the reference time signal is equal to or less than the threshold value.

**[0411]** In the second example, 33 msec is used as the threshold value. The video reproduction timing control means **603** performs the following.

(reference time signal-VPTS)>33 msec.:1 frame is skipped.

(reference time signal-VPTS)<-33 msec.:1 frame is repeated.

**[0412]** In the second example, due to the precision error of the crystal oscillator used in the reference time signal generation means **506** and the video decoders **511** through **531**, the video decoders **511** and **531** are slower and the video decoder **521** is faster in terms of extension and reproduction with respect to the reference time signal. Unless reproduction timing is corrected, the reproduced video signals are out of synchronization.

**[0413]** Figure **67** is a timing diagram of video reproduction in the second example. Part (a) of Figure **67** shows the reference time signal with respect to reproduction time t. Part (b) shows the VPTS#A, which is a VPTS of the compression video signal A to be extended by the video decoder **511**, part (c) shows the VPTS#B, which is a VPTS of the compression video signal 3 to be extended by the video decoder **521**, and part (d) shows the VPTS#C, which is a VPTS of the compression video signal C to be extended by the video decoder **531**.

**[0414]** The video decoder **511** continues extension and reproduction of the compression video signal A, and the difference between the VPTS#A and the reference time signal exceeds 33 msec. as the threshold value at T1. Accordingly, the video reproduction timing control means of the video decoder **511** skips one frame, which is originally to be reproduced, to correct the reproduction timing so that the difference between the VPTS#A and the reference time signal is equal to or less than the threshold value.

**[0415]** The video decoder **521** continues extension and reproduction of the compression video signal B, and the difference between the VPTS#B and the reference time signal exceeds -33 msec. as the threshold value at T2. Accordingly, the video reproduction timing control means of the video decoder **521** reproduces one frame in repetition, which has been already reproduced, to correct the reproduction timing so that the difference between the VPTS#B and the reference time signal is equal to or less than the threshold value.

**[0416]** Similarly, the video decoder **531** continues extension and reproduction of the compression video signal C, and the difference between the VPTS#C and the reference time signal exceeds 33 msec. as the threshold value at T3. Accordingly, the video reproduction timing control means of the video decoder **531** skips one frame, which is originally to be reproduced, to correct the reproduction timing so that the difference between the VPTS#C and the reference time signal is equal to or less than the threshold value.

**[0417]** As described above, in the second example, when the difference between the reference time signal and the VPTS detected by each video decoder exceeds the threshold value, the video reproduction timing control means of each video decoder performs correction so that difference between the reference time signal and the VPTS does not exceed the threshold value. In this manner, the pictures reproduced by video decoders can

be synchronized with one another.

(Example 3)

[0418] The third example relates to a reproduction apparatus for correcting a reference time signal using audio reproduction time information indicating the time to reproduce the audio signal and synchronizes a plurality of video signals based on the reference time signal.

[0419] Figure 70 shows a data structure of the optical disk used in the optical disk reproduction apparatus in the third example. The optical disk includes compression audio data in addition to the data included in the optical disk used in the second example.

[0420] An audio signal is audio-framed in units of 32 msec. for compression to obtain a compression audio stream. The audio stream is packeted in units of 2 kB into audio packets and recorded on the optical disk. A packet header of each audio packet includes a stream ID for indicating that the stored data is a compression audio stream. When the packet stores a leading part of the audio frame, the packet header also includes APTS (audio presentation time stamp) as audio reproduction time information indicating the time to reproduce the frame.

[0421] Figure 68 is a block diagram of the reproduction apparatus in the third example.

[0422] Elements 501 through 532 are the same as those shown in Figure 64 in the second example.

[0423] Reference numeral 504 represents a buffer memory for temporarily storing the compression audio signal. Reference numeral 541 represents audio extension means for extending the compression audio signal. Reference numeral 542 represents a speaker for reproducing the extended audio signal.

[0424] Figure 69 shows a structure of the audio decoder 541. The audio decoder 541 includes APTS detection means 701 for detecting an APTS stored in a packet header of the audio packet, and audio extension means 702 for extending the compression audio stream.

[0425] An operation of the optical disk reproduction apparatus shown in Figure 68 for reproducing the optical disk shown in Figure 70 will be described.

[0426] The operation until the signal is input to the division means 505 is similar to that with the optical disk reproduction apparatus in the second example.

[0427] The data read from the buffer memory 504 is divided into compression video signals A through C and a compression audio signal by the division means 505 and output. The division means 505 identifies which of the compression video signals A through C and the compression audio signal is stored in each packet with the packet ID in the packet header of the packeted data, and determines the destination based on the identification result.

[0428] The divided compression video signals and compression audio signal are respectively stored in

buffer memories 510 through 540.

[0429] The video decoders 511 through 531 read data from the buffer memories 510 through 530 respectively, extend the compression video signals, and output the signals as video signals to the monitors 512 through 532 respectively. The audio decoder 541 reads data from the buffer memory 540, extends the compression audio signal, and outputs the signal as an audio signal through the speaker 542.

[0430] The operations of the video decoders 511 through 531 for extending the compression video signals and for correcting the synchronization when the difference between the reference time signal and the VPTS exceeds the threshold value are the same as in the second example.

[0431] The compression audio signal read from the buffer memory 540 is input to the audio decoder 541. APTS detection means 701 detects an APTS and outputs. Audio extension means 702 extends the compression audio stream and outputs the audio signal.

[0432] The VPTS signal output from the audio decoder 541 is input to the reference time signal generation means 506, and the reference time signal is corrected by the APTS.

[0433] In the third example, due to the precision error of the crystal oscillator used in the reference time signal generation means 506, the video decoders 511 through 531 and the audio decoder 541, the reference time signal is faster in terms of extension and reproduction with respect to the audio decoder 541. The video decoder 511 is slower and the video decoder 521 is faster in terms of extension and reproduction with respect to the reference time signal. Unless reproduction timing is corrected, the reproduced video signals and audio signal are out of synchronization.

[0434] Figure 71 is a timing diagram of audio reproduction in the third example. Part (a) of Figure 71 shows the APTS with respect to reproduction time  $t$ . Part (b) shows the reference time signal. Part (c) shows the VPTS#A, at which the compression video signal A to be extended by the video decoder 511 is to be reproduced, and part (d) shows the VPTS#B, at which the compression video signal B to be extended by the video decoder 521 is reproduced.

[0435] Figure 71 does not show the VPTS#C, at which the compression video signal C to be extended by the video decoder 531, but the diagram is almost the same as in Figure 67 regarding the second example.

[0436] The reference time signal generation means 506 is corrected using the APTS at time when the APTS shows  $ta_1$  and  $ta_2$ , and the reference time signal is reset as  $ta_1$  and  $ta_2$  at the respective time.

[0437] The video decoder 511 continues extension and reproduction of the compression video signal A, and the difference between the VPTS#A and the reference time signal exceeds 33 msec. as the threshold value at  $T_4$ . Accordingly, the video reproduction timing control means of the video decoder 511 skips one frame which



is originally to be reproduced to correct the reproduction timing so that the difference between the VPTS#A and the reference time signal is equal to or less than the threshold value.

[0438] The video decoder 521 continues extension and reproduction of the compression video signal B, and the difference between the VPTS#B and the reference time signal exceeds -33 msec. as the threshold value at T5 and T6. Accordingly, the video reproduction timing control means of the video decoder 521 reproduces one frame in repetition which has been already reproduced to correct the reproduction timing so that the difference between the VPTS#B and the reference time signal is equal to or less than the threshold value.

[0439] As described above, in the third example, when the difference between the reference time signal and the VPTS detected by each video decoder exceeds the threshold value, the video reproduction timing control means of each video decoder performs correction so that difference between the reference time signal and the VPTS does not exceed the threshold value. In this manner, the pictures reproduced by video decoders can be synchronized with one another.

[0440] Regarding the difference between the reference time signal and the APTS, the APTS is not corrected using the reference time signal but the reference time signal is corrected using the APTS. Accordingly, audio and video signals are synchronized with no unnaturalness in the audio output.

(Example 4)

[0441] The fourth example relates to a reproduction apparatus for correcting the reference time signal using a VPTS detected by one video decoder and synchronizing a plurality of video signals based on the reference time signal.

[0442] Figure 72 is a block diagram of an optical disk reproduction apparatus in the fourth example.

[0443] Elements 501 through 532 are the same as those in the second example. Reference numeral 551 represents a video decoder used in the fourth example.

[0444] The video decoder 551 has a function of outputting the detected VPTS. Figure 73 shows a structure of the video decoder 551.

[0445] The video decoder 551 includes VPTS detection means 801 for detecting a VPTS indicating the reproduction time of the video signal multiplexed as the compression video signal and video extension means 802 for extending the compression video stream.

[0446] In the fourth example, due to the precision error of the crystal oscillator used in the reference time signal generation means 506 and the video decoders 521, 531 and 551, the reference time signal is faster in terms of extension and reproduction with respect to the video decoder 551. The video decoder 521 is slower and the video decoder 531 is faster in terms of extension and reproduction with respect to the reference time sig-

nal. Unless reproduction timing is corrected, the reproduced video signals are out of synchronization.

[0447] Figure 74 is a timing diagram of video output in the fourth example. Part (a) of Figure 74 shows the VPTS#A detected by the video decoder 511 with respect to reproduction time t. Part (b) shows the reference time signal. Part (c) shows VPTS#B, at which the compression video signal B to be extended by the video decoder 521 is to be reproduced, and part (d) shows the VPTS#C, at which the compression video signal C to be extended by the video decoder 531 is to be reproduced.

[0448] The reference time signal generation means 506 is corrected using the APTS at time when the APTS shows tv1 and tv2, and the reference time signal is reset as tv1 and tv2 at the respective time.

[0449] The video decoder 521 continues extension and reproduction of the compression video signal B, and the difference between the VPTS#B and the reference time signal exceeds 33 msec. as the threshold value at T7. Accordingly, the video reproduction timing control means of the video decoder 521 skips one frame which is originally to be reproduced to correct the reproduction timing so that the difference between the VPTS#B and the reference time signal is equal to or less than the threshold value.

[0450] Similarly, the video decoder 531 continues extension and reproduction of the compression video signal C, and the difference between the VPTS#C and the reference time signal exceeds 33 msec. as the threshold value at T8. Accordingly, the video reproduction timing control means of the video decoder 531 reproduces one frame in repetition which has been already reproduced to correct the reproduction timing so that the difference between the VPTS#C and the reference time signal is equal to or less than the threshold value.

[0451] As described above, in the fourth example, when the difference between the reference time signal and the values of VPTSs detected by the video decoders 521 and 531 exceeds the threshold value, the video reproduction timing control means of each video decoder performs correction so that the difference between the reference time signal and the VPTS does not exceed the threshold value.

[0452] By correcting the reference time signal using the VPTS#A detected by the video decoder 551, the video signal reproduced by the video decoder 551 is not accompanied by any unnaturalness in the visual output due to the frame-by-frame skipping or repeated reproduction. Thus, the pictures can be synchronized with one another.

(Example 5)

[0453] The fifth example relates to a reproduction apparatus including a plurality of video decoders for extending and reproducing a compression video signal. Each of the video decoders includes reference time signal generation means. The reproduction apparatus cor-

rects the reference time signal of each video decoder using an APTS indicating the time to reproduce an audio signal to realize synchronization.

[0454] In the fifth example, the optical disk shown in Figure 70 is used.

[0455] Figure 75 is a block diagram of an optical disk reproduction apparatus in the fifth example.

[0456] Elements 501 through 542 are the same as those shown in Figure 68 in the third example. Unlike the reproduction apparatus shown in Figure 68, the reproduction apparatus in this example does not have reference time signal generation means 506 independently, but each video decoder has reference time signal generation means.

[0457] Reference numeral 561 represents a video decoder for extending and reproducing compression video signal A, reference numeral 571 represents a video decoder for extending and reproducing compression video signal B, and reference numeral 581 represents a video decoder for extending and reproducing compression video signal C.

[0458] Figure 76 shows a structure of each of the video decoders 561 through 581 used in the fifth example.

[0459] The video decoder includes VPTS detection means 901 for detecting a VPTS indicating the reproduction time of the video signal multiplexed as the compression video signal, video extension means 902 for extending the compression video stream, and video reproduction timing control means 903 for comparing the reference time signal and the VPTS and skipping or repeating the video reproduction on a frame-by-frame basis when the comparison result exceeds the threshold value, and reference time signal generation means 904 for generating the reference time signal.

[0460] In the fifth example, the reference time signal of reference time signal generation means 904 included in each of the video decoders 561 through 581 is corrected using the APTS detected by the video decoder 541.

[0461] Since the reference time signals are corrected using the same APTS, the reference time signals generated in the video decoders 561 through 581 show the same value after being corrected.

[0462] After the correction using the APTS, as in the third example, when the difference between the reference time signal and the values of VPTS detected by each video decoder exceeds the threshold value, the video reproduction timing control means of each video decoder performs correction by skipping or repeating the reproduction on a frame-by-frame basis so that difference between the reference time signal and the VPTS does not exceed the threshold value.

[0463] As described above, in the fifth example, the reference time signal generated in each video decoder is corrected with an APTS, and the video reproduction timing control means of each video decoder maintains the difference between each reference time signal and each VPTS to be equal to or less than the threshold val-

ue. Thus, the pictures can be synchronized with one another.

[0464] As in the third example, the audio signal and the video signal can be synchronized without providing any inconvenience in the audio output.

[0465] In the fifth example, the reference time signals in the video decoders 561 through 581 are corrected using the APTS detected by the audio decoder 541. The pictures can be reproduced in synchronization in a similar manner by using one of the video decoders shown in Figure 73 in the fourth example and correcting the reference time signals of the other video decoders using the VPTS detected by the one video decoder.

(Example 6)

[0466] The sixth example relates to a reproduction apparatus for simultaneously reproducing two compression video signals. The two compression video signals are obtained by dividing a signal into a right-eye video signal and a left-eye video signal and compressing the divided video signals.

[0467] The overall structure of the apparatus is generally similar to that of the optical disk reproduction apparatus shown in Figure 75 in the fifth example, but the reproduction apparatus in the sixth example includes two video decoders for extending compression video signals obtained after the division means 505 since two video signals are to be reproduced simultaneously. Figure 77 shows a structure of one of the video decoders used in the sixth example, and Figure 78 shows a structure of the other video decoder used in the sixth example.

[0468] As shown in Figure 77, the video decoder includes VPTS detection means 1001 for detecting a VPTS indicating the reproduction time of the video signal multiplexed as the compression video signal, video extension means 1002 for extending the MPEG compression video stream, reference time signal generation means 1004 for generating a reference time signal, and video reproduction timing control means 1003 for comparing the reference time signal and the VPTS and skipping or repeating the video reproduction on a frame-by-frame basis when the comparison result exceeds the threshold value and also for outputting a horizontal synchronization signal and a vertical synchronization signal for the picture reproduced.

[0469] As shown in Figure 78, the other video decoder includes VPTS detection means 1101 for detecting a VPTS indicating the reproduction time of the video signal multiplexed as the compression video signal, video extension means 1102 for extending the MPEG compression video stream, reference time signal generation means 1104 for generating a reference time signal, and video reproduction timing control means 1003 for comparing the reference time signal and the VPTS and skipping or repeating the video reproduction on a frame-by-frame basis when the comparison result exceeds the

threshold value, for outputting a horizontal synchronization signal and a vertical synchronization signal for the picture reproduced, and also reproducing the extended video signal in synchronization with the horizontal/vertical synchronization signals.

[0470] The video decoders are connected to each other so that the horizontal synchronization signal and the vertical synchronization signal output from the video decoder in Figure 77 are sent to the video decoder in Figure 78.

[0471] In the optical disk reproduction apparatus in the sixth example having the above-described structure, the reference time signal generated by each video decoder is corrected with an APTS, and the video reproduction timing control means of each video decoder maintains the difference between each reference time signal and each VPTS to be equal to or less than the threshold value. Thus, the right-eye picture and the left-eye picture can be synchronized with one another on a frame-by-frame basis. By using the horizontal and vertical synchronization signals output by one of the video decoder as the horizontal and the vertical synchronization signals of the other video decoder, two pictures can be reproduced in synchronization on a pixel-by-pixel basis.

[0472] In the sixth example, compression video signals obtained from a 3D video signal are used and divided into the right-eye and left-eye signals. Alternatively, for example, an original video signal having a first resolution is divided in a vertical and/or horizontal direction into at least two video signals including a first video signal and a second video signal having a second resolution which is lower than the first resolution. The resultant signals are compressed to be used. Thus, a plurality of video signals in synchronization with one another on a pixel-by-pixel basis can be obtained as from a 3D video signal. By synthesizing such resultant signals, the clear original video signal having the original resolution is reproduced.

(Example 7)

[0473] The seventh example relates to an optical disk reproduction apparatus for extending one compression video signal and two compression audio signals and reproducing the signals simultaneously.

[0474] Figure 81 shows a data structure of the optical disk used in the seventh example.

[0475] Two audio signals D and E are compressed to obtain compression audio streams D and E. A video signal is compressed to obtain a compression video stream.

[0476] The compression audio streams D and E and the compression video stream are packeted in units of 2 kB into audio packets and video packets. A packet header of each packet includes a stream ID for indicating which of the compression audio streams D and E and the compression video stream is stored, and the

APTS and VPTS.

[0477] Figure 79 is a block diagram of the reproduction apparatus in the sixth example.

[0478] The reproduction apparatus has a generally similar structure to that in Figure 68. The audio decoder 541 has the same structure as that shown in Figure 69, and the video decoder 531 has the same structure as that shown in Figure 65. The audio decoder 591 has the same structure as that shown in Figure 80.

[0479] Reference numeral 590 represents a buffer memory for temporarily storing the compression audio signal like the buffer memory 540. Reference numeral 592 represents a speaker for reproducing the audio signal.

[0480] Figure 80 shows a structure of the audio decoder 591. The audio decoder 591 includes APTS detection means 1201 for detecting an APTS stored in a packet header of the audio packet, audio extension means 1202 for extending the compression audio stream, and audio reproduction timing control means 1203 for comparing the reference time signal and the APTS and skipping or repeating the audio reproduction on an audio frame-by-audio frame basis when the comparison result exceeds the threshold value.

[0481] A reproduction operation in the seventh example will be described.

[0482] The operation until the signal read from the optical disk 501 is input to the division means 505 is similar to that in the other examples.

[0483] The data read from the buffer memory 504 is divided by the division means 505 into a compression video signal, the compression audio signal D and the compression audio signal E, and output. The division means 505 identifies which of the compression video signal, the compression audio signal D and the compression audio signal E is stored in each packet with the packet ID in the packet header of the packeted data, and determines the destination based on the identification result.

[0484] The divided compression video signal, the compression audio signal D and compression audio signal are temporarily stored in buffer memories 530, 540 and 590 respectively.

[0485] The video decoders reads data from the buffer memory 530, extends the compression video signal and outputs the signal as a video signal to a monitor 532. The audio decoders 541 and 591 read data from the buffer memories 540 and 590, extend the compression audio signals and output the signals as audio signals through the speakers 542 and 592.

[0486] The reference time signal generated by the reference time signal generation means 506 is corrected by an APTS#D detected by the audio decoder 541.

[0487] In the audio decoder 591, an APTS#E is detected by the APTS detection means 1201 and the compression audio signal E is extended by the audio extension means 1202. The audio reproduction timing control means 1203 receives the extended audio signal output

from the audio extension means **1202**, the reference time signal, and the APTS#E from the APTS detection means **1201**, compares the reference time signal and the APTS#E. When the difference between the reference time signal and the APTS#E exceeds the threshold value, the audio reproduction timing control means **1203** controls the audio reproduction timing so that the difference is equal to or less than the threshold value.

**[0488]** In the seventh example, 32 msec is used as the threshold value. The video reproduction timing control means **1203** performs the following.

(reference time signal-APTS#E)>32 msec.:1 audio frame is skipped.

(reference time signal-APTS#E)<-32 msec.:1 audio frame is repeated.

**[0489]** The operation of the video decoder **531** for extending the compression video signal and correction performed when the difference between the reference time signal and the VPTS exceeds the threshold value are similar to those in the second example.

**[0490]** In the seventh example, due to the precision error of the crystal oscillator used in the reference time signal generation means **506**, the video decoder **531**, and the audio decoders **541** and **591**; the audio decoders **541** and **591** are slower and the video decoder **531** is faster in terms of extension and reproduction with respect to the reference time signal. Unless reproduction timing is corrected, the reproduced video signals are out of synchronization.

**[0491]** Figure **82** is a timing diagram of video reproduction in the seventh example. Part (a) of Figure **82** shows the APTS#D with respect to reproduction time t. Part (b) shows the reference time signal, part (c) shows APTS#E, at which the compression audio signal E to be extended by the audio decoder **531** is to be reproduced, and part (d) shows the VPTS, at the compression video signal to be extended by the video decoder **531** is to be reproduced. The reference time signal is corrected using the APTS#D when APTS#D shows ta3 and ta4. The reference time signal is reset to ta3 and ta4 at the respective time.

**[0492]** The audio decoder **591** continues extension and reproduction of the compression audio signal E, and the difference between the VPTS#E and the reference time signal exceeds 32 msec. as the threshold value at T10. Accordingly, the video reproduction timing control means **1203** of the audio decoder **591** skips one audio frame which is originally to be reproduced to correct the reproduction timing so that the difference between the VPTS#E and the reference time signal is equal to or less than the threshold value.

**[0493]** The difference between the VPTS and the reference time signal exceeds -33 msec. as the threshold value at T11 and T12. Accordingly, the video reproduction timing control means of the video decoder **531** reproduces one frame in repetition which has been al-

ready reproduced at the respective time to correct the reproduction timing so that the difference between the VPTS and the reference time signal is equal to or less than the threshold value.

**[0494]** As described above, in the seventh example, when the difference between the reference time signal and the VPTS#E detected by the audio decoder **591** exceeds the threshold value, the video reproduction timing control means of the audio decoder performs correction so that difference between the reference time signal and the APTS#E does not exceed the threshold value. In this manner, each audio signal and the picture can be synchronized with one another.

(Example 8)

**[0495]** In the eighth example, the clock for performing extension is changed for audio reproduction control.

**[0496]** The overall structure and operation of the reproduction apparatus in the eighth example are generally similar to those of the optical disk reproduction apparatus in the seventh example, but the operation of audio reproduction timing control performed when the reference time signal and the APTS#E exceeds the threshold value is different from that of the seventh example. With reference to Figure **83** and **84**, audio reproduction timing control used in the eighth example will be described.

**[0497]** Figure **83** shows an operation when the difference between the APTS#E and the reference timing signal exceeds 32 msec. which is the threshold for the audio reproduction. Part (a) of Figure **83** shows the reference time signal with respect to reproduction time t. Part (b) shows the APTS#E, and part (c) shows the clock frequency at which the audio decoder **591** performs extension and reproduction. Ordinary extension and reproduction are performed by clock f0 having a frequency which is 384 times the sampling frequency fs of the audio signal. The difference between the APTS#E and the reference time signal exceeds 32 msec. at time T11, and accordingly, audio reproduction control means switches the clock f0 to f1. The frequency of clock f1 is higher by 10% than the frequency of clock f0. Extension performed with clock f1 proceeds faster than extension performed with clock f0 by 10%. With clock f1, the extension is performed for 320 msec. from the point where the difference between the APTS#E and the reference time signal exceeds 32 msec. which is the threshold value. Thus, the reproduction timing is corrected so that the difference between the APTS#E and the reference time signal is equal to or less than the threshold value.

**[0498]** Figure **84** shows an operation when the difference between the APTS#E and the reference timing signal exceeds -32 msec. which is the threshold for the audio reproduction. Part (a) of Figure **83** shows the reference time signal with respect to reproduction time t. Part (b) shows the APTS#E, and part (c) shows the clock frequency at which the audio decoder **591** performs extension and reproduction.

sion and reproduction.

**[0499]** The difference between the APTS#E and the reference time signal exceeds -32 msec. at time T12, and accordingly, audio reproduction control means switches the clock f0 to f2. The frequency of clock f2 is lower by 10% than the frequency of clock f0. Extension performed with clock f2 proceeds more slowly than extension performed with clock f0 by 10%. With clock f2, the extension is performed for 320 msec. from the point where the difference between the APTS#E and the reference time signal exceeds -32 msec. which is the threshold value. Thus, the reproduction timing is corrected so that the difference between the APTS#E and the reference time signal is equal to or less than the threshold value.

**[0500]** As described above, when the difference between the APTS#E and the reference time signal exceeds the threshold value for the audio reproduction, the clock by which the signal is extended is changed so that the extension is performed at a higher speed or lower speed than the normal speed. By such an operation, the reproduction timing is controlled so that the difference between the APTS#E and the reference time signal is equal to or less than the threshold value. Thus, the audio signals and the video signal can be reproduced in synchronization with no unnaturalness in the audio output.

**[0501]** In the eighth example, the frequency of the clock is changed by 10%. Needless to say, a more natural audio signal is obtained by reducing the clock less or gradually.

**[0502]** In the seventh and eighth examples, the reference time signal is corrected using the APTS#D. Alternatively, the video decoder shown in Figure 73 can be used, in which case the VPTS output from the video decoder can be used for correction.

**[0503]** The present invention has been described by way of specific examples.

**[0504]** The comparison between the reference time signal and the VPTS or APTS, control of the reproduction time, correction of the reproduction timing can be performed by a microcomputer which controls the entirety of the reproduction apparatus.

**[0505]** In the above examples, the present invention is applied to optical disk reproduction devices. The present invention is also applicable to a reproduction apparatus for extending signals supplied through communication networks and digital satellite broadcasting as compression signals.

#### INDUSTRIAL APPLICABILITY

**[0506]** A basic video signal and an interpolation signal are divided into frames each having 1 GOP or more and subjected to interleaving alternately to be recorded on the optical disk as interleave blocks 54 and 55. From such an optical disk, a progressive/3D reproduction apparatus reproduces both information in the interleave block for the odd field (right eye) and information in the

interleave block for the even field (left eye). Thus, a progressive/3D picture is obtained. A non-progressive/3D reproduction apparatus reproduces information in the interleave block of only odd field (right eye) or even field (left eye) by track jump. Thus, a complete two-dimensional picture is obtained. Thus, compatibility is realized.

**[0507]** Especially, a progressive/3D picture arrangement information file and a progressive/3D picture identifier are recorded on the optical disk. Accordingly, the location of the progressive/3D is easily determined. Therefore, two ordinary interlace signals can be made into a progressive signal. Furthermore, it can be avoided that pictures for the right eye and left eye of different contents are output on the 3D TV.

**[0508]** In a 3D reproduction apparatus, a pointer used for two-dimensional display is used when a 3D identifier is available to change the access process. Thus, 3D pictures can be continuously displayed. Moreover, a 3D reproduction apparatus is realized without changing the two-dimensional format.

**[0509]** According to the synchronization method of the present invention, a plurality of video signals or a plurality of audio signals to be simultaneously reproduced are extended in synchronization for reproduction.

**[0510]** In the embodiment where a horizontal synchronization signal and a vertical synchronization signal which are output from one video decoder are used as the horizontal synchronization signal and the vertical synchronization signal of another video decoder, synchronization on a pixel-by-pixel basis is realized even when, for example, a plurality of compression video signals are extended and the extended signals are synthesized into a 3D picture or a high resolution picture.

**[0511]** In a reproduction apparatus in which the reference time signal is corrected using an APTS detected by an audio decoder and the video output timing is controlled so that the VPTS matches the corrected reference time signal, an audio signal and a plurality of video signals are synchronized for reproduction with no unnaturalness in the audio output.

**[0512]** In a reproduction apparatus in which the audio output timing is controlled by changing an extension clock, audio and video signals are synchronized for reproduction with no unnaturalness in the audio output with no interruption or pause in the audio signal.

#### Claims

1. An optical disk reproduction apparatus for reproducing data from an optical disk, in which the data on the disk includes:

a first video stream corresponding to a first signal source, the first video stream being recorded on the disk as a plurality of first interleave units (6), each interleave unit including a plurality of frames (5) from the first video stream

a simultaneous second video stream corresponding to a second signal source, the second video stream being recorded on the disk as a plurality of second interleave units (8), each interleave unit including a plurality of frames (7) from the second video stream, first time information (VPTS) associated with the first video stream and related to reproduction timing of the first video stream, second time information (VPTS) associated with the second video stream and related to reproduction timing of the second video stream in order to enable an output substantially simultaneous with the first stream,

wherein the first and second interleave units are recorded in a prescribed order; the optical disk reproduction apparatus comprising:

a reproduction section (24) for reproducing a signal recorded on the optical disk;  
a division section (25) for dividing the reproduced signal into reproduced first interleaved units representing the first video stream, and reproduced second interleave units representing the second video stream;  
a decoding section (16) for decoding the first interleave units and the second interleave units; and  
an output section (29-31) for outputting a decoded first interleave unit and a decoded second interleave unit substantially simultaneously at a timing defined by the first time information for the first interleave unit and by the second time information for the second interleave unit.

2. An optical disk reproduction apparatus according to claim 1, further comprising a synthesis section (36; 90) for synthesizing the decoded first interleave unit and the decoded second interleave unit.

3. An optical disk reproduction apparatus according to claim 2, wherein:

a high resolution video signal includes a low resolution component and a high resolution component,  
the first video stream represents the low resolution component,  
the second video stream represents the high resolution component, and  
the synthesis section (36; 90) synthesizes the decoded interleave unit and the decoded second interleave unit to generate the high resolution video signal.

4. An optical disk reproduction apparatus according to claim 2, wherein:

a three-dimensional video signal includes a right-eye signal and a left-eye signal,  
the first video stream represents the right-eye signal,  
the second video stream represents the left-eye signal, and  
the synthesis section (36; 90) synthesizes the decoded first interleave unit and the decoded second interleave unit, thus generating the three-dimensional video signal.

5. An optical disk reproduction apparatus according to claim 2, wherein the synthesis section (90) performs a prescribed first calculation to the first interleave unit and the second interleave unit, performs a prescribed second calculation to the first interleave unit and the second interleave unit, and synthesizes a result of the prescribed first calculation and a result of the prescribed second calculation, thus generating a synthesis signal.

6. An optical disk reproduction apparatus according to claim 5, wherein the prescribed first calculation includes a sum calculation of the first interleave unit and the second interleave unit, and the prescribed second calculation includes a difference calculation of the first interleave unit and the second interleave unit.

7. An optical disk reproduction apparatus according to claim 6, wherein the first calculation further includes a calculation of adding a first value to a result of the sum calculation, and the second calculation further includes a calculation of adding a second value to a result of the difference calculation.

8. An optical disk reproduction apparatus according to claim 6, wherein the synthesis section assigns the result of the first calculation to picture data of an S'th line and assigns the result of the second calculation to picture data of an (S+1)th line, and S is an integer.

9. An optical disk reproduction apparatus according to claim 8, for reproducing an optical disk obtained by performing a first division calculation and a second division calculation on a P'th frame of an input video signal using video data of at least a 2Q'th line and a (2Q+1)th line of the input video signal, locating a result of the first division calculation in a 2Q'th line of the first video stream, locating a result of the second division calculation in a 2Q'th line of the second video stream, performing the first division calculation and the second division calculation on a (P+1)th frame of the input video signal using video data of at least the 2Q'th line and the (2Q+1)th line of the input video signal, locating a result of the first division calculation in a (2Q+1)th line of the first video stream, and locating a result of the second division

calculation in a  $(2Q+1)$ th line of the second video stream,

wherein the synthesis section performs the sum calculation and the difference calculation of a video signal of a  $2Q$ 'th or a  $2(Q+1)$ th line of a decoding signal of the first video stream and a video signal of the  $2Q$ 'th or the  $(2Q+1)$ th line of the second video stream, thus generating a synthesis signal which has a result of the sum calculation as a video signal of a  $2R$ 'th line and a result of the difference calculation as a video signal of a  $(2R+1)$ th line; and  $R$  and  $Q$  are each an integer, and  $R$  has a specific relationship with  $Q$ .

10. An optical disk reproduction apparatus according to claim 6, wherein the synthesis section generates a synthesis signal using color information of the first video stream but without using color information of the second video stream.

11. An optical disk reproduction apparatus according to claim 6, wherein:

the high resolution video signal includes a low resolution component and a high resolution component, and the synthesis section transforms a parameter of the sum calculation and the difference calculation based on filter identification information which represents a division filter parameter of the high resolution component and the low resolution component.

12. An optical disk reproduction apparatus according to claim 5, wherein:

a high resolution video signal includes a low resolution component and a high resolution component, the first video stream represents the low resolution component, the second video stream represents the high resolution component, and the synthesis section generates a synthesis signal using color information of the first video stream but without using color information of the second video stream.

13. An optical disk reproduction apparatus according to claim 5, wherein:

a high resolution video signal includes a low resolution component and a high resolution component, the first video stream represents the low resolution component, the second video stream represents the high resolution component, and

the synthesis section alters a calculation parameter in accordance with division information which represents a division parameter when the high resolution signal is separated from the low resolution signal, the division information being reproduced from the optical disk.

14. An optical disk reproduction apparatus according to claim 13, wherein a filter constant is used as the calculation parameter.

15. An optical disk reproduction apparatus according to claim 5, wherein the synthesis section synthesizes the result of the prescribed first calculation and the result of the prescribed second calculation in a vertical direction.

16. An optical disk reproduction apparatus according to claim 5, wherein the synthesis section synthesizes the result of the prescribed first calculation and the result of the prescribed second calculation in a horizontal direction.

17. An optical disk reproduction apparatus according to claim 5, wherein the synthesis section transforms the synthesis signal into a progressive signal.

18. An optical disk reproduction apparatus according to claim 2, wherein the decoding section performs decoding using a motion compensation signal of the first video stream as a motion compensation signal of the second video stream.

19. An optical disk reproduction apparatus according to claim 2, further comprising video identification means for identifying identification information (61) which indicates that a high resolution video signal or a three-dimensional video signal are recorded, wherein:

when the video identification means identifies the identification information (61), the optical disk reproduction apparatus (24) optionally reproduces both the first interleave unit and the second interleave unit, and the decoding section (16) and the synthesis section (36; 90) respectively decodes and synthesizes the high resolution video signal and/or the three-dimensional video signal.

20. An optical disk reproduction apparatus according to claim 19, wherein, when the video identification means does not reproduce the identification information, the optical disk reproduction apparatus optionally reproduces only the first interleave unit.

21. An optical disk reproduction apparatus according to claim 20, wherein, when the video identification

means does not reproduce the identification information, the optical disk reproduction apparatus optionally reproduces only the first interleave unit and outputs the first interleave unit with the number of scanning lines of the first signal source being increased.

22. An optical disk reproduction apparatus according to claim 1, for reproducing an optical disk having first reproduction information indicating that information for reproducing the first interleave unit is present and information for reproducing the second interleave unit is absent, second reproduction information indicating that information for reproducing the first interleave unit and information for reproducing the second interleave unit are both present, identification information indicating that the first reproduction information is valid, and high resolution video signal/three-dimensional video signal recording identification information indicating that high resolution or three-dimensional video signal is divided into the first video stream and the second video stream,
- wherein, when the high resolution video signal/three-dimensional video signal recording identification information is detected, the optical disk reproduction apparatus optionally reproduces both the first interleave unit and the second interleave unit in accordance with the second reproduction information.
23. An optical disk reproduction apparatus according to claim 22, wherein the optical disk reproduction apparatus reproduces the second reproduction information to acquire starting position information of an immediately subsequent interleave unit of a specific interleave unit in each video stream, and thus reproduces both the first interleave unit and the second interleave unit.
24. An optical disk reproduction apparatus according to claim 22, wherein, when the high resolution video signal/three-dimensional video signal recording identification information is not detected, the optical disk reproduction apparatus reproduces the first interleave unit in accordance with the first reproduction information.
25. An optical disk reproduction apparatus according to claim 1, wherein the optical disk stores  $n$  pieces of video streams respectively corresponding to  $n$  pieces of signal sources, and

the optical disk reproduction apparatus further comprises a selection section for selecting  $i$  pieces of video streams including the first video stream and the second video stream from the  $n$  pieces of video streams, and  $n$  and  $i$  are each

an integer of two or more.

26. An optical disk reproduction apparatus according to claim 25, wherein the division section includes a buffer section for buffering the  $i$  pieces of video streams, and the buffer section has a total capacity of  $1102 \times (i-1)$  kbyte or more.
27. An optical disk reproduction apparatus according to claim 26, wherein  $i=2$ .
28. An optical disk reproduction apparatus according to claim 1, wherein at least the first video stream and the second video stream are decoded simultaneously, and a one-screen video signal having the first video stream located on a first area and the second video stream located on a second area is output.
29. An optical disk reproduction apparatus according to claim 28, wherein the first area and the second area are different from each other in a horizontal direction.
30. An optical disk reproduction apparatus according to claim 29, wherein the synthesis section includes a line memory (28c).
31. An optical disk reproduction apparatus according to claim 28, wherein information displayed on the first area is enlarged or reduced in accordance with an externally input instruction signal.
32. An optical disk reproduction apparatus according to claim 31, wherein the synthesis section includes a frame memory.
33. An optical disk reproduction apparatus according to claim 31, wherein the first area is enlarged and the second area is reduced in accordance with an externally input instruction signal.
34. An optical disk reproduction apparatus according to claim 28, wherein a sub picture of either one of the first video stream and the second video stream is displayed.
35. An optical disk reproduction apparatus according to claim 28, wherein a frame memory (28d) is used to continuously display the first video stream on the first area,  $n$  pieces of display areas are provided to discontinuously display an  $n$ 'th stream in an  $n$ 'th area, and  $n$  is an integer of one or more.
36. An optical disk reproduction apparatus according to claim 28, wherein only an audio signal of the first video stream is output.
37. An optical disk reproduction apparatus according to



claim 28, wherein an audio signal of the first video stream and an audio signal of the second video stream are output, and the audio level of the second video stream is lowered.

38. An optical disk reproduction apparatus according to claim 1, wherein the output section outputs the first video stream as a right-eye signal and the second video stream as a left-eye signal.

39. An optical disk reproduction apparatus according to claim 38, wherein the output section outputs the first video stream to a right-eye video output section and the second video stream to a left-eye video output section.

40. An optical disk reproduction apparatus according to claim 39, wherein the output section outputs a synchronization signal for three-dimensional spectacles, the synchronization signal including an identification signal of the left-eye signal and the right-eye signal.

41. An optical disk reproduction apparatus according to claim 39, wherein the output section outputs the three-dimensional video only when a three-dimensional video output instruction is issued.

42. An optical disk reproduction apparatus according to claim 39, wherein, while an area storing a three-dimensional video signal is reproduced, the output section outputs a display to a display section that the three-dimensional video signal is being reproduced.

43. An optical disk reproduction apparatus according to claim 38, wherein the output section includes a mixture synthesis section for synchronizing the time information of the first video stream and the time information of the second video stream, mixes the first and second video streams on a field-by-field basis or on a frame-by-frame basis, and outputs the first and second video streams alternately.

44. An optical disk reproduction apparatus according to claim 43, wherein the output section includes a three-dimensional switch signal section (20) for outputting a signal for switching the left-eye signal and the right-eye signal.

45. An optical disk reproduction apparatus according to claim 43, wherein the mixture synthesis section identifies the signal is a three-dimensional video signal and mixes the first video stream and the second video stream only when a three-dimensional video output instruction is issued.

46. An optical disk reproduction apparatus according to

claim 43, wherein, when a non three-dimensional video signal is output while an area storing a three-dimensional video signal is reproduced, the output section provides an output video signal with a display that the three-dimensional video signal is being reproduced.

47. An optical disk reproduction apparatus according to claim 38, wherein, when a non three-dimensional video signal is output while an area storing a three-dimensional video signal is reproduced, the output section provides an output video signal with a display that the three-dimensional video signal is being reproduced.

48. An optical disk reproduction apparatus according to claim 2, for receiving a compressed video stream obtained by compressing each of a plurality of video signals to be reproduced in synchronization and a plurality of compressed video signals obtained by multiplexing video reproduction time information indicating the time to reproduce the video signal and then performing extension and reproduction, the optical disk reproduction apparatus further comprising:

reference time signal generation means for generating a reference time signal; and  
a plurality of video extension reproduction means (16) for extending the compressed video stream and controlling the reproduction time of the video signal which has been extended in accordance with the difference between the reference time signal and the video reproduction time information,

wherein the reference time signals of the plurality of video extension reproduction means (16) are compensated for at substantially the same time using same information.

49. An optical disk reproduction apparatus according to claim 48, further comprising at least one audio signal extension reproduction means (32) for receiving a compressed audio stream obtained by compressing an audio signal to be reproduced in synchronization with the video signals and at least one compressed audio signal obtained by multiplexing audio reproduction time information (APTS) indicating the time to reproduce the audio signal, then extending the compressed audio stream, and outputting the audio reproduction time information,

wherein the reference time signal (STC) is compensated for by using the audio reproduction time information (APTS) output by the audio extension reproduction means.

50. An optical disk reproduction apparatus according to

claim 48, wherein at least one of the plurality of video extension reproduction means outputs video reproduction time information, and the reference time signal is compensated for by using the video reproduction time information output by at least one of the plurality of the video extension reproduction means.

51. An optical disk reproduction apparatus according to claim 48, wherein the video extension reproduction means skip-reproduce or repeat-reproduce a frame of the video signal to control the reproduction time.

52. An optical disk reproduction apparatus according to claim 48, wherein at least one of the plurality of the video extension reproduction means outputs a horizontal synchronization signal and a vertical synchronization signal of the video signal, thus to synchronize video reproduction performed by another video extension reproduction means to the horizontal synchronization signal and the vertical synchronization signal.

53. An optical disk having recorded thereon:

a first video stream corresponding to a first signal source, the first video stream being recorded on the disk as a plurality of first interleave units (6), each interleave unit including a plurality of frames (5) from the first video stream, a simultaneous second video stream corresponding to a second signal source, the second video stream being recorded on the disk as a plurality of second interleave units (8), each interleave unit including a plurality of frames (7) from the second video stream, first time information (VPTS) associated with the first video stream and related to reproduction timing of the first video stream, second time information (VPTS) associated with the second video stream and related to reproduction timing of the second video stream, in order to enable an output from a reproducing device substantially simultaneous with the first stream,

wherein the first and second interleave units are recorded in a prescribed order.

54. An optical disk according to claim 53, wherein:

a high resolution video signal includes a low resolution component and a high resolution component, the first video stream recorded on the optical disk represents the low resolution component, and the second video stream recorded on the opti-

cal disk represents the high resolution component.

55. An optical disk according to claim 54, wherein:

the low resolution component of the first video stream recorded on the optical disk is generated by a sum calculation of specific two or more signals of the high resolution signal, and the high resolution component of the second video stream recorded on the optical disk is generated by a difference calculation of specific two or more signals of the high resolution signal.

56. An optical disk according to claim 55, wherein the low resolution component of the first video stream recorded on the optical disk and the high resolution component of the second video stream recorded on the optical disk are generated as a result of division performed in a vertical direction by video signal division means.

57. An optical disk according to claim 56, wherein:

the first video stream has, in a  $2Q$ 'th line, a result of a first division calculation performed on a  $P$ 'th frame of an input video signal using video data of at least a  $2Q$ 'th line and a  $(2Q+1)$ 'th line of the input video signal, the second video stream has, in a  $2Q$ 'th line, a result of a second division calculation performed on a  $P$ 'th frame of the input video signal using video data of at least a  $2Q$ 'th line and a  $(2Q+1)$ 'th line of the input video signal, the first video stream has, in a  $(2Q+1)$ 'th line, a result of the first division calculation performed on a  $(P+1)$ 'th frame of the input video signal, the second video stream has, in a  $(2Q+1)$ 'th line, a result of the second division calculation performed on a  $(P+1)$ 'th frame of the input video signal, and  $P$  and  $Q$  are each an integer.

58. An optical disk according to claim 54, wherein the low resolution component of the first video stream recorded on the optical disk and the high resolution component of the second video stream recorded on the optical disk are generated as a result of division performed in a vertical direction by video signal division means.

59. An optical disk according to claim 54, wherein the first video stream recorded on the optical disk and the second video stream recorded on the optical disk are generated by dividing a high resolution video signal in a horizontal direction by video signal division means, so that the first video stream has a

horizontal low resolution component and the second video stream has horizontal high resolution component.

60. An optical disk according to claim 59, on which overlapping field or frame signals are recorded in a video signal in an abbreviated encoded state, and an identifier is recorded indicating the abbreviated field or frame signal. 5
61. An optical disk according to claim 54, on which identification information is recorded indicating a calculation parameter used for the division calculation for dividing a video signal. 10
62. An optical disk according to claim 54, wherein motion vector information of a video encoding signal of the first video stream and motion vector information of a video encoding signal of the second video stream have an identical value. 15
63. An optical disk according to claim 53, on which at least the first video stream and the second video stream are recorded while being encoded by a substantially identical signal format. 20
64. An optical disk according to claim 63, wherein the substantially identical signal format is obtained by encoding an NTSC, PAL or SECAM signal. 25
65. An optical disk according to claim 53, where interleave units corresponding to each of first through m'th streams are 1st through m'th interleave units, the optical disk has: 30
- first reproduction information including information for reproducing the first interleave unit but excluding information for reproducing the second interleave unit; 35
- second reproduction information including both information for reproducing the first interleave unit and information for reproducing the second interleave units; and 40
- an identifier for making the second reproduction information valid. 45
66. An optical disk according to claim 65, wherein reproduction information of one interleave unit includes leading position information of another interleave unit, wherein the another interleave unit belongs to the same stream as the one interleave unit and is the next closest interleave unit to the one interleave unit among interleave units having time information. 50
67. An optical disk according to claim 66, on which reproduction information of the first interleave unit in a first table is recorded as the first reproduction in- 55

formation, reproduction information of the first interleave unit and the second interleave unit in a second table is recorded as the second reproduction information, and an identifier is recorded indicating that the first table is valid.

68. An optical disk according to claim 67, on which a table for seamless reproduction is recorded as the first table, a table for non-seamless reproduction is recorded as the second table, and an identifier is recorded indicating the seamless reproduction.
69. An optical disk according to claim 53, wherein an encoded video signal for a right-eye signal of a three-dimensional video signal is used as at least the first video stream, and an encoded video signal for a left-eye signal of the three-dimensional video signal is used as at least the second video stream, an identifier being recorded on the optical disk indicating a recording area where the three-dimensional video signal is recorded.
70. An optical disk according to claim 53, wherein an encoded video signal for a low resolution component of a high resolution video signal is used as at least the first video stream, and an encoded video signal for a high resolution component of a high resolution video signal is used as at least the second video stream, an identifier being recorded on the optical disk indicating a recording area where the high resolution video signal is recorded.
71. An optical disc recording apparatus (2) for recording a prescribed signal on an optical disc, wherein the prescribed signal includes a first video stream corresponding to a first signal source, and a simultaneous second video stream corresponding to a second signal source, the apparatus comprising:
- means for recording the first video stream on the disk as a plurality of first interleave units (6), each interleave unit including a plurality of frames (5) from the first video stream;
- means for recording the second video stream on the disk as a plurality of second interleave units (8), each interleave unit including a plurality of frames (7) from the second video stream;
- means for recording first time information (VPTS) associated with the first video stream and related to reproduction timing of the first video stream, and
- means for recording second time information (VPTS) associated with the second video stream and related to reproduction timing of the second video stream, in order to enable an output from a reproducing device substantially simultaneous, with the first stream;

wherein the first and second interleave units are recorded in a prescribed order.

- 72.** An optical disk recording apparatus according to claim 71, further comprising video signal division means (38) for dividing a high resolution video signal into a low resolution component and a high resolution component, wherein:

the first video stream recorded on the optical disk represents the low resolution component, and  
the second video stream recorded on the optical disk represents the high resolution component.

- 73.** An optical disk recording apparatus according to claim 72, wherein the video signal division means (38) generates the low resolution component by a sum calculation of specific two or more signals of the high resolution video signal and generates the high resolution component by a difference calculation of specific two or more signals of the high resolution video signal.

- 74.** An optical disk recording apparatus according to claim 73, wherein the video signal division means (38) divides the video signal into a vertical low resolution component and a vertical high resolution component.

- 75.** An optical disk recording apparatus according to claim 74, wherein the video signal division means (38) locates:

a result of a first division calculation performed on a P'th frame of an input video signal using video data of at least a 2Q'th line and a (2Q+1)th line of the input video signal in a 2Q'th line of the first video stream,  
a result of a second division calculation performed on a P'th frame of the input video signal using video data of at least a 2Q'th line and a (2Q+1)th line of the input video signal in a 2Q'th line of the second video stream,  
a result of the first division calculation performed on a (P+1)th frame of the input video signal in a (2Q+1)th line of the first video stream, and  
a result of the second division calculation performed on a (P+1)th frame of the input video signal in a (2Q+1)th line of the second video stream,  
P and Q being each an integer.

- 76.** An optical disk recording apparatus according to claim 72, wherein the video signal division means divides the high resolution video signal into a verti-

cal low resolution component and a vertical high resolution component.

- 77.** An optical disk recording apparatus according to claim 72, wherein the video signal division means divides the high resolution video signal into the first video stream having a horizontal low resolution component and the second video stream having a horizontal high resolution component.

- 78.** An optical disk recording apparatus according to claim 77, wherein overlapping field or frame signals in a video signal are recorded in an abbreviated encoded state, and the optical disk recording apparatus records an identifier indicating the abbreviated field or frame signal.

- 79.** An optical disk recording apparatus according to claim 72, wherein the apparatus records identification information indicating a calculation parameter (144) used for the division calculation for dividing a video signal.

- 80.** An optical disk recording apparatus according to claim 72, wherein a motion vector detection section of a video encoding section uses a motion vector detection signal of one of the streams to encode the other stream.

- 81.** An optical disk recording apparatus according to claim 72, wherein at least the first video stream and the second video stream are encoded by a substantially identical signal format.

- 82.** An optical disk recording apparatus according to claim 81, wherein the substantially identical signal format is obtained by encoding an NTSC, PAL or SECAM signal.

- 83.** An optical disk recording apparatus according to claim 71, wherein interleave units corresponding to each of first through m'th streams are 1st through m'th interleave units, the optical disk recording apparatus records:

first reproduction information including information for reproducing the first interleave unit but excluding information for reproducing the second interleave unit;  
second reproduction information including both information for reproducing the first interleave unit and information for reproducing the second interleave units; and  
an identifier for making the second reproduction information valid.

- 84.** An optical disk recording apparatus according to claim 83, wherein reproduction information of one

interleave unit includes leading position information of another interleave unit, wherein the another interleave unit belongs to the same stream as the one interleave unit and is the next closest interleave unit to the one interleave unit among interleave units having time information. 5

85. An optical disk recording apparatus according to claim 84, wherein the apparatus records reproduction information of the first interleave unit in a first table as the first reproduction information, reproduction information of the first interleave unit and the second interleave unit in a second table as the second reproduction information, and an identifier indicating that the first table is valid. 10 15

86. An optical disk recording apparatus according to claim 85, which records a table for seamless reproduction as the first table, a table for non-seamless reproduction as the second table, and an identifier indicating the seamless reproduction. 20

87. An optical disk recording apparatus according to claim 71, wherein an encoded video signal for a right-eye signal of a three-dimensional video signal is used as at least the first video stream, and an encoded video signal for a left-eye signal of the three-dimensional video signal is used as at least the second video stream, an identifier being recorded on the optical disk indicating a recording area where the three-dimensional video signal is recorded. 25 30

88. An optical disk recording apparatus according to claim 71, wherein an encoded video signal for a low resolution component of a high resolution video signal is used as at least the first video stream, and an encoded video signal for a high resolution component of the high resolution video signal is used as at least the second video stream, an identifier being recorded on the optical disk indicating a recording area where the high resolution video signal is recorded. 35 40

89. An optical disk according to claim 70, having a result of a specific calculation of the identification information and disk attribute information inherent in a master disk of the optical disk or the optical disk. 45

50

## Patentansprüche

1. Vorrichtung zur Wiedergabe einer optischen Disk bzw. Speicherplatte zum Wiedergeben von Daten von einer optischen Disk, wobei die Daten auf der Disk enthalten: 55

einen ersten Videostrom entsprechend einer

ersten Signalquelle, wobei der erste Videostrom auf der Disk als eine Mehrzahl von ersten verschachtelten Einheiten (6) aufgezeichnet ist, jede verschachtelte Einheit enthält eine Mehrzahl von Vollbildern (frames) (5) aus dem ersten Videostrom, einen gleichzeitigen zweiten Videostrom entsprechend einer zweiten Signalquelle, wobei der zweite Videostrom auf der Disk als eine Mehrzahl von zweiten verschachtelten Einheiten (8) aufgezeichnet ist, wobei jede verschachtelte Einheit eine Mehrzahl von Vollbildern (7) von dem zweiten Videostrom enthält, eine erste Zeitinformation (VPTS), zugeordnet zu dem ersten Videostrom und bezogen auf den Wiedergabe-Zeitablauf des ersten Videostromes, eine zweite Zeitinformation (VPTS), zugeordnet zu dem zweiten Videostrom und bezogen auf den Wiedergabe-Zeitablauf des zweiten Videostroms, um eine Ausgabe im Wesentlichen gleichzeitig zu dem ersten Videostrom zu ermöglichen,

wobei die ersten und zweiten verschachtelten Einheiten in einer vorgegebenen Reihenfolge bzw. Ordnung aufgezeichnet sind; die Vorrichtung zur Wiedergabe der optischen Disk umfasst:

einen Wiedergabeabschnitt (24) zum Wiedergeben eines Signals, welches auf der optischen Disk aufgezeichnet ist;

einen Divisions- bzw. Teilungs-Abschnitt (25) zum Teilen des wiedergegebenen Signals in wiedergegebene erste verschachtelte Einheiten, welche den ersten Videostrom darstellen und wiedergegebene zweite verschachtelte Einheiten, welche den zweiten Videostrom darstellen;

einen Dekodier-Abschnitt (16) zum Dekodieren der ersten verschachtelten Einheiten und der zweiten verschachtelten Einheiten; und

einen Ausgabe-Abschnitt (29-31) zum Ausgeben einer dekodierten ersten verschachtelten Einheit und einer dekodierten zweiten verschachtelten Einheit, im Wesentlichen gleichzeitig mit einem Zeitablauf, welcher definiert ist durch die erste Zeitinformation für die erste verschachtelte Einheit und durch die zweite Zeitinformation für die zweite verschachtelte Einheit.

2. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 1, weiter aufweisend einen Synthese- bzw. Zusammensetzungs-Abschnitt (36; 90) zum Synthetisieren bzw. Zusammensetzen der dekodierten ersten verschachtelten Einheit und der

dekodierten zweiten verschachtelten Einheit.

3. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 2, wobei:

ein hochauflösendes Videosignal eine nieder-  
auflösende Komponente und eine hochauflö-  
sende Komponente enthält,  
der erste Videostrom stellt die niederauflösen-  
de Komponente dar,  
der zweite Videostrom stellt die hochauflösen-  
de Komponente dar, und  
der Synthese-Abschnitt (36; 90) synthetisiert  
bzw. setzt die dekodierte erste verschachtelte  
Einheit und die dekodierte zweite verschachtelte  
Einheit zusammen, um das hochauflösende  
Videosignal zu erzeugen.

4. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 2, wobei:

ein dreidimensionales Videosignal ein Signal  
für ein rechtes Auge und ein Signal für ein lin-  
kes Auge enthält,  
der erste Videostrom stellt das Signal für das  
rechte Auge dar,  
der zweite Videostrom stellt das Signal für das  
linke Auge dar, und  
der Synthese-Abschnitt (36; 90) synthetisiert  
die dekodierte erste verschachtelte Einheit und  
die dekodierte zweite verschachtelte Einheit,  
wodurch das dreidimensionale Videosignal er-  
zeugt wird.

5. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 2, wobei der Synthese-Abschnitt (90) eine vorgegebene erste Berechnung bei der ersten verschachtelten Einheit und der zweiten verschachtelten Einheit durchführt, eine vorgegebene zweite Berechnung bei der ersten verschachtelten Einheit und der zweiten verschachtelten Einheit durchführt, und ein Ergebnis der vorgegebenen ersten Berechnung und ein Ergebnis der vorgegebenen zweiten Berechnung synthetisiert bzw. zusammensetzt, wodurch ein Synthese-Signal erzeugt wird.

6. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 5, wobei die vorgegebene erste Berechnung eine Summen-Berechnung der ersten verschachtelten Einheit und der zweiten verschachtelten Einheit enthält, und die vorgegebene zweite Berechnung enthält eine Differenz-Berechnung der ersten verschachtelten Einheit und der zweiten verschachtelten Einheit.

7. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 6, wobei die erste Berechnung wei-

ter eine Berechnung zum Addieren eines ersten Wertes zu einem Ergebnis der Summen-Berechnung enthält, und die zweite Berechnung weiter eine Berechnung zum Addieren eines zweiten Wertes zu einem Ergebnis der Differenz-Berechnung enthält.

8. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 6, wobei der Synthese-Abschnitt das Ergebnis der ersten Berechnung den Bilddaten einer S-ten Zeile zuordnet und das Ergebnis der zweiten Berechnung den Bilddaten einer (S+1)-ten Zeile zuordnet, und S ist eine ganze Zahl.

9. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 8, zum Wiedergeben einer optischen Disk, welche erhalten wurde durch das Durchführen einer ersten Divisions-Berechnung und einer zweiten Divisions-Berechnung bei einem P-ten Vollbild bzw. Frame eines eingegebenen Videosignals unter Verwendung von Videodaten von mindestens einer 2Q-ten Zeile und einer (2Q+1)-ten Zeile des eingegebenen Videosignals, Lokalisieren eines Ergebnisses der ersten Divisions-Berechnung in einer 2Q-ten Zeile des ersten Videostroms, Lokalisieren eines Ergebnisses der zweiten Divisions-Berechnung in einer 2Q-ten Zeile des zweiten Videostroms, Durchführen der ersten Divisions-Berechnung und der zweiten Divisions-Berechnung bei einem (P+1)-ten Vollbild des eingegebenen Videosignals unter Verwendung von Videodaten von mindestens der 2Q-ten Zeile und der (2Q+1)-ten Zeile des eingegebenen Videosignals, Lokalisieren eines Ergebnisses der ersten Divisions-Berechnung in einer (2Q+1)-ten Zeile des ersten Videostroms und Lokalisieren eines Ergebnisses der zweiten Divisions-Berechnung in einer (2Q+1)-ten Zeile des zweiten Videostroms,

wobei der Synthese-Abschnitt die Summen-Berechnung und die Differenz-Berechnung eines Videosignals einer 2Q-ten oder einer 2(Q+1)-ten Zeile eines Dekodier-Signals des ersten Videostroms und eines Videosignals der 2Q-ten oder der (2Q+1)-ten Zeile des zweiten Videostroms durchführt, wodurch ein Synthese-Signal erzeugt wird, welches ein Ergebnis der Summen-Berechnung als ein Videosignal einer 2R-ten Zeile und ein Ergebnis der Differenz-Berechnung als ein Videosignal einer (2R+1)-ten Zeile hat; und R und Q sind jeweils ganze Zahlen, und R hat ein bestimmtes Verhältnis zu Q.

10. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 6, wobei der Synthese-Abschnitt ein Synthese-Signal erzeugt unter Verwendung einer Farbinformation des ersten Videostroms, aber ohne Verwendung einer Farbinformation des zweiten Videostroms.

11. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 6, wobei:

das hochauflösende Videosignal eine nieder-  
auflösende Komponente und eine hochauflö- 5  
sende Komponente enthält, und  
der Synthese-Abschnitt einen Parameter der  
Summen-Berechnung und der Differenz-Berechnung transformiert basierend auf einer Filter-Identifikations-Information, welche einen Divisions-Filter-Parameter der hochauflösenden Komponente und niederauflösenden Komponente darstellt. 10

12. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 5, wobei: 15

ein hochauflösendes Videosignal eine nieder-  
auflösende Komponente und eine hochauflö- 20  
sende Komponente enthält,  
der erste Videostrom stellt die niederauflösende Komponente dar,  
der zweite Videostrom stellt die hochauflösende Komponente dar, und  
der Synthese-Abschnitt erzeugt ein Synthese- 25  
Signal unter Verwendung einer Farbinformation des ersten Videostroms, aber ohne Verwendung der Farbinformation des zweiten Videostroms. 30

13. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 5, wobei:

ein hochauflösendes Videosignal eine nieder-  
auflösende und eine hochauflösende Kompo- 35  
nente enthält,  
der erste Videostrom stellt die niederauflösende Komponente dar,  
der zweite Videostrom stellt die hochauflösende Komponente dar, und 40

der Synthese-Abschnitt verändert einen Berechnungs-Parameter in Abhängigkeit von einer Divisions-Information, welche einen Divisions-Parameter darstellt, wenn das hochauflösende Signal getrennt ist von dem niederauflösenden Signal, wobei die Divisions-Information von der optischen Disk wiedergegeben bzw. gelesen wird. 45

14. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 13, wobei eine Filter-Konstante als der Berechnungs-Parameter verwendet wird. 50

15. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 5, wobei der Synthese-Abschnitt das Ergebnis der vorgegebenen ersten Berechnung und das Ergebnis der vorgegebenen ersten Berechnung und das Ergebnis der vorgegebenen 55

zweiten Berechnung in einer vertikalen Richtung synthetisiert bzw. zusammensetzt.

16. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 5, wobei der Synthese-Abschnitt das Ergebnis der vorgegebenen ersten Berechnung und das Ergebnis der vorgegebenen zweiten Berechnung in einer horizontalen Richtung synthetisiert bzw. zusammensetzt.

17. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 5, wobei der Synthese-Abschnitt das Synthese-Signal in ein fortschreitendes (progressive) Signal transformiert.

18. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 2, wobei der Dekodier-Abschnitt eine Dekodierung durchführt unter Verwendung eines Bewegungs-Kompensations-Signals des ersten Videostroms als ein Bewegungs-Kompensations-Signal des zweiten Videostroms.

19. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 2, weiter aufweisend eine Video-Identifikations-Vorrichtung zum Identifizieren einer Identifikations-Information (61), welche anzeigt, dass ein hochauflösendes Videosignal oder ein dreidimensionales Videosignal aufgezeichnet sind, wobei:

wenn die Video-Identifikations-Vorrichtung die Identifikations-Information (61) identifiziert, gibt die Vorrichtung zur Wiedergabe einer optischen Disk (24) optional beide, die erste verschachtelte Einheit und die zweite verschachtelte Einheit wieder, und  
der Dekodier-Abschnitt (16) und der Synthese-Abschnitt (36; 90) dekodieren und synthetisieren jeweils das hochauflösende Videosignal und/oder das dreidimensionale Videosignal.

20. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 19, wobei wenn die Video-Identifikations-Vorrichtung die Identifikations-Information nicht wiedergibt, gibt die Vorrichtung zur Wiedergabe einer optischen Disk optional nur die erste verschachtelte Einheit wieder.

21. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 20, wobei wenn die Video-Identifikations-Vorrichtung die Identifikations-Information nicht wiedergibt, gibt die Vorrichtung zur Wiedergabe der optischen Disk optional nur die erste verschachtelte Einheit wieder und gibt die erste verschachtelte Einheit aus, wobei die Anzahl der Abtast (scanning)-Zeilen der ersten Signalquelle erhöht ist.

22. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 1, zum Wiedergeben einer optischen Disk mit einer ersten Wiedergabe-Information, welche anzeigt, dass eine Information zum Wiedergeben der ersten verschachtelten Einheit vorliegt und eine Information zum Wiedergeben der zweiten verschachtelten Einheit fehlt, einer zweiten Wiedergabe-Information, welche anzeigt, dass eine Information zum Wiedergeben der ersten verschachtelten Einheit und eine Information zum Wiedergeben der zweiten verschachtelten Einheit beide vorliegen, einer Identifikations-Information, welche anzeigt, dass die erste Wiedergabe-Information gültig ist, und eine hochauflösende Videosignal/dreidimensionale Videosignal Aufzeichnungs-Identifikations-Information, welche anzeigt, dass ein hochauflösendes oder ein dreidimensionales Videosignal unterteilt ist in den ersten Videostrom und den zweiten Videostrom, wobei wenn die hochauflösende Videosignal/dreidimensionale Videosignal-Aufzeichnungs-Identifikations-Information erkannt wird, gibt die Vorrichtung zur Wiedergabe der optischen Disk optional beide wieder, die erste verschachtelte Einheit und die zweite verschachtelte Einheit in Abhängigkeit von der zweiten Wiedergabe-Information.
23. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 22, wobei die Vorrichtung zur Wiedergabe der optischen Disk die zweite Wiedergabe-Information wiedergibt, um eine Start-Positions-Information einer unmittelbar nachfolgenden verschachtelten Einheit einer bestimmten verschachtelten Einheit in jedem Videostrom zu erhalten, und gibt demzufolge beides wieder, die erste verschachtelte Einheit und die zweite verschachtelte Einheit.
24. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 22, wobei wenn die hochauflösende Videosignal/dreidimensionale Videosignal Aufzeichnungs-Identifikations-Information nicht erkannt wird, gibt die Vorrichtung zur Wiedergabe einer optischen Disk die erste verschachtelte Einheit in Abhängigkeit von der ersten Wiedergabe-Information wieder.
25. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 1, wobei die optische Disk n Teile von Videoströmen jeweils entsprechend n teilen von Signalquellen speichert, und die Vorrichtung zur Wiedergabe einer optischen Disk weist weiterhin einen Auswahl-Abschnitt auf zum Auswählen von i Teilen von Videoströmen einschließlich des ersten Videostroms und des zweiten Videostroms aus den n Teilen der Videoströme und n und i sind jeweils ganze Zahlen von 2 oder mehr.
26. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 25, wobei der Divisions-Abschnitt einen Puffer-Abschnitt enthält zum Puffern der i Teile der Videoströme und der Puffer-Abschnitt hat eine Gesamtkapazität von  $1102 \times (i-1)$  kbyte oder mehr.
27. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 26, wobei  $i=2$ .
28. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 1, wobei mindestens der erste Videostrom und der zweite Videostrom gleichzeitig dekodiert werden, und ein Ein-Bildschirm (one-screen) Videosignal, bei welchem der erste Videostrom auf einem ersten Bereich lokalisiert ist und der zweite Videostrom auf einem zweiten Bereich lokalisiert ist, wird ausgegeben.
29. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 28, wobei der erste Bereich und der zweite Bereich in einer horizontalen Richtung voneinander verschieden sind.
30. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 29, wobei der Synthese-Abschnitt einen Zeilen-Speicher (28c) enthält.
31. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 28, wobei eine Information, welche auf dem ersten Bereich angezeigt ist, vergrößert wird, oder verkleinert wird in Abhängigkeit von einem extern eingegebenen Anweisungssignal.
32. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 31, wobei der Synthese-Abschnitt einen Vollbild (frame)-Speicher enthält.
33. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 31, wobei der erste Bereich vergrößert und der zweite Bereich verkleinert ist bzw. wird in Abhängigkeit von einem extern eingegebenen Anweisungs-Signal.
34. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 28, wobei ein Teil- bzw. Unter-Bild (sub picture) von jedem, dem ersten Videostrom und dem zweiten Videostrom, angezeigt wird.
35. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 28, wobei ein Vollbild-Speicher (28d) verwendet wird, um kontinuierlich den ersten Videostrom auf dem ersten Bereich anzuzeigen, n Teile der Anzeigebereiche sind vorgesehen, um unterbrochen bzw. diskontinuierlich einen n-ten Strom in einem n-ten Bereich anzuzeigen, und n ist eine ganze Zahl von eins oder mehr.



36. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 28, wobei nur ein Audio-Signal des ersten Videostroms ausgegeben wird.
37. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 28, wobei ein Audio-Signal des ersten Videostroms und ein Audio-Signal des zweiten Videostroms ausgegeben werden und der Audio-Pegel des zweiten Videostroms wird abgesenkt bzw. verringert.
38. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 1, wobei der Ausgabe-Abschnitt den ersten Videostrom als ein Signal für das rechte Auge und den zweiten Videostrom als ein Signal für das linke Auge ausgibt.
39. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 38, wobei der Ausgabe-Abschnitt den ersten Videostrom an einen Videoausgabe-Abschnitt für ein rechtes Auge und den zweiten Videostrom an einen Videoausgabe-Abschnitt für ein linkes Auge ausgibt.
40. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 39, wobei der Ausgabe-Abschnitt ein Synchronisations-Signal für Dreidimensional-Brillen ausgibt, wobei das Synchronisations-Signal ein Identifikations-Signal des Signals für das linke Auge und das Signals für das rechte Auge enthält.
41. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 39, wobei der Ausgabe-Abschnitt das dreidimensionale Video nur ausgibt, wenn eine Anweisung zur Ausgabe eines dreidimensionalen Videos ausgegeben ist.
42. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 39, wobei der Ausgabe-Abschnitt eine Anzeige an einen Anzeige-Abschnitt ausgibt, dass das dreidimensionale Videosignal wiedergegeben wird, während ein Bereich, welcher das dreidimensionale Videosignal speichert, wiedergegeben wird.
43. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 38, wobei der Ausgabe-Abschnitt einen Misch-Synthese-Abschnitt aufweist zum Synchronisieren der Zeit-Information des ersten Videostroms und der Zeit-Information des zweiten Videostroms, die ersten und zweiten Videoströme auf einer Halbbild (field)-für-Halbbild-Basis oder einer Vollbild (frame)-für-Vollbild-Basis mischt, und die ersten und zweiten Videoströme alternieren bzw. abwechselnd ausgibt.
44. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 43, wobei der Ausgabe-Abschnitt einen Dreidimensional-Schalt-Signal-Abschnitt (20) enthält zum Ausgeben eines Signals zum Schalten des Signals für das linke Auge und des Signals für das rechte Auge.
45. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 43, wobei der Misch-Synthese-Abschnitt identifiziert bzw. bestimmt, dass das Signal ein dreidimensionales Videosignal ist und den ersten Videostrom und den zweiten Videostrom nur mischt, wenn eine Anweisung zur Ausgabe eines dreidimensionalen Videos ausgegeben ist.
46. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 43, wobei wenn ein nicht-dreidimensionales Videosignal ausgegeben wird, während ein Bereich, welcher ein dreidimensionales Videosignal speichert, wiedergegeben wird, liefert der Ausgabe-Abschnitt ein Ausgabe-Videosignal mit einer Anzeige, dass das dreidimensionale Videosignal wiedergegeben wird.
47. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 38, wobei wenn ein nicht-dreidimensionales Videosignal ausgegeben wird, während ein Bereich, welcher ein dreidimensionales Videosignal speichert, wiedergegeben wird, liefert der Ausgabe-Abschnitt ein Ausgabe-Videosignal mit einer Anzeige, dass das dreidimensionale Videosignal wiedergegeben wird.
48. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 2, zum Empfangen eines komprimierten Videostroms, welcher erhalten wurde durch Komprimieren von jedem einer Mehrzahl von Videosignalen, welche in Synchronisation wiedergegeben werden sollen und einer Mehrzahl von komprimierten Videosignalen, welche erhalten wurden durch Multiplexen einer Video-Wiedergabe-Zeit-Information, welche die Zeit anzeigt, um das Videosignal wiederzugeben und dann Durchführen einer Erweiterung bzw. Ausdehnung (extension) und Wiedergabe, wobei die Vorrichtung zur Wiedergabe der optischen Disk weiter aufweist:
- eine Vorrichtung zur Erzeugung eines Referenz-Zeit-Signals zum Erzeugen eines Referenz-Zeit-Signals; und
- eine Mehrzahl von Video-Erweiterungs-Wiedergabe-Vorrichtungen (16) zum Erweitern des komprimierten Videostroms und zum Steuern der Wiedergabe-Zeit des Videosignals, welches erweitert wurde in Abhängigkeit von der Differenz zwischen dem Referenz-Zeit-Signal und der Video-Wiedergabe-Zeit-Information,
- wobei die Referenz-Zeit-Signale der Mehr-

zahl der Video-Erweiterungs-Wiedergabe-Vorrichtungen (16) kompensiert sind bzw. werden für im Wesentlichen die gleiche Zeit unter Verwendung der gleichen Information.

49. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 48, weiter aufweisend mindestens eine Audio-Signal-Erweiterungs-Wiedergabe-Vorrichtung (32) zum Empfangen eines komprimierten Audiostroms, erhalten durch Komprimieren eines Audio-Signals, welches Wiedergegeben werden soll in Synchronisation zu den Videosignalen und mindestens eines komprimierten Audio-Signals, welches erhalten wurde durch Multiplexen einer Audio-Wiedergabe-Zeit-Information (APTS), welche die Zeit angibt, um das Audio-Signal wiederzugeben, dann Erweitern des komprimierten Audiostroms, und Ausgeben der Audio-Wiedergabe-Zeit-Information  
wobei das Referenz-Zeit-Signal (STC) kompensiert ist bzw. wird unter Verwendung der Audio-Wiedergabe-Zeit-Information (APTS), ausgegeben von der Audio-Erweiterungs-Wiedergabe-Vorrichtung.
50. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 48, wobei mindestens eine der Mehrzahl der Video-Erweiterungs-Wiedergabe-Vorrichtungen die Video-Wiedergabe-Zeit-Information ausgibt, und das Referenzzeit-Signal wird kompensiert unter Verwendung der Video-Wiedergabe-Zeit-Information, ausgegeben durch mindestens eine der Mehrzahl der Video-Erweiterungs-Wiedergabe-Vorrichtungen.
51. Vorrichtung zum Wiedergeben einer optischen Disk nach Anspruch 48, wobei die Video-Erweiterungs-Wiedergabe-Vorrichtung ein Vollbild des Videosignals mit Springen wiedergibt (skip-reproduce) oder wiederholt wiedergibt (repeat-reproduce), um die Wiedergabe-Zeit zu steuern
52. Vorrichtung zur Wiedergabe einer optischen Disk nach Anspruch 48, wobei mindestens eine der Mehrzahl der Videoerweiterungswiedergabevorrichtungen ein horizontales Synchronisationssignal und ein vertikales Synchronisationssignal des Videosignals ausgibt, um so die Videowiedergabe zu synchronisieren, welche durchgerührt wird von einer anderen Videoerweiterungswiedergabevorrichtung, mit dem horizontalen Synchronisationssignal und dem vertikalen Synchronisationssignal.
53. Optische Disk auf welcher aufgezeichnet ist:  
ein erster Videostrom entsprechend einer ersten Signalquelle, wobei der erste Videostrom auf der Disk als eine Mehrzahl von ersten ver-

schachtelten Einheiten (6) aufgezeichnet ist, wobei jede verschachtelte (interleave) Einheit eine Mehrzahl von Vollbildern (5) von dem ersten Videostrom enthält,  
ein gleichzeitiger zweiter Videostrom entsprechend einer zweiten Signalquelle, wobei der zweite Videostrom auf der Disk aufgezeichnet ist als eine Mehrzahl von zweiten verschachtelten Einheiten (8), wobei jede verschachtelte Einheit eine Mehrzahl von Vollbildern (7) von dem zweiten Videostrom enthält,  
eine erste Zeitinformation (VPTS) zugeordnet zu dem ersten Videostrom und bezogen auf den Wiedergabe-Zeitablauf des ersten Videostroms,  
eine zweite Zeitinformation (VPTS) zugeordnet zu dem zweiten Videostrom und bezogen auf den Wiedergabe-Zeitablauf des zweiten Videostroms, um eine Ausgabe von einer Wiedergabevorrichtung im Wesentlich gleichzeitig zu dem ersten Strom zu ermöglichen,

wobei die ersten und zweiten verschachtelten Einheiten in einer vorgegebenen Reihenfolge aufgezeichnet sind.

54. Optische Disk nach Anspruch 53, wobei:

ein hochauflösendes Videosignal eine nieder-auflösende Komponente und eine hochauflösende Komponente enthält,  
der erste Videostrom, welcher auf der optischen Disk aufgezeichnet ist, stellt die nieder-auflösende Komponente dar, und  
der zweite Videostrom, welcher auf der optischen Disk aufgezeichnet ist, stellt die hoch-auflösende Komponente dar.

55. Optische Disk nach Anspruch 54, wobei:

die niederauflösende Komponente des ersten Videostroms, welche auf der optischen Disk aufgezeichnet ist, wird erzeugt durch eine Summen-Berechnung von spezifischen zwei oder mehr Signalen des hochauflösenden Signals, und  
die hochauflösende Komponente des zweiten Videostroms, welche auf der optischen Disk aufgezeichnet ist, wird erzeugt durch eine Differenz-Berechnung von spezifischen zwei oder mehr Signalen des hochauflösenden Signals.

56. Optische Disk nach Anspruch 55, wobei die niederauflösende Komponente des ersten Videostroms, aufgezeichnet auf der optischen Disk und die hochauflösende Komponente des zweiten Videostroms, aufgezeichnet auf der optischen Disk, erzeugt werden als ein Ergebnis einer Division durchgeführt in

einer vertikalen Richtung durch eine Videosignal-Divisions-Vorrichtung.

**57.** Optische Disk nach Anspruch 56, wobei:

der erste Videostrom in einer 2Q-ten Zeile ein Ergebnis einer ersten Divisions-Berechnung hat, durchgeführt bei einem P-ten Vollbild eines eingegebenen Videosignals unter Verwendung von Videodaten von mindestens einer 2Q-ten Zeile und einer (2Q+1)-ten Zeile des eingegebenen Videosignals,  
 der zweite Videostrom hat in einer 2Q-ten Zeile ein Ergebnis einer zweiten Divisions-Berechnung, durchgeführt bei einem P-ten Vollbild des eingegebenen Videosignals unter Verwendung von Videodaten von mindestens einer 2Q-ten Zeile und einer (2Q+1)-ten Zeile des eingegebenen Videosignals,  
 der erste Videostrom hat in einer (2Q+1)-ten Zeile ein Ergebnis der ersten Divisions-Berechnung, durchgeführt bei einem (P+1)-ten Vollbild des eingegebenen Videosignals,  
 der zweite Videostrom hat in einer (2Q+1)-ten Zeile ein Ergebnis der zweiten Divisions-Berechnung, durchgeführt bei einem (P+1)-ten Vollbild des eingegebenen Videosignals, und  
 P und Q sind jeweils ganze Zahlen.

**58.** Optische Disk nach Anspruch 54, wobei die nieder-auflösende Komponente des ersten Videostroms, aufgezeichnet auf der optischen Disk und die hoch-auflösende Komponente des zweiten Videostroms, aufgezeichnet auf der optischen Disk, erzeugt werden als ein Ergebnis einer Division, durchgeführt in einer vertikalen Richtung durch die Videosignal-Divisions-Vorrichtung.

**59.** Optische Disk nach Anspruch 54, wobei der erste Videostrom, aufgezeichnet auf der optischen Disk und der zweite Videostrom, aufgezeichnet auf der optischen Disk, erzeugt werden durch Dividieren bzw. Teilen eines hochauflösenden Videosignals in einer horizontalen Richtung durch eine Videosignal-Divisions-Vorrichtung, so dass der erste Videostrom eine horizontale niederauflösende Komponente hat und der zweite Videostrom eine horizontale hochauflösende Komponente hat.

**60.** Optische Disk nach Anspruch 59, auf welcher überlappende Halbbild (field) oder Vollbild (frame)-Signale aufgezeichnet sind in einem Videosignal in einem abgekürzten kodierten Zustand, und eine Kennung (identifier) ist aufgezeichnet, welche das abgekürzte Halbbild- oder Vollbild-Signal bezeichnet.

**61.** Optische Disk nach Anspruch 54, auf welcher eine Identifikationsinformation aufgezeichnet ist, welche

einen Berechnungs-Parameter angibt, verwendet für die Divisions-Berechnung zum Dividieren bzw. Teilen eines Videosignals.

**62.** Optische Disk nach Anspruch 54, wobei eine Bewegungsvektor-Information eines Videokodiersignals des ersten Videostroms und eine Bewegungsvektor-Information eines Videokodiersignals des zweiten Videostroms einen identischen Wert haben.

**63.** Optische Disk nach Anspruch 53, auf welcher mindestens der erste Videostrom und der zweite Videostrom aufgezeichnet sind, während diese durch ein im Wesentlichen identisches SignalfORMAT kodiert sind.

**64.** Optische Disk nach Anspruch 63, wobei das im Wesentlichen identische SignalfORMAT erhalten wird durch Kodieren eines NTSC, PAL oder SECAM Signals.

**65.** Optische Disk nach Anspruch 53, wobei verschachtelte Einheiten entsprechend einem jeden der ersten bis m-ten Ströme erste bis m-te verschachtelte Einheiten sind, die optische Disk hat:

eine erste Wiedergabeinformation einschließlich einer Information zum Wiedergeben der ersten verschachtelten Einheit, aber ohne eine Information zum Wiedergeben der zweiten verschachtelten Einheit;  
 eine zweite Wiedergabeinformation einschließlich beider, einer Information zum Wiedergeben der ersten verschachtelten Einheit und einer Information zum Wiedergeben der zweiten verschachtelten Einheiten; und  
 eine Kennung, damit die zweite Wiedergabeinformation gültig gemacht wird.

**66.** Optische Disk nach Anspruch 65, wobei die Wiedergabeinformation einer verschachtelten Einheit eine vordere (leading) Positionsinformation einer anderen verschachtelten Einheit enthält, wobei die andere verschachtelte Einheit zu dem gleichen Strom gehört, wie die eine verschachtelte Einheit und die nächste naheliegendste verschachtelte Einheit zu der einen verschachtelten Einheit unter den verschachtelten Einheiten mit einer Zeitinformation ist.

**67.** Optische Disk nach Anspruch 66, auf welcher eine Wiedergabeinformation der ersten verschachtelten Einheit in einer ersten Tabelle aufgezeichnet ist als die erste Wiedergabeinformation, eine Wiedergabeinformation der ersten verschachtelten Einheit und der zweiten verschachtelten Einheit in einer zweiten Tabelle ist aufgezeichnet als die zweite

Wiedergabeinformation und eine Kennung ist aufgezeichnet, welche angibt, dass die erste Tabelle gültig ist.

68. Optische Disk nach Anspruch 67, auf welcher eine Tabelle für eine nahtlose Wiedergabe aufgezeichnet ist als die erste Tabelle, eine Tabelle für eine nicht-nahtlose Wiedergabe aufgezeichnet ist als die zweite Tabelle, und eine Kennung aufgezeichnet ist, welche die nahtlose Wiedergabe anzeigt.

69. Optische Disk nach Anspruch 53, wobei ein kodiertes Videosignal für ein Signal für das rechte Auge eines dreidimensionalen Videosignals verwendet wird als mindestens der erste Videostrom, und ein kodiertes Videosignal für ein Signal für das linke Auge des dreidimensionalen Videosignals verwendet wird als mindestens der zweite Videostrom, wobei eine Kennung auf der optischen Disk aufgezeichnet ist, welche einen Aufzeichnungsbereich angibt, wo das dreidimensionale Videosignal aufgezeichnet ist.

70. Optische Disk nach Anspruch 53, wobei ein kodiertes Videosignal für eine niederauflösende Komponente eines hochauflösenden Videosignals verwendet wird als mindestens der erste Videostrom, und ein kodiertes Videosignal für eine hochauflösende Komponente eines hochauflösenden Videosignals wird verwendet als mindestens der zweite Videostrom, wobei eine Kennung auf der optischen Disk aufgezeichnet ist, welche einen Aufzeichnungsbereich angibt, wo das hochauflösende Videosignal aufgezeichnet ist.

71. Vorrichtung (2) zum Aufzeichnen einer optischen Disk, zum Aufzeichnen eines vorgegebenen Signals auf einer optischen Disk, wobei das vorgegebene Signal einen ersten Videostrom enthält, entsprechend einer ersten Signalquelle, und einen gleichzeitigen zweiten Videostrom entsprechend einer zweiten Signalquelle, wobei die Vorrichtung aufweist:

eine Vorrichtung zum Aufzeichnen des ersten Videostroms auf der Disk als eine Mehrzahl von ersten verschachtelten Einheiten (6), wobei jede verschachtelte Einheit eine Mehrzahl von Vollbildern (5) von dem ersten Videostrom enthält;

eine Vorrichtung zum Aufzeichnen des zweiten Videostroms auf der Disk als eine Mehrzahl von zweiten verschachtelten Einheiten (8), wobei jede verschachtelte Einheit eine Mehrzahl von Vollbildern (7) von dem zweiten Videostrom enthält;

eine Vorrichtung zum Aufzeichnen einer ersten Zeitinformation (VPTS), zugeordnet zu dem er-

sten Videostrom und bezogen auf den Wiedergabe-Zeitablauf des ersten Videostroms, und eine Vorrichtung zum Aufzeichnen einer zweiten Zeitinformation (VPTS), zugeordnet zu dem zweiten Videostrom und bezogen auf den Wiedergabezeitablauf des zweiten Videostroms, um zu ermöglichen, dass eine Ausgabe von einer Wiedergabevorrichtung im Wesentlichen gleichzeitig zu dem ersten Strom ist;

wobei die ersten und zweiten verschachtelten Einheiten in einer vorgegebenen Reichenfolge aufgezeichnet sind.

72. Vorrichtung zur Aufzeichnung einer optischen Disk nach Anspruch 71, weiter aufweisend eine Videosignaldivisionsvorrichtung (38) zum Dividieren bzw. Teilen eines hochauflösenden Videosignals in eine niederauflösende Komponente und eine hochauflösende Komponente, wobei:

der erste Videostrom, welcher auf der optischen Disk aufgezeichnet ist, die niederauflösende Komponente darstellt, und der zweite Videostrom, welcher auf der optischen Disk aufgezeichnet ist, die hochauflösende Komponente darstellt.

73. Vorrichtung zum Aufzeichnen einer optischen Disk nach Anspruch 72, wobei die Videosignaldivisionsvorrichtung (38) die niederauflösende Komponente durch eine Summen-Berechnung von spezifischen zwei oder mehr Signalen des hochauflösenden Videosignals erzeugt und die hochauflösende Komponente durch eine Differenz-Berechnung von spezifischen zwei oder mehr Signalen des hochauflösenden Videosignals erzeugt.

74. Vorrichtung zum Aufzeichnen einer optischen Disk nach Anspruch 73, wobei die Videosignaldivisionsvorrichtung (38) das Videosignal in eine vertikale niederauflösende Komponente und eine vertikale hochauflösende Komponente teilt.

75. Vorrichtung zum Aufzeichnen einer optischen Disk nach Anspruch 74, wobei die Videosignaldivisionsvorrichtung (31) lokalisiert bzw. anordnet:

ein Ergebnis einer ersten Divisions-Berechnung, durchgeführt bei einem P-ten Vollbild eines eingegebenen Videosignals unter Verwendung von Videodaten von mindestens einer 2Q-ten Zeile und einer (2Q+1)-ten Zeile des eingegebenen Videosignals in einer 2Q-ten Zeile des ersten Videostroms, ein Ergebnis einer zweiten Divisions-Berechnung, durchgeführt bei einem P-ten Vollbild des eingegebenen Videosignals unter Verwendung

von Videodaten von mindestens einer 2Q-ten Zeile und einer (2Q+1)-ten Zeile des eingegebenen Videosignals, in einer 2Q-ten Zeile des zweiten Videostroms,

ein Ergebnis der ersten Divisions-Berechnung, durchgeführt bei einem (P+1)-ten Vollbild des eingegebenen Videosignals in einer (2Q+1)-ten Zeile des ersten Videostroms, und,  
ein Ergebnis der zweiten Divisions-Berechnung, durchgeführt bei einem (P+1)-ten Vollbild des eingegebenen Videosignals in einer (2Q + 1)4en Zeile des zweiten Videostroms,  
P und Q sind jeweils ganze Zahlen.

76. Vorrichtung zum Aufzeichnen einer optischen Disk nach Anspruch 72, wobei die Videosignaldivisionsvorrichtung das hochauflösende Videosignals in eine vertikale niederauflösende Komponente und eine vertikale hochauflösende Komponente teilt.
77. Vorrichtung zur Aufzeichnung einer optischen Disk nach Anspruch 72, wobei die Videosignaldivisionsvorrichtung das hochauflösende Videosignal in den ersten Videostrom mit einer horizontalen niederauflösenden Komponente und den zweiten Videostrom einer horizontalen hochauflösenden Komponente teilt.
78. Vorrichtung zur Aufzeichnung einer optischen Disk nach Anspruch 77, wobei überlappende Halbbild- oder Vollbild-Signale in einem Videosignal aufgezeichnet sind in einem abgekürzten kodierten Zustand, und die Vorrichtung zur Aufzeichnung einer optischen Disk zeichnet eine Kennung (identifiziert) auf, welche das abgekürzte Halbbild- oder Vollbild-Signal bezeichnet.
79. Vorrichtung zur Aufzeichnung einer optischen Disk nach Anspruch 72, wobei die Vorrichtung eine Identifikationsinformation aufzeichnet, welche einen Berechnungs-Parameter (144) angibt, welcher verwendet wird für die Divisions-Berechnung zum Dividieren bzw. Teilen eines Videosignals.
80. Vorrichtung zur Aufzeichnung einer optischen Disk nach Anspruch 72, wobei ein Abschnitt zum Erkennen eines Bewegungsvektors eines Videokodierabschnitts ein Bewegungsvektorerkennungssignal von einem der Ströme verwendet, um den anderen Strom zu kodieren.
81. Vorrichtung zur Aufzeichnung einer optischen Disk nach Anspruch 72, wobei mindestens der erste Videostrom und der zweite Videostrom kodiert sind durch ein im Wesentlichen identisches SignalfORMAT.
82. Vorrichtung zum Aufzeichnen einer optischen Disk

nach Anspruch 81, wobei das im Wesentliche identische SignalfORMAT erhalten wird durch Kodieren eines NTSC, PAL oder SECAM Signals.

83. Vorrichtung zur Aufzeichnung einer optischen Disk nach Anspruch 71, wobei verschachtelte Einheiten entsprechend einem jeden der ersten bis m-ten Ströme erste bis m-te verschachtelte Einheiten sind, wobei die Vorrichtung zur Aufzeichnung der optischen Disk aufzeichnet:

eine erste Wiedergabeinformation einschließlich einer Information zum Wiedergeben der ersten verschachtelten Einheit, aber ohne eine Information zum Wiedergeben der zweiten verschachtelten Einheit;  
eine zweite Wiedergabeinformation einschließlich beider, einer Information zum Wiedergeben der ersten verschachtelten Einheit und einer Information zum Wiedergeben der zweiten verschachtelten Einheiten; und  
eine Kennung (identifiziert), damit die zweite Wiedergabeinformation gültig gemacht wird.

84. Vorrichtung zur Aufzeichnung einer optischen Disk nach Anspruch 83, wobei die Wiedergabeinformation einer verschachtelten Einheit eine vordere (leading) Positionsinformation einer anderen verschachtelten Einheit enthält, wobei die andere verschachtelte Einheit zu dem gleichen Strom gehört, wie die eine verschachtelte Einheit und die nächste naheliegendste verschachtelte Einheit zu der einen verschachtelten Einheit unter den verschachtelten Einheiten mit einer Zeitinformation ist.

85. Vorrichtung zur Aufzeichnung einer optischen Disk nach Anspruch 84, wobei die Vorrichtung eine Wiedergabeinformation der ersten verschachtelten Einheit in einer ersten Tabelle als die erste Wiedergabeinformation aufzeichnet, eine Wiedergabeinformation der ersten verschachtelten Einheit und der zweiten verschachtelten Einheit in einer zweiten Tabelle als die zweite Wiedergabeinformation aufzeichnet, und eine Kennung, welche angibt, dass die erste Tabelle gültig ist.

86. Vorrichtung zum Aufzeichnen einer optischen Disk nach Anspruch 85, welche eine Tabelle zur nahtlosen Wiedergabe als die erste Tabelle, eine Tabelle zur nichtnahtlosen Wiedergabe als zweite Tabelle, und eine Kennung, welche die nahtlose Wiedergabe angibt, aufzeichnet.

87. Vorrichtung zum Aufzeichnen einer optischen Disk nach Anspruch 71, wobei ein kodiertes Videosignal für ein Signal für das rechte Auge eines dreidimensionalen Videosignals verwendet wird als mindestens der erste Videostrom, und ein kodiertes Vide-

osignal für ein Signal für das linke Auge des dreidimensionalen Videosignals verwendet wird als mindestens der zweite Videostrom, eine Kennung wird aufgezeichnet auf der optischen Disk, welche einen Aufzeichnungsbereich angibt, wo das dreidimensionale Videosignal aufgezeichnet ist. 5

88. Vorrichtung zum Aufzeichnen einer optischen Disk nach Anspruch 71, wobei ein kodiertes Videosignal für eine niederauflösende Komponente eines hochauflösenden Videosignals verwendet wird als mindestens der erste Videostrom, und ein kodiertes Videosignal für eine hochauflösende Komponente des hochauflösenden Videosignals wird verwendet als mindestens der zweite Videostrom, eine Kennung ist bzw. wird aufgezeichnet auf der optischen Disk, welche einen Aufzeichnungsbereich angibt, wo das hochauflösende Videosignal aufgezeichnet ist. 10 15 20
89. Optische Disk nach Anspruch 70 mit einem Ergebnis einer bestimmten Berechnung der Identifikations-Information und einer Disk-Attribut-Information, welche einer Master-Disk der optischen Disk oder der optischen Disk innewohnt. 25

## Revendications

1. Appareil de reproduction de disque optique destiné à reproduire des données à partir d'un disque optique, dans lequel les données sur le disque comprennent :
- un premier flux vidéo correspondant à une première source de signal, le premier flux vidéo étant enregistré sur le disque sous forme d'une pluralité de premières unités d'entrelacement (6), chaque unité d'entrelacement comprenant une pluralité de trames (5) provenant du premier flux vidéo, 30 40
- un second flux vidéo simultané correspondant à une seconde source de signal, le second flux vidéo étant enregistré sur le disque sous forme d'une pluralité de secondes unités d'entrelacement (8), chaque unité d'entrelacement comprenant une pluralité de trames (7) provenant du second flux vidéo, 45
- des premières informations de temps (VPTS) associées au premier flux vidéo et liées au cadencement de reproduction du premier flux vidéo, 50
- des secondes informations de temps (VPTS) associées au second flux vidéo et liées au cadencement de reproduction du second flux vidéo de manière à permettre une sortie sensiblement simultanée avec le premier flux, 55

dans lequel les première et seconde unités d'entrelacement sont enregistrées dans un ordre prescrit, l'appareil de reproduction de disque optique comprenant :

une section de reproduction (24) destinée à reproduire un signal enregistré sur le disque optique,

une section de division (25) destinée à diviser le signal reproduit en des premières unités d'entrelacement reproduites représentant le premier flux vidéo, et en des secondes unités d'entrelacement reproduites représentant le second flux vidéo,

une section de décodage (16) destinée à décodifier les premières unités d'entrelacement et les secondes unités d'entrelacement, et

une section de sortie (29 à 31) destinée à fournir en sortie une première unité d'entrelacement décodée et une seconde unité d'entrelacement décodée sensiblement simultanément suivant un cadencement défini par les premières informations de temps pour la première unité d'entrelacement et par les secondes informations de temps pour la seconde unité d'entrelacement.

2. Appareil de reproduction de disque optique selon la revendication 1, comprenant en outre une section de synthèse (36 ; 90) destinée à synthétiser la première unité d'entrelacement décodée et la seconde unité d'entrelacement décodée.

3. Appareil de reproduction de disque optique selon la revendication 2, dans lequel :

un signal vidéo à haute résolution comprend une composante à basse résolution et une composante à haute résolution,

le premier flux vidéo représente la composante à basse résolution,

le second flux vidéo représente la composante à haute résolution, et

la section de synthèse (36 ; 90) synthétise l'unité d'entrelacement décodée et la seconde unité d'entrelacement décodée pour générer le signal vidéo à haute résolution.

4. Appareil de reproduction de disque optique selon la revendication 2, dans lequel :

un signal vidéo tridimensionnel comprend un signal pour l'oeil droit et un signal pour l'oeil gauche,

le premier flux vidéo représente le signal pour l'oeil droit,

le second flux vidéo représente le signal pour l'oeil gauche, et

la section de synthèse (36 ; 90) synthétise la première unité d'entrelacement décodée et la seconde unité d'entrelacement, en générant ainsi le signal vidéo tridimensionnel.

5. Appareil de reproduction de disque optique selon la revendication 2, dans lequel la section de synthèse (90) exécute un premier calcul prescrit sur la première unité d'entrelacement et la seconde unité d'entrelacement, exécute un second calcul prescrit sur la première unité d'entrelacement et la seconde unité d'entrelacement, et synthétise un résultat du premier calcul prescrit ainsi qu'un résultat du second calcul prescrit, en générant ainsi un signal de synthèse. 5 10
6. Appareil de reproduction de disque optique selon la revendication 5, dans lequel le premier calcul prescrit comprend un calcul de somme de la première unité d'entrelacement et de la seconde unité d'entrelacement, et le second calcul prescrit comprend un calcul de différence de la première unité d'entrelacement et de la seconde unité d'entrelacement. 15 20
7. Appareil de reproduction de disque optique selon la revendication 6, dans lequel le premier calcul comprend en outre un calcul consistant à additionner une première valeur à un résultat du calcul de somme, et le second calcul comprend en outre un calcul consistant à additionner une seconde valeur à un résultat du calcul de différence. 25 30
8. Appareil de reproduction de disque optique selon la revendication 6, dans lequel la section de synthèse affecte le résultat du premier calcul à des données d'image d'une  $S^{\text{e}}$  ligne et affecte le résultat du second calcul à des données d'image d'une  $(S+1)^{\text{e}}$  ligne, et  $S$  est un nombre entier. 35
9. Appareil de reproduction de disque optique selon la revendication 8, destiné à reproduire un disque optique obtenu en exécutant un premier calcul de diffusion et un second calcul de division sur une  $P^{\text{e}}$  trame d'un signal vidéo d'entrée en utilisant des données vidéo d'au moins une  $2Q^{\text{e}}$  ligne et une  $(2Q+1)^{\text{e}}$  ligne du signal vidéo d'entrée, en localisant un résultat du premier calcul de division dans une  $2Q^{\text{e}}$  ligne du premier flux vidéo, en localisant un résultat du second calcul de division dans une  $2Q^{\text{e}}$  ligne du second flux vidéo, en exécutant le premier calcul de division et le second calcul de division sur une  $(P+1)^{\text{e}}$  trame du signal vidéo d'entrée en utilisant des données vidéo d'au moins la  $2Q^{\text{e}}$  ligne et la  $(2Q+1)^{\text{e}}$  ligne du signal vidéo d'entrée, en localisant un résultat du premier calcul de division dans une  $(2Q+1)^{\text{e}}$  ligne du premier flux vidéo, et en localisant un résultat du second calcul de division dans une  $(2Q+1)^{\text{e}}$  ligne du second flux vidéo, 40 45 50 55

dans lequel la section de synthèse exécute le calcul de somme et le calcul de différence d'un signal vidéo d'une  $2Q^{\text{e}}$  ou d'une  $(2Q+1)^{\text{e}}$  ligne d'un signal de décodage du premier flux vidéo et d'un signal vidéo de la  $2Q^{\text{e}}$  ou de la  $(2Q+1)^{\text{e}}$  ligne du second flux vidéo, en générant ainsi un signal de synthèse qui a pour résultat du calcul de somme un signal vidéo d'une  $2R^{\text{e}}$  ligne et résultat du calcul de différence un signal vidéo d'une  $(2R+1)^{\text{e}}$  ligne, et  $R$  et  $Q$  sont chacun un nombre entier, et  $R$  présente une relation spécifique avec  $Q$ .

10. Appareil de reproduction de disque optique selon la revendication 6, dans lequel la section de synthèse génère un signal de synthèse en utilisant des informations de couleur du premier flux vidéo, mais sans utiliser d'informations de couleur du second flux vidéo. 15
11. Appareil de reproduction de disque optique selon la revendication 6, dans lequel : 20

le signal vidéo à haute résolution comprend une composante à basse résolution et une composante à haute résolution, et la section de synthèse transforme un paramètre du calcul de somme et du calcul de différence sur la base d'informations d'identification de filtre qui représentent un paramètre de filtre de division de la composante à haute résolution et de la composante à basse résolution.

12. Appareil de reproduction de disque optique selon la revendication 5, dans lequel : 35

un signal vidéo à haute résolution comprend une composante à basse résolution et une composante à haute résolution, le premier flux vidéo représente la composante à basse résolution, le second flux vidéo représente la composante à haute résolution, et la section de synthèse génère un signal de synthèse en utilisant des informations de couleur du premier flux vidéo, mais sans utiliser d'informations de couleur du second flux vidéo.

13. Appareil de reproduction de disque optique selon la revendication 5, dans lequel : 40 45 50

un signal vidéo à haute résolution comprend une composante à basse résolution et une composante à haute résolution, le premier flux vidéo représente la composante à basse résolution, le second flux vidéo représente la composante à haute résolution, et la section de synthèse modifie un paramètre de 55

calcul conformément à des informations de division qui représentent un paramètre de division lorsque le signal à haute résolution est séparé du signal à basse résolution, les informations de division étant reproduites à partir du disque optique.

14. Appareil de reproduction de disque optique selon la revendication 13, dans lequel une constante de filtre est utilisée en tant que paramètre de calcul.

15. Appareil de reproduction de disque optique selon la revendication 5, dans lequel la section de synthèse synthétise le résultat du premier calcul prescrit et le résultat du second calcul prescrit dans une direction verticale.

16. Appareil de reproduction de disque optique selon la revendication 5, dans lequel la section de synthèse synthétise le résultat du premier calcul prescrit et le résultat du second calcul prescrit dans une direction horizontale.

17. Appareil de reproduction de disque optique selon la revendication 5, dans lequel la section de synthèse transforme le signal de synthèse en un signal progressif.

18. Appareil de reproduction de disque optique selon la revendication 2, dans lequel la section de décodage exécute un décodage en utilisant un signal de compensation du mouvement du premier flux vidéo en tant que signal de compensation du mouvement du second flux vidéo.

19. Appareil de reproduction de disque optique selon la revendication 2, comprenant en outre un moyen d'identification vidéo destiné à identifier des informations d'identification (61) qui indiquent qu'un signal vidéo à haute résolution ou qu'un signal vidéo tridimensionnel sont enregistrés, dans lequel :

lorsque le moyen d'identification vidéo identifie les informations d'identification (61), l'appareil de reproduction de disque optique (24) reproduit optionnellement à la fois la première unité d'entrelacement et la seconde unité d'entrelacement, et

la section de décodage (16) et la section de synthèse (36 ; 90) décodent et synthétisent respectivement le signal vidéo à haute résolution et/ou le signal vidéo tridimensionnel.

20. Appareil de reproduction de disque optique selon la revendication 19, dans lequel, lorsque le moyen d'identification vidéo ne reproduit pas les informations d'identification, l'appareil de reproduction de disque optique reproduit optionnellement unique-

ment la première unité d'entrelacement.

21. Appareil de reproduction de disque optique selon la revendication 20, dans lequel lorsque le moyen d'identification vidéo ne reproduit pas les informations d'identification, l'appareil de reproduction de disque optique reproduit optionnellement uniquement la première unité d'entrelacement, le nombre des lignes de balayage de la première source de signal étant augmenté.

22. Appareil de reproduction de disque optique selon la revendication 1, destiné à reproduire un disque optique comportant des premières informations de reproduction indiquant que des informations destinées à reproduire la première unité d'entrelacement sont présentes et que des informations destinées à reproduire la seconde unité d'entrelacement sont absentes, des secondes informations de reproduction indiquant que des informations destinées à reproduire la première unité d'entrelacement et que des informations destinées à reproduire la seconde unité d'entrelacement sont à la fois présentes, et des informations d'identification indiquant que les premières informations de reproduction sont valides, et des informations d'identification d'enregistrement de signal vidéo à haute résolution/signal vidéo tridimensionnel indiquant qu'un signal vidéo à haute résolution ou tridimensionnel est divisé en le premier flux vidéo et le second flux vidéo,

dans lequel, lorsque les informations d'identification d'enregistrement de signal vidéo à haute résolution/signal vidéo tridimensionnel sont détectées, l'appareil de reproduction de disque optique reproduit optionnellement à la fois la première unité d'entrelacement et la seconde unité d'entrelacement conformément aux secondes informations de reproduction.

23. Appareil de reproduction de disque optique selon la revendication 22, dans lequel l'appareil de reproduction de disque optique reproduit les secondes informations de reproduction pour acquérir des informations de position de départ d'une unité d'entrelacement immédiatement à la suite d'une unité d'entrelacement spécifique dans chaque flux vidéo, et reproduit donc à la fois la première unité d'entrelacement et la seconde unité d'entrelacement.

24. Appareil de reproduction de disque optique selon la revendication 22, dans lequel, lorsque les informations d'identification d'enregistrement de signal vidéo à haute résolution/signal vidéo tridimensionnel ne sont pas détectées, l'appareil de reproduction de disque optique reproduit la première unité d'entrelacement conformément aux premières informations de reproduction.



25. Appareil de reproduction de disque optique selon la revendication 1, dans lequel le disque optique mémorise  $n$  éléments de flux vidéo correspondant respectivement à  $n$  éléments de sources de signaux, et l'appareil de reproduction de disque optique comprend en outre une section de sélection destinée à sélectionner  $i$  éléments de flux vidéo comprenant le premier flux vidéo et le second flux vidéo à partir des  $n$  éléments de flux vidéo, et  $n$  et  $i$  sont chacun un nombre entier de deux ou plus.
26. Appareil de reproduction de disque optique selon la revendication 25, dans lequel la section de division comprend une section de mémoire tampon destinée à mettre en tampon les  $i$  éléments de flux vidéo, et la section de mémoire tampon présente une capacité totale de  $1\ 102 \times (i-1)$  kilo-octets ou plus.
27. Appareil de reproduction de disque optique selon la revendication 26, dans lequel  $i=2$ .
28. Appareil de reproduction de disque optique selon la revendication 1, dans lequel au moins le premier flux vidéo et le second flux vidéo sont décodés simultanément, et un signal vidéo d'un écran, comportant le premier flux vidéo localisé sur une première zone et le second flux vidéo localisé sur une seconde zone, est fourni en sortie.
29. Appareil de reproduction de disque optique selon la revendication 28, dans lequel la première zone et la seconde zone sont différentes l'une de l'autre dans une direction horizontale.
30. Appareil de reproduction de disque optique selon la revendication 29, dans lequel la section de synthèse comprend une mémoire de ligne (28c).
31. Appareil de reproduction de disque optique selon la revendication 28, dans lequel des informations affichées sur la première zone sont agrandies ou réduites conformément à un signal d'instruction appliqué en entrée de l'extérieur.
32. Appareil de reproduction de disque optique selon la revendication 31, dans lequel la section de synthèse comprend une mémoire de trame.
33. Appareil de reproduction de disque optique selon la revendication 31, dans lequel la première zone est agrandie et la seconde zone est réduite conformément à un signal d'instruction appliqué en entrée de l'extérieur.
34. Appareil de reproduction de disque optique selon la revendication 28, dans lequel une sous-image de l'un ou l'autre du premier flux vidéo et du second flux vidéo est affichée.
35. Appareil de reproduction de disque optique selon la revendication 28, dans lequel une mémoire de trame (28d) est utilisée pour afficher de façon continue le premier flux vidéo sur la première zone,  $n$  éléments des zones d'affichage sont fournis pour un affichage discontinu d'un  $n^{\text{e}}$  flux dans une  $n^{\text{e}}$  zone, et  $n$  est un nombre entier d'un ou plus.
36. Appareil de reproduction de disque optique selon la revendication 28, dans lequel seul un signal audio du premier flux vidéo est fourni en sortie.
37. Appareil de reproduction de disque optique selon la revendication 28, dans lequel un signal audio du premier flux vidéo et un signal audio du second flux vidéo sont fournis en sortie, et le niveau audio du second flux vidéo est diminué.
38. Appareil de reproduction de disque optique selon la revendication 1, dans lequel la section de sortie fournit en sortie le premier flux vidéo sous forme d'un signal pour l'oeil droit et le second flux vidéo sous forme d'un signal pour l'oeil gauche.
39. Appareil de reproduction de disque optique selon la revendication 38, dans lequel la section de sortie fournit en sortie le premier flux vidéo à une section de sortie vidéo pour l'oeil droit et le second flux vidéo à une section de sortie vidéo pour l'oeil gauche.
40. Appareil de reproduction de disque optique selon la revendication 39, dans lequel la section de sortie fournit en sortie un signal de synchronisation pour des lunettes tridimensionnelles, le signal de synchronisation comprenant un signal d'identification du signal pour l'oeil gauche et du signal pour l'oeil droit.
41. Appareil de reproduction de disque optique selon la revendication 39, dans lequel la section de sortie fournit en sortie le signal vidéo tridimensionnel uniquement lorsqu'une instruction de sortie vidéo tridimensionnelle est émise.
42. Appareil de reproduction de disque optique selon la revendication 39, dans lequel, pendant qu'une zone mémorisant un signal vidéo tridimensionnel est reproduite, la section de sortie fournit en sortie un affichage à une section d'affichage où le signal vidéo tridimensionnel est en cours de reproduction.
43. Appareil de reproduction de disque optique selon la revendication 38, dans lequel la section de sortie comprend une section de synthèse de mélange destinée à synchroniser des informations de temps du premier flux vidéo et des informations de temps du second flux vidéo, mélange les premier et second flux vidéo sur un principe balayage de trame

par balayage de trame ou sur un principe trame par trame, et fournit en sortie les premier et second flux vidéo en alternance.

44. Appareil de reproduction de disque optique selon la revendication 43, dans lequel la section de sortie comprend une section de signal de commutateur tridimensionnel (20) destinée à fournir en sortie un signal destiné à commuter le signal pour l'oeil gauche et le signal pour l'oeil droit. 5 10
45. Appareil de reproduction de disque optique selon la revendication 43, dans lequel la section de synthèse de mélange identifie que le signal est un signal vidéo tridimensionnel et mélange le premier flux vidéo et le second flux vidéo uniquement lorsqu'une instruction de sortie vidéo tridimensionnelle est émise. 15
46. Appareil de reproduction de disque optique selon la revendication 43, dans lequel, lorsqu'un signal vidéo non tridimensionnel est fourni en sortie alors qu'une zone mémorisant un signal vidéo tridimensionnel est reproduite, la section de sortie fournit un signal vidéo de sortie avec un affichage où le signal vidéo tridimensionnel est en cours de reproduction. 20 25
47. Appareil de reproduction de disque optique selon la revendication 38, dans lequel, lorsqu'un signal vidéo non tridimensionnel est fourni en sortie alors qu'une zone mémorisant un signal vidéo tridimensionnel est reproduite, la section de sortie fournit un signal vidéo de sortie avec un affichage où le signal vidéo tridimensionnel est en cours de reproduction. 30 35
48. Appareil de reproduction de disque optique selon la revendication 2, destiné à recevoir un flux vidéo compressé obtenu en compressant chaque signal d'une pluralité de signaux vidéo devant être reproduits en synchronisme, et une pluralité de signaux vidéo compressés obtenus en multiplexant des informations de temps de reproduction vidéo indiquant le temps afin de reproduire le signal vidéo, et en exécutant ensuite une expansion et une reproduction, l'appareil de reproduction de disque optique comprenant en outre : 40 45
- un moyen de génération de signal de temps de référence destiné à générer un signal de temps de référence, et 50
- une pluralité de moyens de reproduction d'expansion vidéo (16) destinés à expander le flux vidéo compressé et à commander le temps de reproduction du signal vidéo qui a été expansé conformément à la différence entre le signal de temps de référence et les informations de temps de reproduction vidéo, 55

dans lequel les signaux de temps de référence de la pluralité de moyens de reproduction d'expansion vidéo (16) sont compensés pratiquement en même temps en utilisant les mêmes informations.

49. Appareil de reproduction de disque optique selon la revendication 48, comprenant en outre au moins un moyen de reproduction d'expansion de signal audio (32) destiné à recevoir un flux audio compressé obtenu en compressant un signal audio devant être reproduit en synchronisme avec les signaux vidéo et au moins un signal audio compressé obtenu en multiplexant des informations de temps de reproduction audio (APTS) indiquant le temps pour reproduire le signal audio, puis en expansant le flux audio compressé, et en fournissant en sortie des informations de temps de reproduction audio, 5 10 15
- dans lequel le signal de temps de référence (STC) est compensé en utilisant les informations de temps de reproduction audio (APTS) fournies en sortie par le moyen de reproduction d'expansion audio. 20 25
50. Appareil de reproduction de disque optique selon la revendication 48, dans lequel au moins un moyen de la pluralité de moyens de reproduction d'expansion vidéo fournit en sortie des informations de temps de reproduction vidéo, et le signal de temps de référence est compensé en utilisant les informations de temps de reproduction vidéo fournies en sortie par au moins un moyen de la pluralité de moyens de reproduction d'expansion vidéo. 30 35
51. Appareil de reproduction de disque optique selon la revendication 48, dans lequel le moyen de reproduction d'expansion vidéo reproduit avec un saut ou reproduit avec une répétition une trame du signal vidéo pour commander le temps de reproduction. 40 45
52. Appareil de reproduction de disque optique selon la revendication 48, dans lequel au moins un moyen de la pluralité de moyens de reproduction d'expansion vidéo fournit en sortie un signal de synchronisation horizontale et un signal de synchronisation verticale du signal vidéo, afin de synchroniser ainsi une reproduction vidéo exécutée par un autre moyen de reproduction d'expansion vidéo sur le signal de synchronisation horizontale et le signal de synchronisation verticale. 50 55
53. Disque optique comportant, enregistrés sur celui-ci : 5 10 15 20 25 30 35 40 45 50 55
- un premier flux vidéo correspondant à une première source de signal, le premier flux vidéo étant enregistré sur le disque sous forme d'une pluralité de premières unités d'entrelacement

- (6), chaque unité d'entrelacement comprenant une pluralité de trames (5) provenant du premier flux vidéo,  
un second flux vidéo simultané correspondant à une seconde source de signal, le second flux vidéo étant enregistré sur le disque sous forme d'une pluralité de secondes unités d'entrelacement (8), chaque unité d'entrelacement comprenant une pluralité de trames (7) provenant du second flux vidéo,  
des premières informations de temps (VPTS) associées au premier flux vidéo et associées au cadencement de reproduction du premier flux vidéo,  
des secondes informations de temps (VPTS) associées au second flux vidéo et associées au cadencement de reproduction du second flux vidéo de manière à permettre une sortie depuis un dispositif de reproduction sensiblement simultanée avec le premier flux,
- dans lequel les première et seconde unités d'entrelacement sont enregistrées dans un ordre prescrit.
- 54.** Disque optique selon la revendication 53, dans lequel :
- un signal vidéo à haute résolution comprend une composante à basse résolution et une composante à haute résolution,  
le premier flux vidéo enregistré sur le disque optique représente la composante à basse résolution, et  
le second flux vidéo enregistré sur le disque optique représente la composante à haute résolution.
- 55.** Disque optique selon la revendication 54, dans lequel :
- la composante à basse résolution du premier flux vidéo enregistré sur le disque optique est générée par un calcul de somme de deux signaux spécifiques ou plus du signal à haute résolution, et  
la composante à haute résolution du second flux vidéo enregistré sur le disque optique est générée par un calcul de différence de deux signaux spécifiques ou plus du signal à haute résolution.
- 56.** Disque optique selon la revendication 55, dans lequel la composante à basse résolution du premier flux vidéo enregistré sur le disque optique et la composante à haute résolution du second flux vidéo enregistré sur le disque optique sont générées en tant que résultat d'une division exécutée dans une direction verticale par un moyen de division de signal vidéo.
- 57.** Disque optique selon la revendication 56, dans lequel :
- le premier flux vidéo comporte, dans une  $2Q^{\text{e}}$  ligne, un résultat d'un premier calcul de division exécuté sur une  $P^{\text{e}}$  trame d'un signal vidéo d'entrée en utilisant les données vidéo d'au moins une  $2Q^{\text{e}}$  ligne et d'une  $(2Q+1)^{\text{e}}$  ligne du signal vidéo d'entrée,  
le second flux vidéo comporte, dans une  $2Q^{\text{e}}$  ligne, un résultat d'un second calcul de division exécuté sur une  $P^{\text{e}}$  trame du signal vidéo d'entrée en utilisant des données vidéo d'au moins une  $2Q^{\text{e}}$  ligne et d'une  $2Q+1^{\text{e}}$  ligne du signal vidéo d'entrée,  
le premier flux vidéo d'entrée comporte, dans une  $(2Q+1)^{\text{e}}$  ligne, un résultat du premier calcul de division exécuté sur une  $(P+1)^{\text{e}}$  trame du signal vidéo d'entrée,  
le second flux vidéo comporte, dans une  $(2Q+1)^{\text{e}}$  ligne, un résultat du second calcul de division exécuté sur une  $(P+1)^{\text{e}}$  trame du signal vidéo d'entrée, et  
 $P$  et  $Q$  sont chacun un nombre entier.
- 58.** Disque optique selon la revendication 54, dans lequel la composante à basse résolution du premier flux vidéo enregistré sur le disque optique et la composante à haute résolution du second flux vidéo enregistré sur le disque optique sont générées en tant que résultat d'une division exécutée dans une direction verticale par un moyen de division de signal vidéo.
- 59.** Disque optique selon la revendication 54, dans lequel le premier flux vidéo enregistré sur le disque optique et le second flux vidéo enregistré sur le disque optique sont générés en divisant un signal vidéo à haute résolution dans une direction horizontale grâce à un moyen de division de signal vidéo, de sorte que le premier flux vidéo présente une composante à basse résolution horizontale et le second flux vidéo présente une composante à haute résolution horizontale.
- 60.** Disque optique selon la revendication 59, sur lequel des signaux de balayage de trame ou de trame en chevauchement sont enregistrés dans un signal vidéo dans un état codé abrégé, et un identificateur est enregistré en indiquant le signal de balayage de trame ou de trame abrégé.
- 61.** Disque optique selon la revendication 54, sur lequel des informations d'identification sont enregistrées en indiquant un paramètre de calcul utilisé pour le

calcul de division destiné à diviser un signal vidéo.

62. Disque optique selon la revendication 54, dans lequel les informations de vecteur de mouvement d'un signal de codage vidéo du premier flux vidéo et les informations de vecteur de mouvement d'un signal de codage vidéo du second flux vidéo présentent une valeur identique.

63. Disque optique selon la revendication 53, sur lequel au moins le premier flux vidéo et le second flux vidéo sont enregistrés tout en étant codés sous un format de signal pratiquement identique.

64. Disque optique selon la revendication 63, dans lequel le format de signal pratiquement identique est obtenu en codant un signal de type NTSC, PAL ou SECAM.

65. Disque optique selon la revendication 53, dans lequel des unités d'entrelacement correspondant à chacun des premier à  $m^{\text{e}}$  flux sont des première à  $m^{\text{e}}$  unités d'entrelacement, le disque optique comporte :

des premières informations de reproduction comprenant des informations destinées à la reproduction de la première unité d'entrelacement, mais excluant des informations destinées à la reproduction de la seconde unité d'entrelacement,

des secondes informations de reproduction comprenant à la fois des informations destinées à la reproduction de la première unité d'entrelacement et des informations destinées à la reproduction des secondes unités d'entrelacement, et

un identificateur destiné à rendre les secondes informations de reproduction valides.

66. Disque optique selon la revendication 65, dans lequel des informations de reproduction d'une première unité d'entrelacement comprennent des informations de position de tête d'une autre unité d'entrelacement, dans lequel l'autre unité d'entrelacement appartient au même flux que la première unité d'entrelacement et représente l'unité d'entrelacement suivante la plus proche de la première unité d'entrelacement parmi les unités d'entrelacement présentant des informations de temps.

67. Disque optique selon la revendication 66, sur lequel des informations de reproduction de la première unité d'entrelacement dans une première table sont enregistrées en tant que premières informations de reproduction, des informations de reproduction de la première unité d'entrelacement et de la seconde unité d'entrelacement dans une seconde table sont

enregistrées en tant que secondes informations de reproduction, et un identificateur est enregistré, indiquant que la première table est valide.

68. Disque optique selon la revendication 67, sur lequel une table destinée à une reproduction sans raccord est enregistrée en tant que première table, une table destinée à une reproduction non dépourvue de raccord est enregistrée en tant que seconde table, et un identificateur est enregistré indiquant la reproduction sans raccord.

69. Disque optique selon la revendication 53, dans lequel un signal vidéo codé destiné à un signal pour l'oeil droit d'un signal vidéo tridimensionnel est utilisé en tant qu'au moins le premier flux vidéo, et un signal vidéo codé destiné à un signal pour l'oeil gauche du signal vidéo tridimensionnel est utilisé en tant qu'au moins le second flux vidéo, un identificateur étant enregistré sur le disque optique, indiquant une zone d'enregistrement où le signal vidéo tridimensionnel est enregistré.

70. Disque optique selon la revendication 53, dans lequel un signal vidéo codé destiné à une composante à basse résolution d'un signal vidéo à haute résolution est utilisé en tant qu'au moins le premier flux vidéo, et un signal vidéo codé destiné à une composante à haute résolution d'un signal vidéo à haute résolution est utilisé en tant qu'au moins le second flux vidéo, un identificateur étant enregistré sur le disque optique, indiquant une zone d'enregistrement où le signal vidéo à haute résolution est enregistré.

71. Appareil d'enregistrement de disque optique (2) destiné à enregistrer un signal prescrit sur un disque optique, dans lequel le signal prescrit comprend un premier flux vidéo correspondant à une première source de signal, et un second flux vidéo simultané correspondant à une seconde source de signal, l'appareil comprenant :

un moyen destiné à enregistrer le premier flux vidéo sur le disque sous forme d'une pluralité de premières unités d'entrelacement (6), chaque unité d'entrelacement comprenant une pluralité de trames (5) provenant du premier flux vidéo,

un moyen destiné à enregistrer le second flux vidéo sur le disque sous forme d'une pluralité de secondes unités d'entrelacement (8), chaque unité d'entrelacement comprenant une pluralité de trames (7) provenant du second flux vidéo,

un moyen destiné à enregistrer des premières informations de temps (VPTS) associées au premier flux vidéo et associées au cadence-

ment de reproduction du premier flux vidéo, et un moyen destiné à enregistrer des secondes informations de temps (VPTS) associées au second flux vidéo et associées au cadencement de reproduction du second flux vidéo, de manière à permettre une sortie provenant d'un dispositif de reproduction sensiblement simultanée avec le premier flux,

dans lequel les première et seconde unités d'entrelacement sont enregistrées dans un ordre prescrit.

- 72.** Appareil d'enregistrement de disque optique selon la revendication 71, comprenant en outre un moyen de division de signal vidéo (38) destiné à diviser un signal vidéo à haute résolution en une composante à basse résolution et une composante à haute résolution, dans lequel :

le premier flux vidéo enregistré sur le disque optique représente la composante à basse résolution, et  
le second flux vidéo enregistré sur le disque optique représente la composante à haute résolution.

- 73.** Appareil d'enregistrement de disque optique selon la revendication 72, dans lequel le moyen de division de signal vidéo (38) génère la composante à basse résolution grâce à un calcul de somme de deux signaux spécifiques ou plus du signal vidéo à haute résolution et génère la composante à haute résolution grâce à un calcul de différence de deux signaux spécifiques ou plus du signal vidéo à haute résolution.

- 74.** Appareil d'enregistrement de disque optique selon la revendication 73, dans lequel le moyen de division de signal vidéo (38) divise le signal vidéo en une composante à basse résolution verticale et une composante à haute résolution verticale.

- 75.** Appareil d'enregistrement de disque optique selon la revendication 74, dans lequel le moyen de division de signal vidéo (38) localise :

un résultat d'un premier calcul de division exécuté sur une  $P^{\text{e}}$  trame d'un signal vidéo d'entrée en utilisant des données vidéo d'au moins une  $2Q^{\text{e}}$  ligne et une  $(2Q+1)^{\text{e}}$  ligne du signal vidéo d'entrée dans une  $2Q^{\text{e}}$  ligne du premier flux vidéo,  
un résultat d'un second calcul de division exécuté sur une  $P^{\text{e}}$  trame du signal vidéo d'entrée en utilisant des données vidéo d'au moins une  $2Q^{\text{e}}$  ligne et une  $(2Q+1)^{\text{e}}$  ligne du signal vidéo d'entrée dans une  $2Q^{\text{e}}$  ligne du second flux vi-

déo,  
un résultat du premier calcul de division exécuté sur une  $(P+1)^{\text{e}}$  trame du signal vidéo d'entrée dans une  $(2Q+1)^{\text{e}}$  ligne du premier flux vidéo, et  
un résultat du second calcul de division exécuté sur une  $(P+1)^{\text{e}}$  trame du signal vidéo d'entrée dans une  $(2Q+1)^{\text{e}}$  ligne du second flux vidéo,  $P$  et  $Q$  étant chacun un nombre entier.

- 76.** Appareil d'enregistrement de disque optique selon la revendication 72, dans lequel le moyen de division de signal vidéo divise le signal vidéo à haute résolution en une composante à basse résolution verticale et une composante à haute résolution verticale.

- 77.** Appareil d'enregistrement de disque optique selon la revendication 72, dans lequel le moyen de division de signal vidéo divise le signal vidéo à haute résolution en le premier flux vidéo comportant une composante à basse résolution horizontale et le second flux vidéo comportant une composante à haute résolution horizontale.

- 78.** Appareil d'enregistrement de disque optique selon la revendication 77, dans lequel des signaux de balayage de trame ou de trame en chevauchement dans un signal vidéo sont enregistrés sous un état codé abrégé, et l'appareil d'enregistrement de disque optique enregistre un identificateur indiquant le signal de balayage de trame ou de trame abrégé.

- 79.** Appareil d'enregistrement de disque optique selon la revendication 72, dans lequel l'appareil enregistre des informations d'identification indiquant un paramètre de calcul (144) utilisé pour le calcul de division destiné à diviser un signal vidéo.

- 80.** Appareil d'enregistrement de disque optique selon la revendication 72, dans lequel une section de détection de vecteur de mouvement d'une section de codage vidéo utilise un signal de détection de vecteur de mouvement de l'un des flux pour coder l'autre flux.

- 81.** Appareil d'enregistrement de disque optique selon la revendication 72, dans lequel au moins le premier flux vidéo et le second flux vidéo sont codés grâce à un format de signal sensiblement identique.

- 82.** Appareil d'enregistrement de disque optique selon la revendication 81, dans lequel le format de signal sensiblement identique est obtenu en codant un signal de type NTSC, PAL ou SECAM.

- 83.** Appareil d'enregistrement de disque optique selon la revendication 71, dans lequel des unités d'entre-

lacement correspondant à chacun des premier à m<sup>e</sup> flux sont des première à m<sup>e</sup> unités d'entrelacement, l'appareil d'enregistrement de disque optique enregistre :


des premières informations de reproduction comprenant des informations destinées à la reproduction de la première unité d'entrelacement, mais excluant des informations destinées à la reproduction de la seconde unité d'entrelacement,  
des secondes informations de reproduction comprenant à la fois des informations destinées à la reproduction de la première unité d'entrelacement et des informations destinées à la reproduction des secondes unités d'entrelacement, et  
un identificateur destiné à rendre valide les secondes informations de reproduction.

84. Appareil d'enregistrement de disque optique selon la revendication 83, dans lequel des informations de reproduction d'une unité d'entrelacement comprennent des informations de position de tête d'une autre unité d'entrelacement, dans lequel l'autre unité d'entrelacement appartient au même flux que la première unité d'entrelacement et représente l'unité d'entrelacement suivante la plus proche de la première unité d'entrelacement parmi des unités d'entrelacement comportant des informations de temps.
85. Appareil d'enregistrement de disque optique selon la revendication 84, dans lequel l'appareil enregistre des informations de reproduction de la première unité d'entrelacement dans une première table en tant que premières informations de reproduction, des informations de reproduction de la première unité d'entrelacement et de la seconde unité d'entrelacement dans une seconde table en tant que secondes informations de reproduction, et un identificateur indiquant que la première table est valide.
86. Appareil d'enregistrement de disque optique selon la revendication 85, qui enregistre, une table destinée à une reproduction sans raccord en tant que première table, une table destinée à une reproduction non dépourvue de raccord en tant que seconde table, et un identificateur indiquant la reproduction sans raccord.
87. Appareil d'enregistrement de disque optique selon la revendication 71, dans lequel un signal vidéo codé destiné à un signal pour l'oeil droit d'un signal vidéo tridimensionnel est utilisé en tant qu'au moins le premier flux vidéo, et un signal vidéo codé destiné à un signal pour l'oeil gauche du signal vidéo tridimensionnel est utilisé en tant qu'au moins le second flux vidéo, un identificateur étant enregistré sur le

disque optique, indiquant une zone d'enregistrement où le signal vidéo tridimensionnel est enregistré.


88. Appareil d'enregistrement de disque optique selon la revendication 71, dans lequel un signal vidéo codé destiné à une composante à basse résolution d'un signal vidéo à haute résolution est utilisé en tant qu'au moins le premier flux vidéo, et un signal vidéo codé destiné à une composante à haute résolution du signal vidéo à haute résolution est utilisé en tant qu'au moins le second flux vidéo, un identificateur étant enregistré sur le disque optique, indiquant une zone d'enregistrement où le signal vidéo à haute résolution est enregistré.
89. Disque optique selon la revendication 70, comportant un résultat d'un calcul spécifique des informations d'identification et des informations d'attributs de disque inhérentes au disque maître du disque optique ou au disque optique.

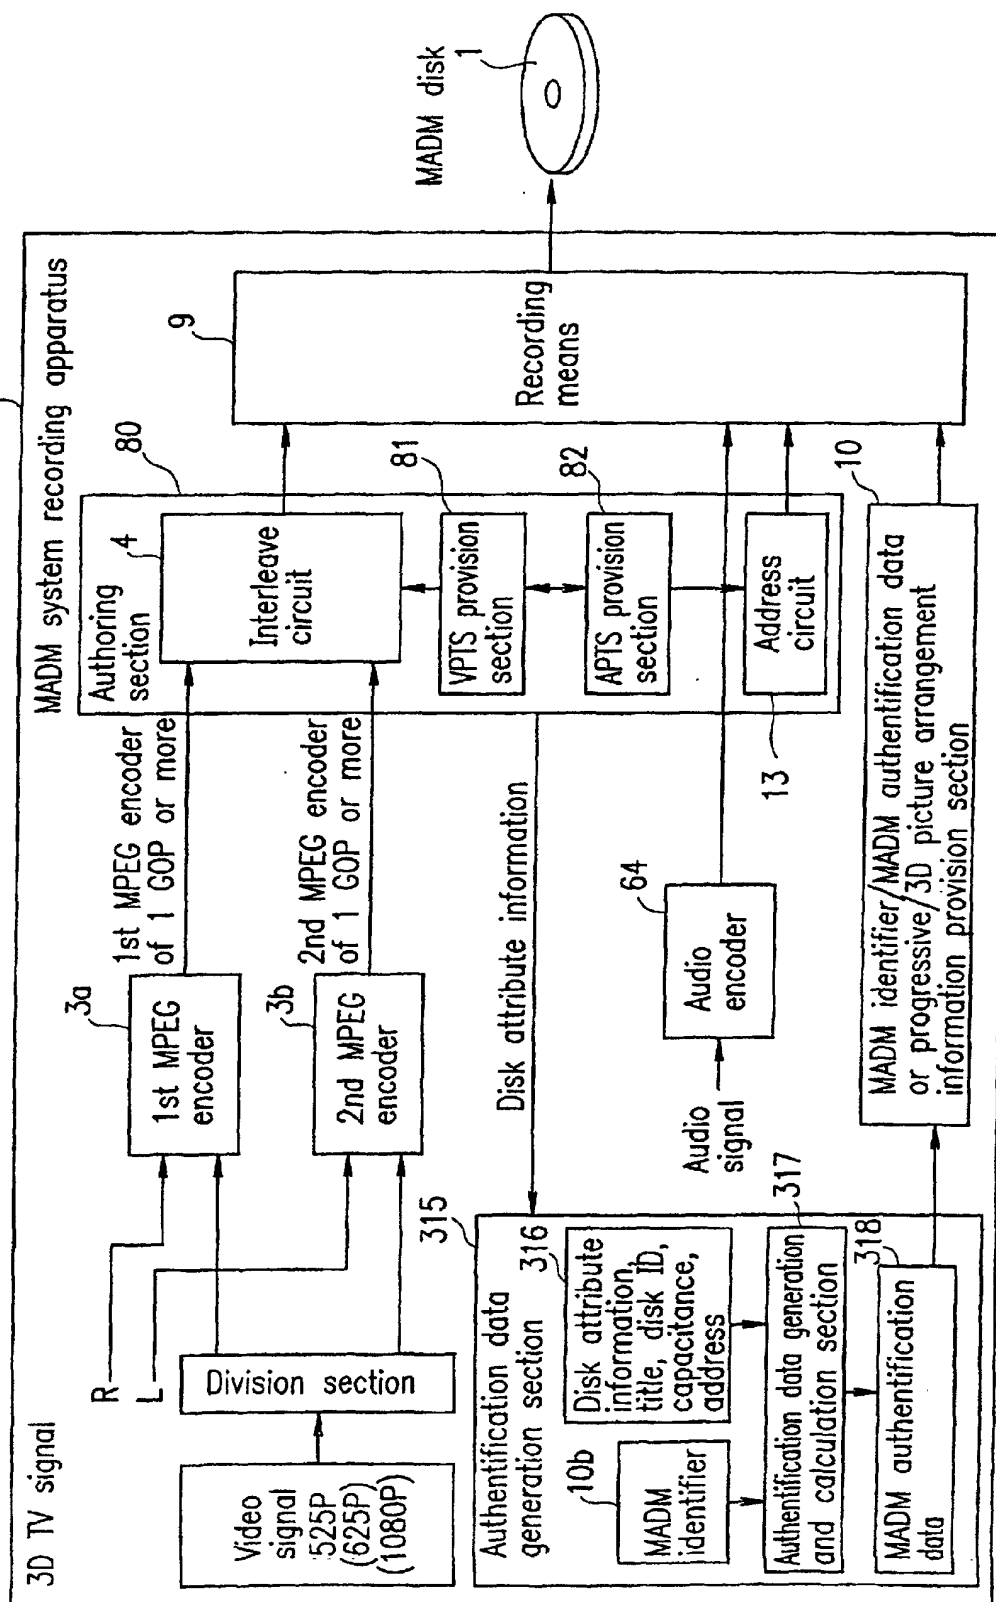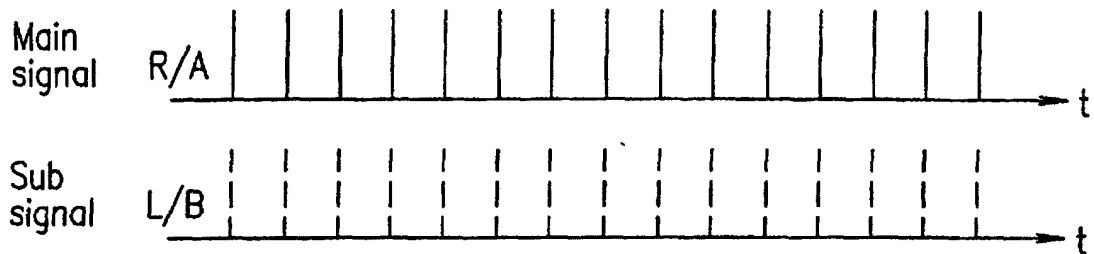FIG. 1

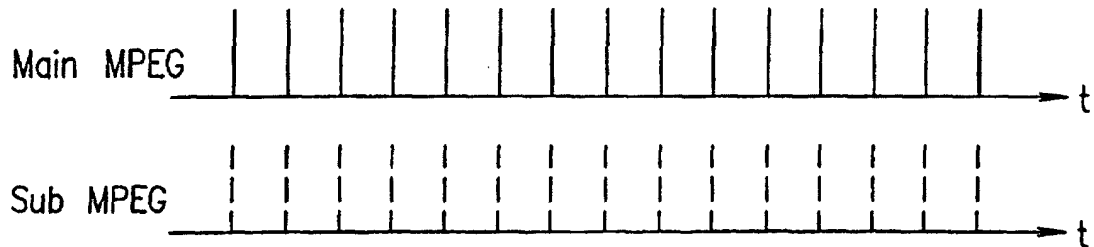


**FIG. 2**

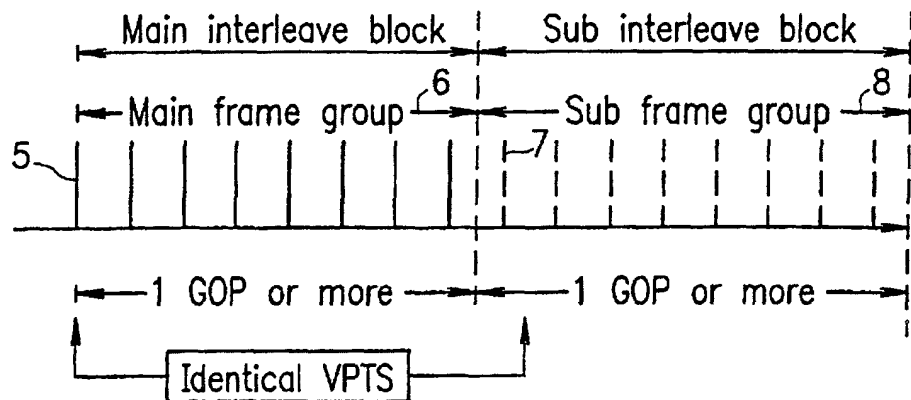
(1) Input signal (frame information)




(2) Signal (frame unit)




(3) Recording signal (interleave signal)



(4) Disk rotation (1 pulse/rotation)

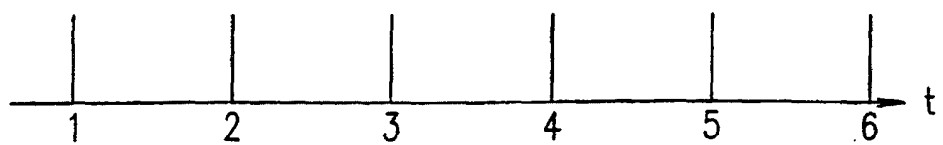



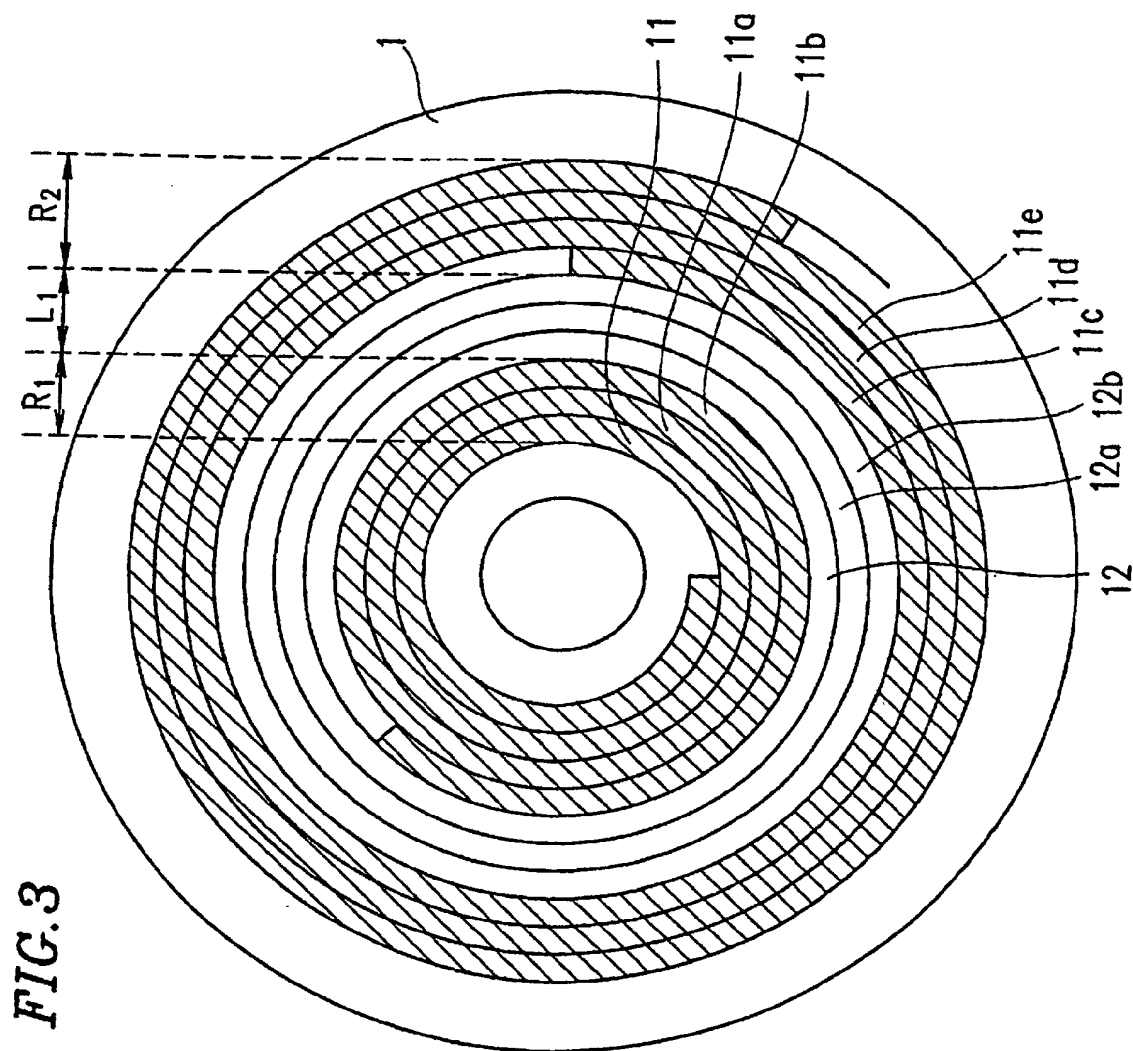


**FIG. 4**

Progressive/3D picture arrangement information (MADM identifier)

		83 TXTDT file		14 PGC file in each VTS				
VTS (title)	Cell	TXTDT information		Angle		Start address	Termination address	Identification information
		Attribute	Number of multiple angles					
1	1,2	3D Cell1, 2	2	1	Main	a1	a3	3D-right
				2	Sub	a2	a4	3D-left
2	1,2	3D Cell1, 2	2	1	Main	a5	a7	3D-right
				2	Sub	a6	a8	3D-left
	3,4	Progressive 525P x multiple angles (Cell1, 2)	4	1	Main	a9	a13	1-525P-main
				2	Sub	a10	a14	1-525P-sub
				3	Main	a11	a15	2-525P-main
				4	Sub	a12	a16	2-525P-sub
3	1,2	Wide 525P (Cell1, 2)	2	1	Main	a17	a19	Wide 525i-main
				2	Sub	a18	a20	Wide 525i-sub
4	1,2	Wide 525P	4	1	Main	a21	a22	Wide 525P-main main
				2	Sub	a23	a24	Wide 525P-main sub
				3	Main	a25	a26	Wide 525P-sub main
				4	Sub	a27	a28	Wide 525P-sub sub
5	1,2 3,4	3D 525P	4	1	Main	a29	a30	Right 525P-main
				2	Sub	a31	a32	Right 525P-sub
				3	Main	a33	a34	Left 525P-main
				4	Sub	a35	a36	Left 525P-sub

FIG. 5

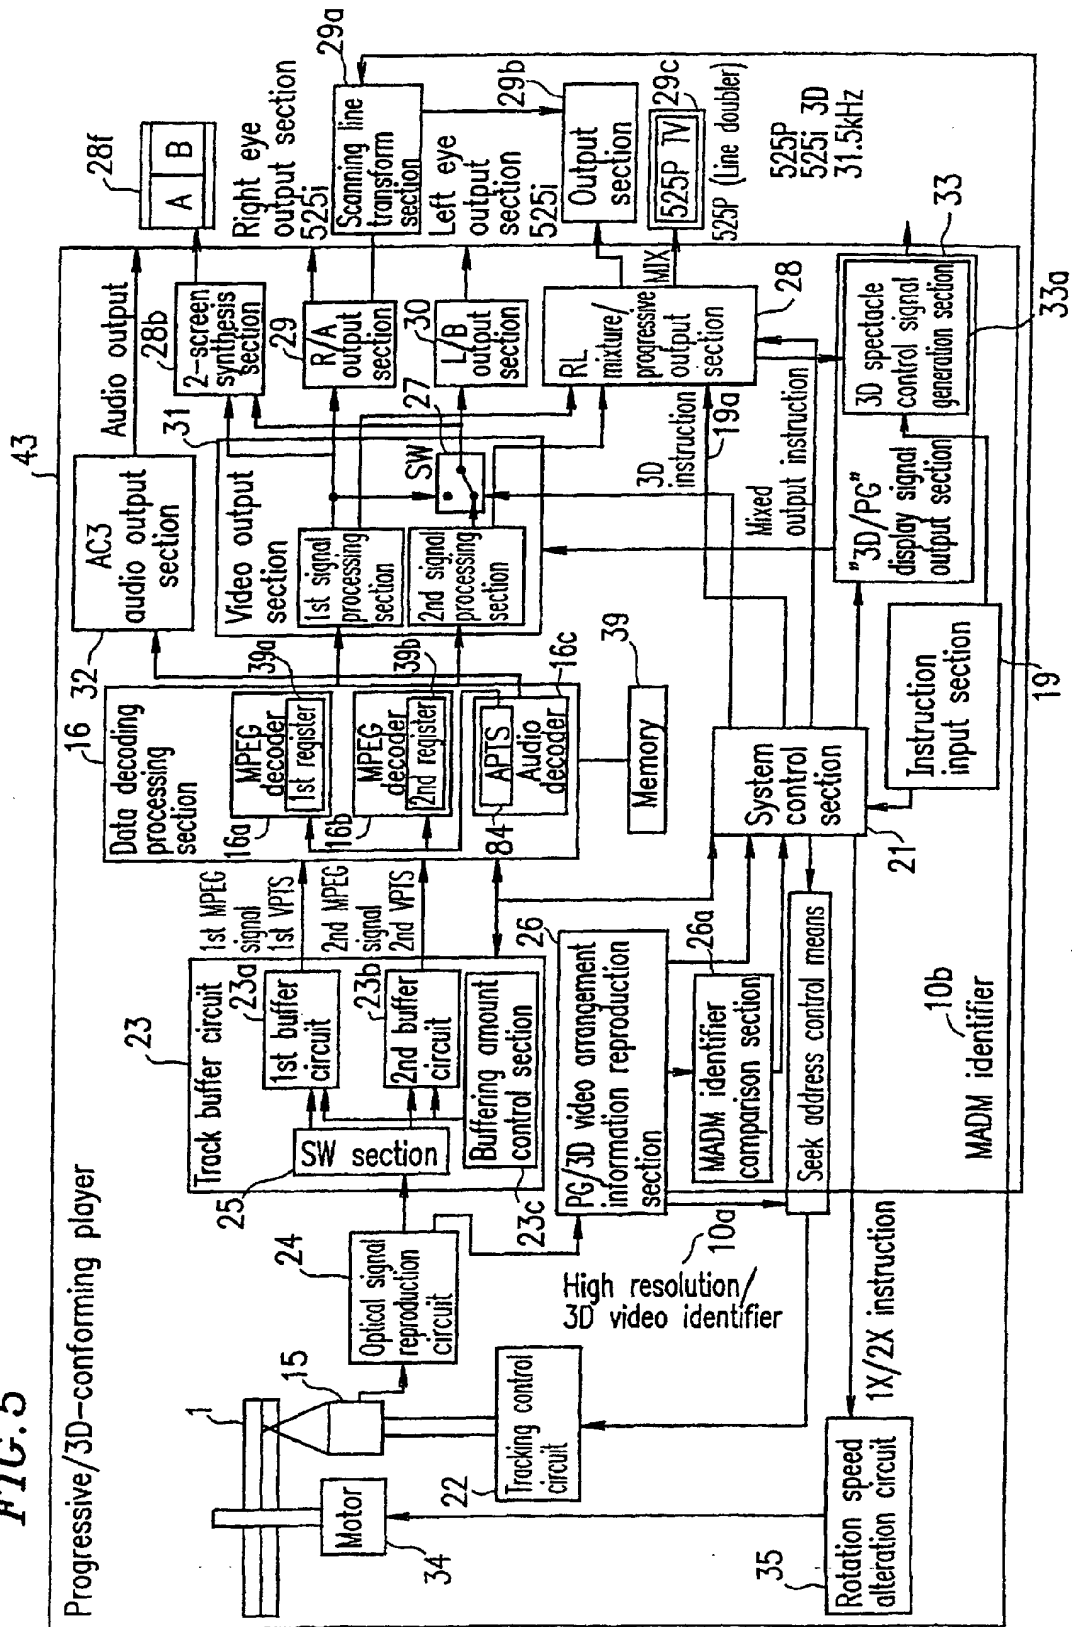

**FIG. 6**

R and L channel output  
3D video identifier = 1

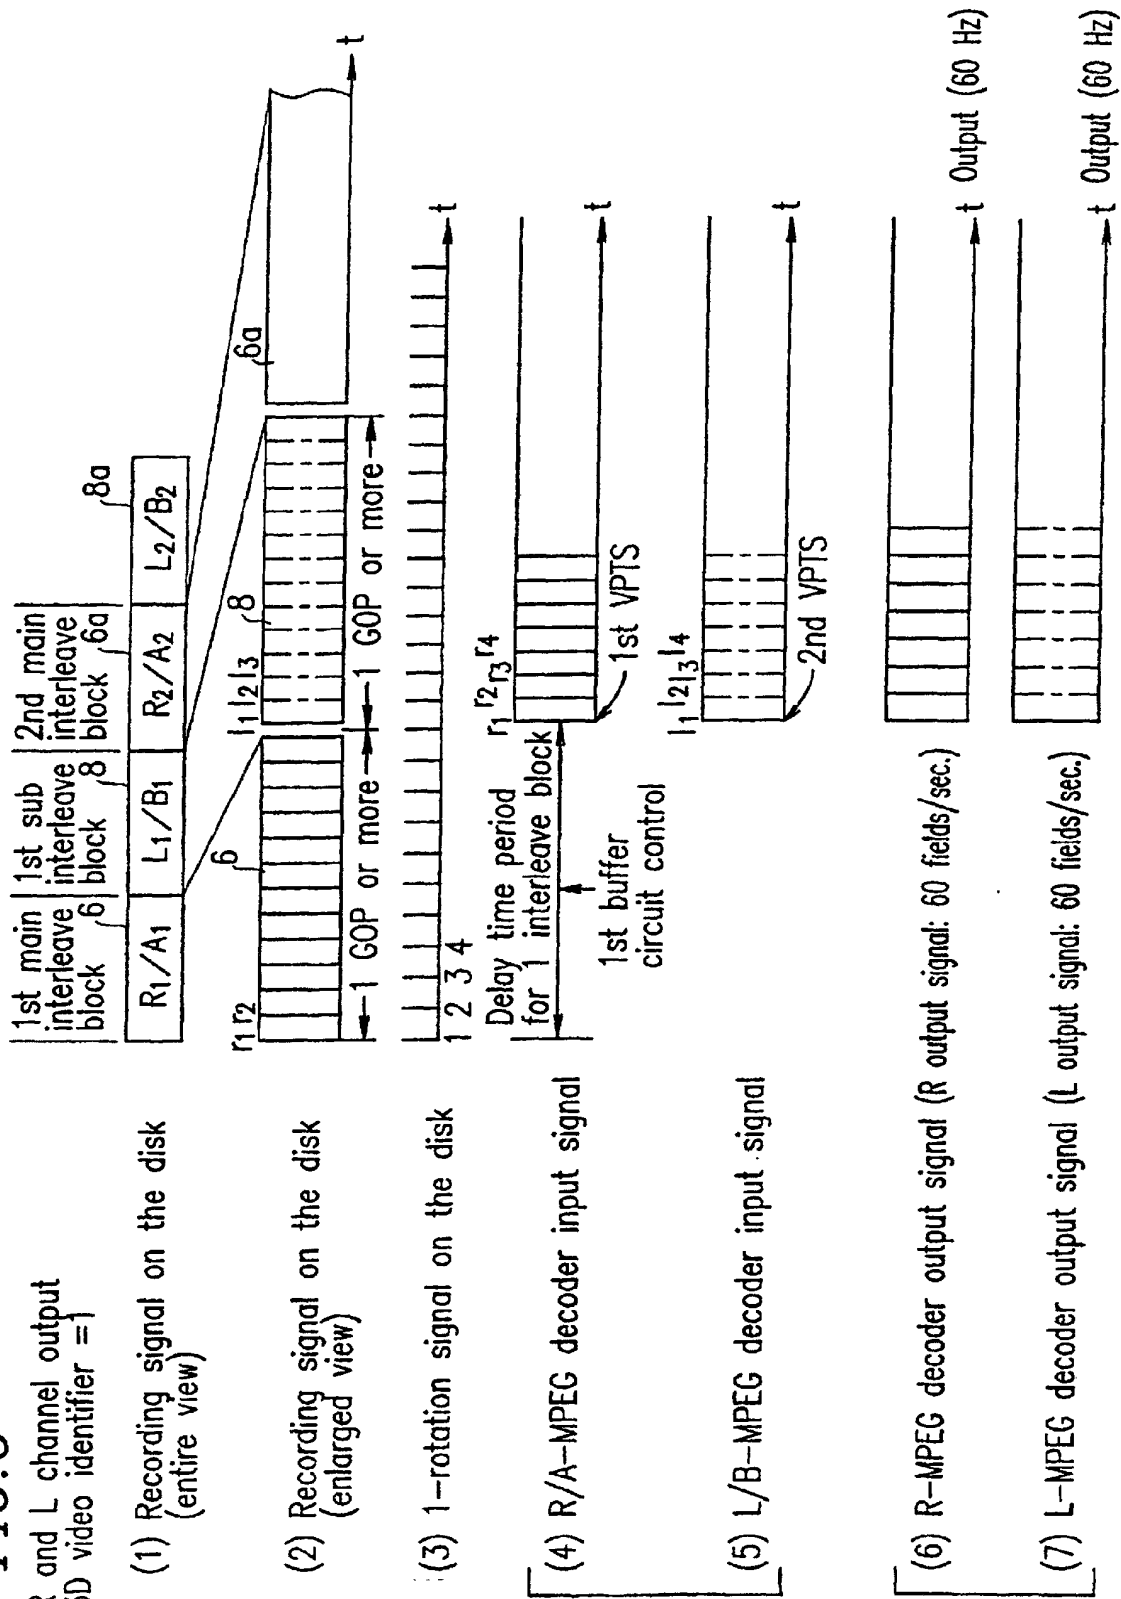


FIG. 7


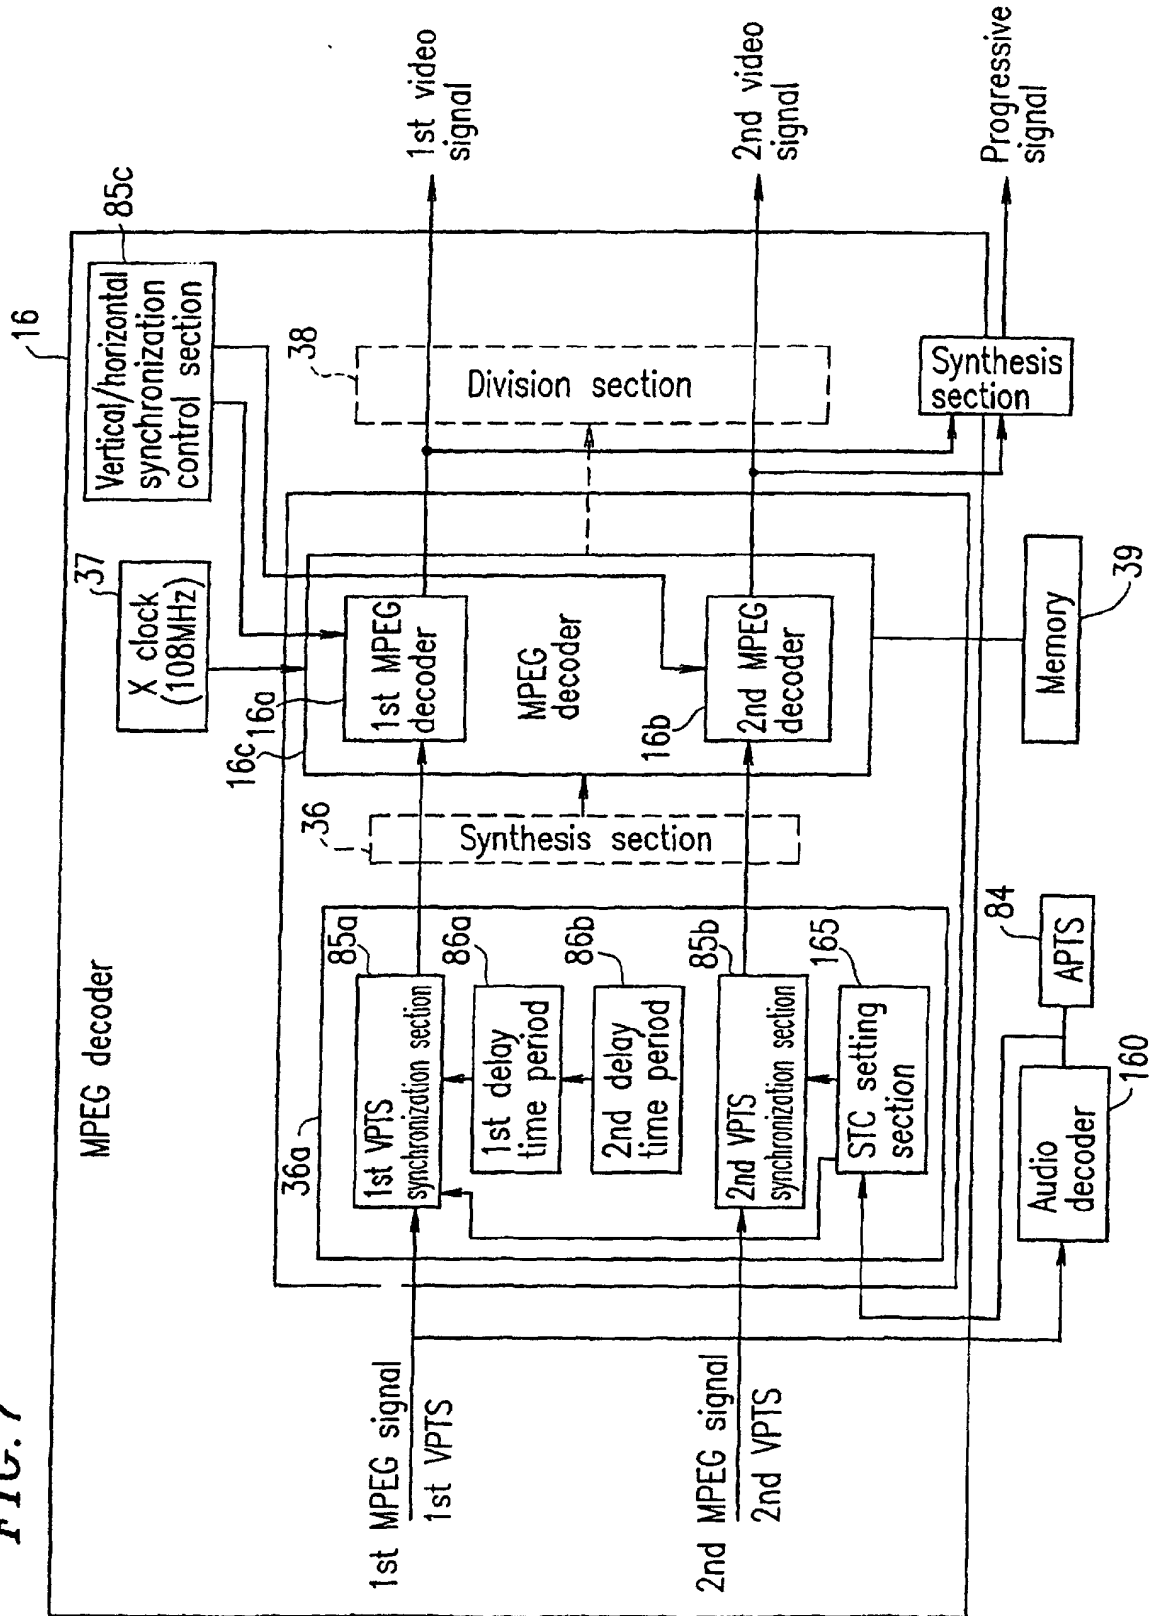




FIG. 9

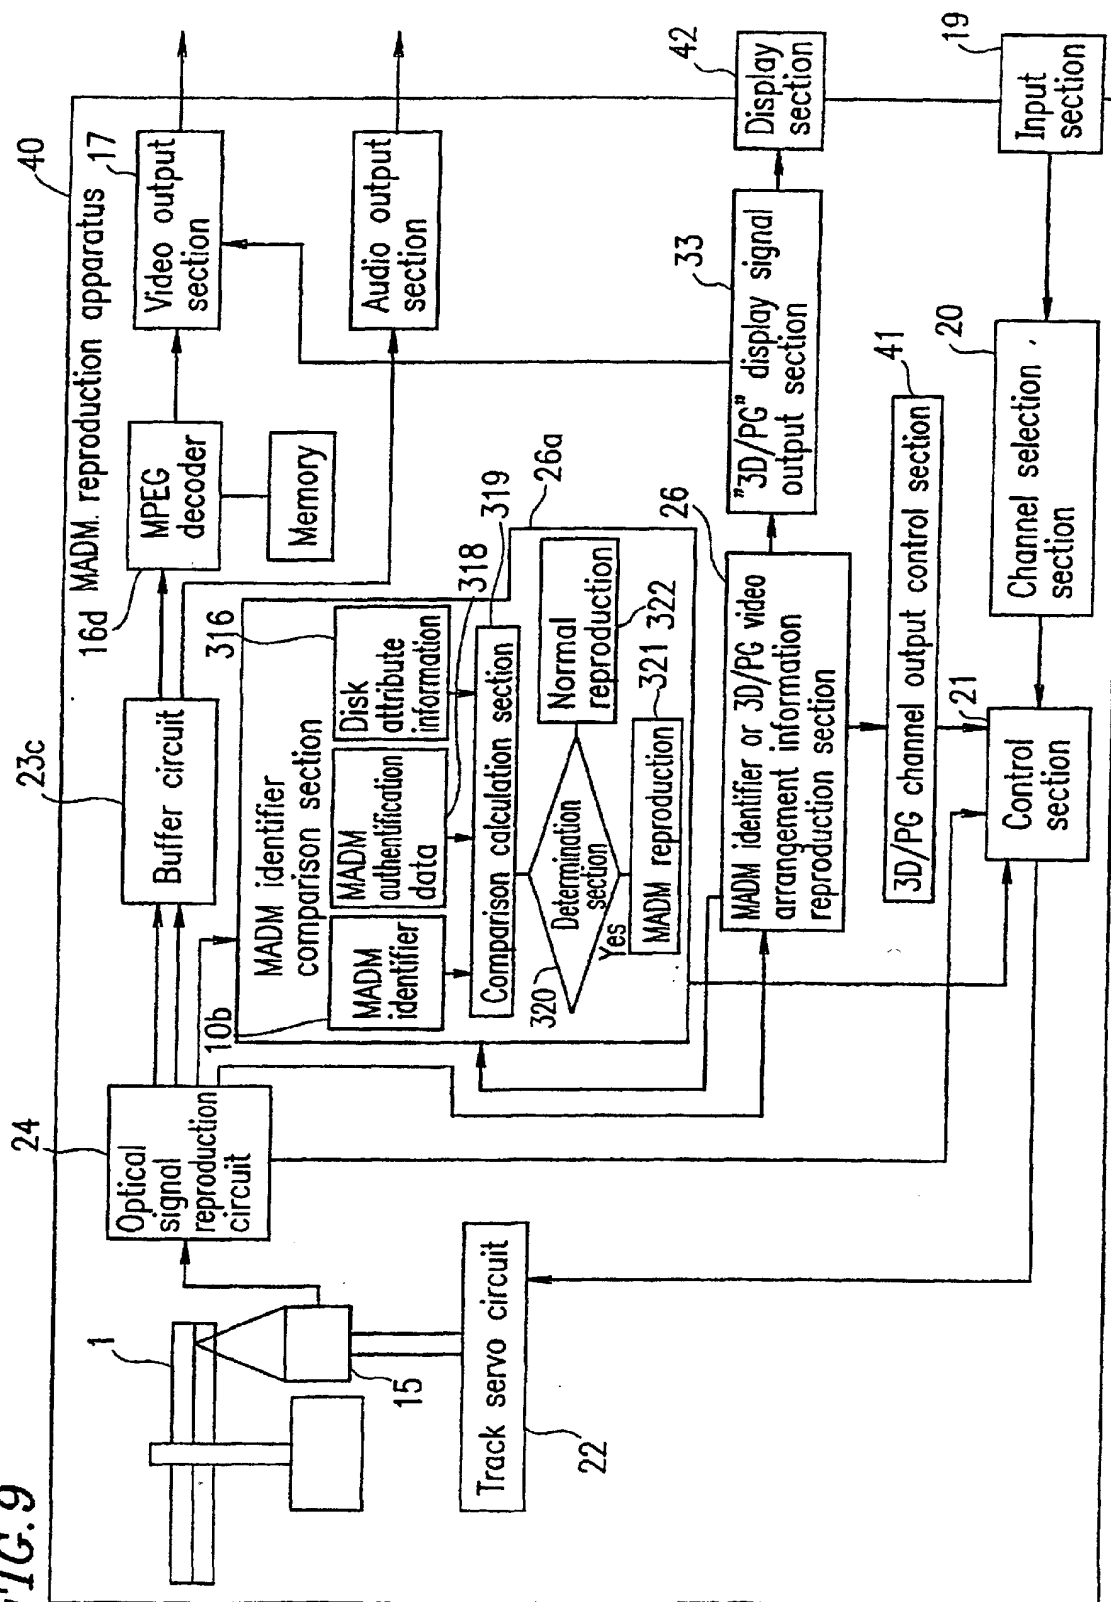

**FIG. 10**


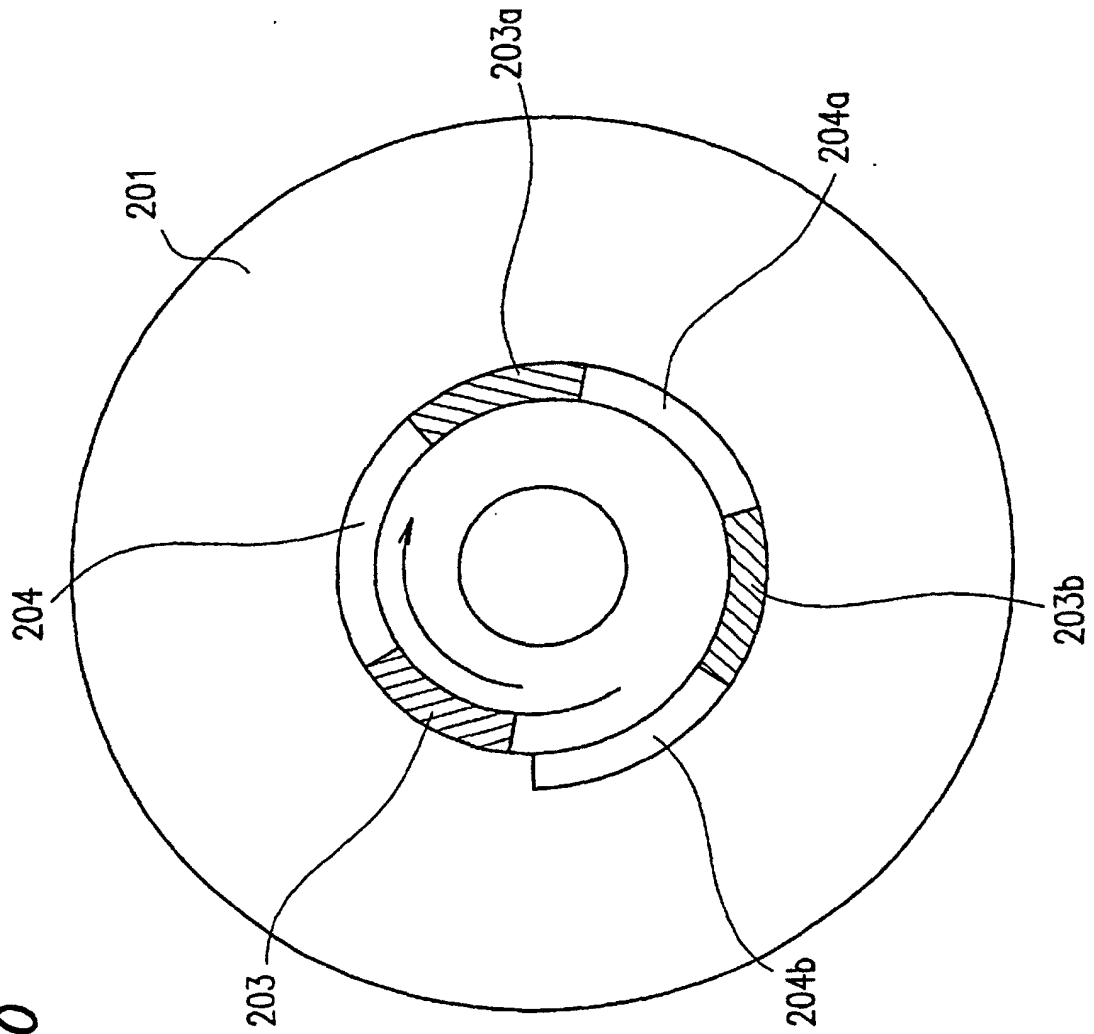




FIG. 11

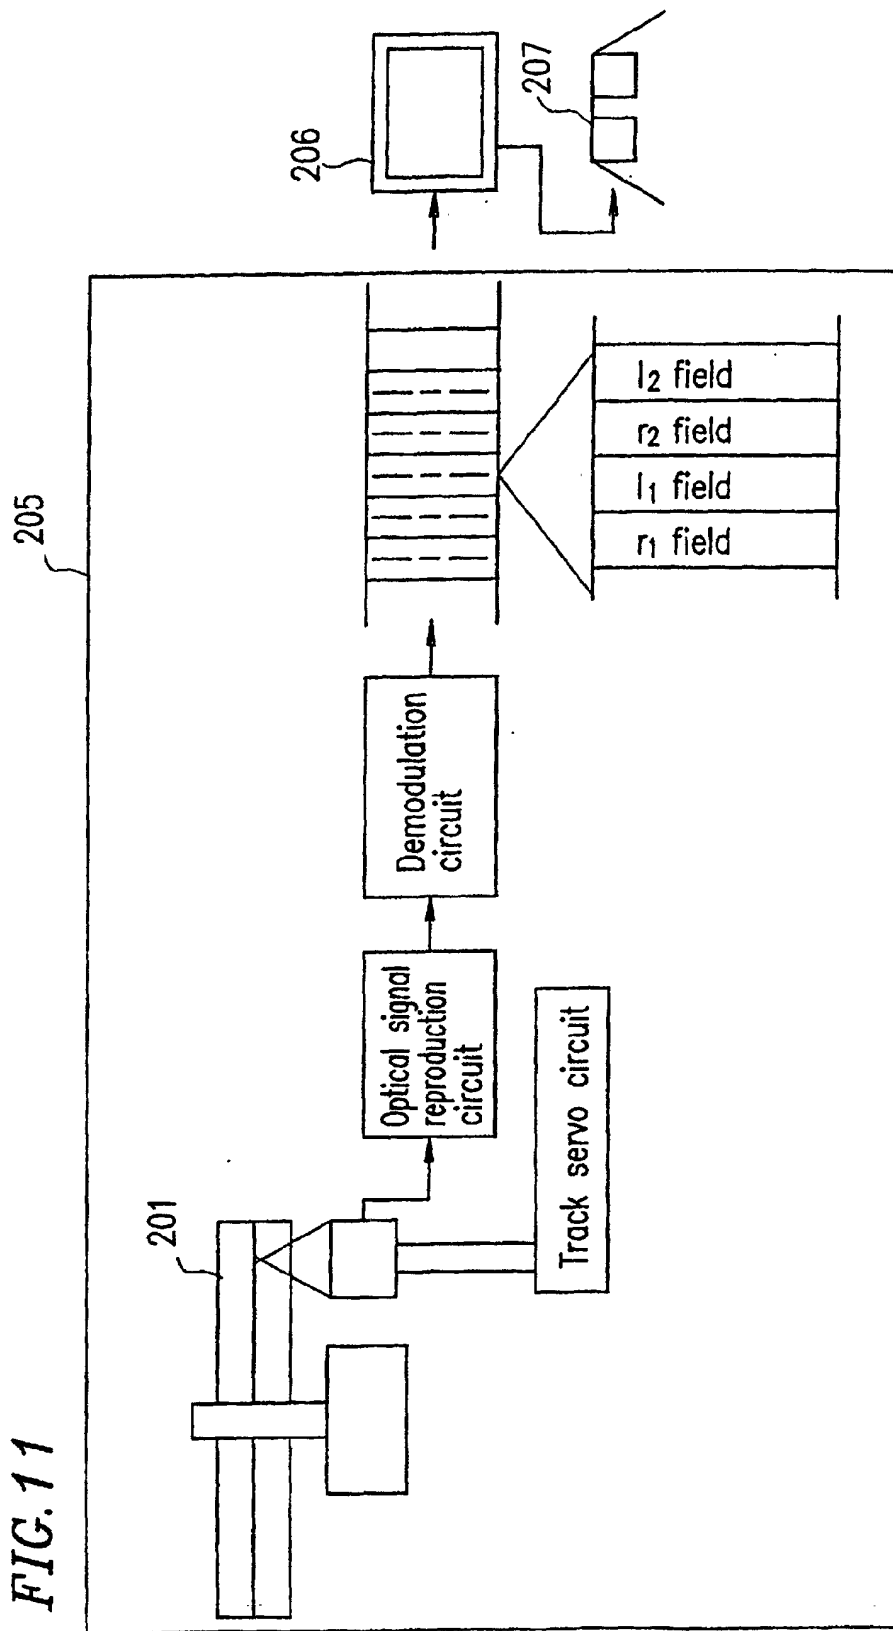

**FIG. 12**

Conventional time chart

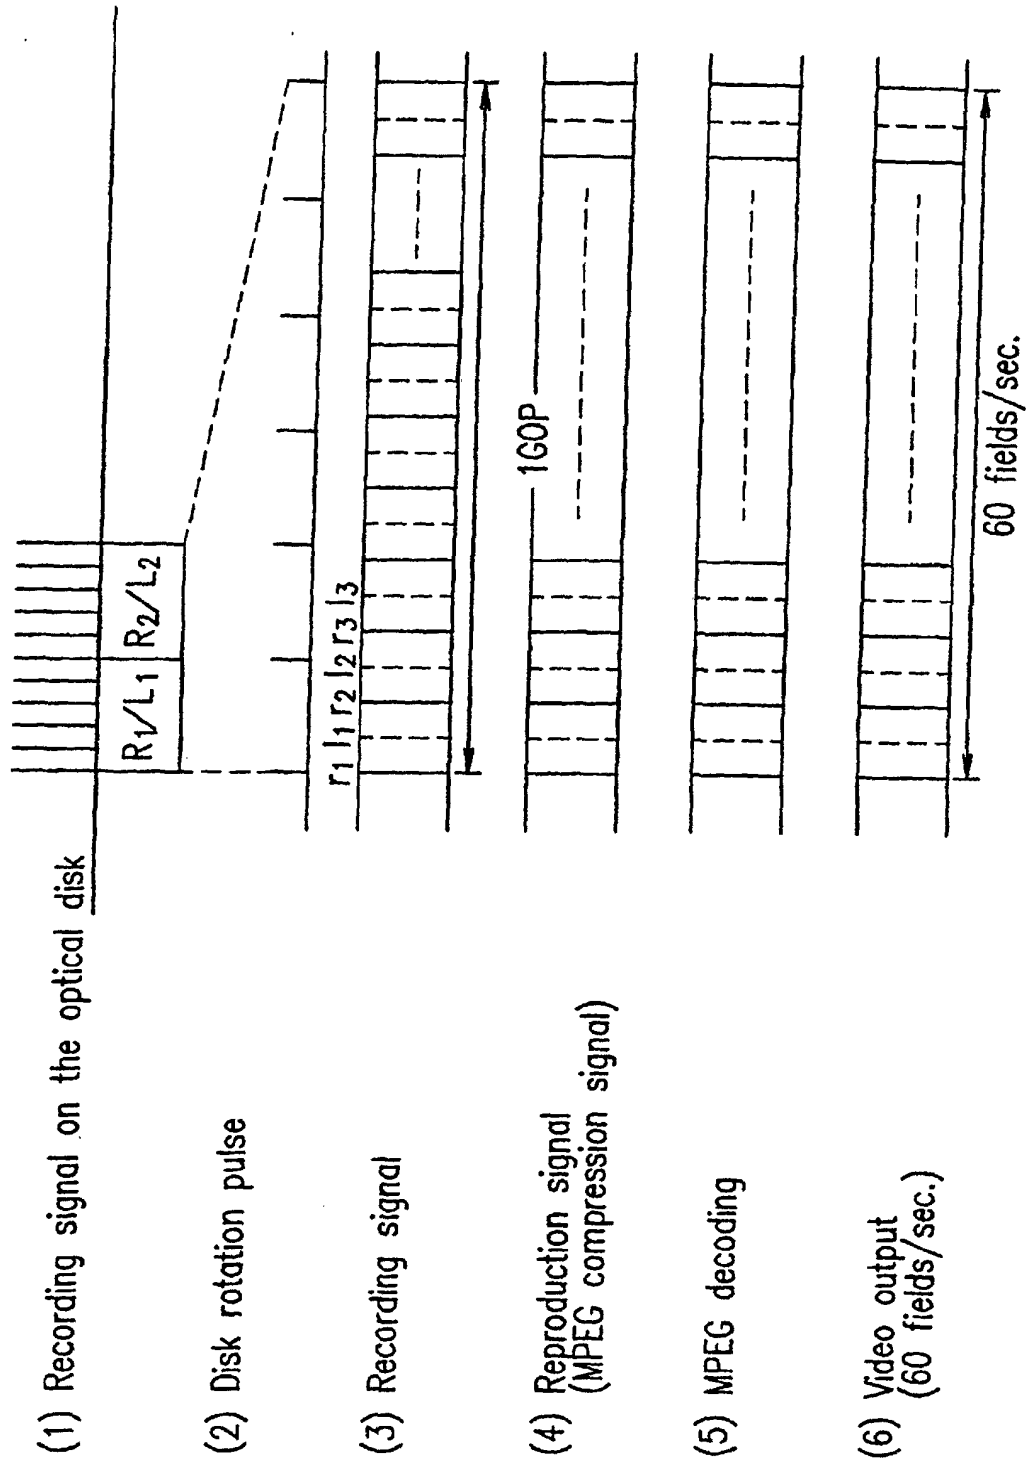


FIG. 13

(1) 3D/PG video identifier

With 3D/PG video identifier				Without 3D/PG video identifier																			
t <sub>1</sub>	46	t <sub>2</sub>	47	t <sub>3</sub>	46a	t <sub>4</sub>	47a	t <sub>5</sub>	46b	t <sub>6</sub>	47b	t <sub>7</sub>	46c	t <sub>8</sub>	47c	t <sub>9</sub>	46d	t <sub>10</sub>	47d	t <sub>11</sub>			
				6	8					6b	8b					44	45						
				R <sub>1</sub>	L <sub>1</sub>	R <sub>2</sub>	L <sub>2</sub>					R <sub>3</sub>	L <sub>3</sub>					A <sub>1</sub>	B <sub>1</sub>				

(2) Recording signal

(Note) Delay by 1t  
(1 interleave block time period)

(3) R output (30fps)

(4) L output (30fps)

(5) Mixed output (120Hz)

(6) Mixed output (60Hz)

**FIG. 14**

(1) Recording data on the optical disk

Address	a1	a2	a3	a4	a5	a6	a7	a8	a9	a10
		A <sub>1</sub>	B <sub>1</sub>	C <sub>1</sub>	D <sub>1</sub>	A <sub>2</sub>	B <sub>2</sub>	C <sub>2</sub>	D <sub>2</sub>	A <sub>3</sub>
Pointer	a5	a6	a7	a8	a9 ("FFF6")	a10				

(2) Normal-mode reproduction sequence

	Reproduction (a5)	Track jump to a5	Reproduction (a9)	Track jump to a9	Reproduction
--	-------------------	------------------	-------------------	------------------	--------------

### With 3D identifier

3D identifier  $A=R(1)=a_1, L(1)=a_2 \sim a_{n+1}, R(2)=a_{n2} \sim a_{n3}, L(2)=a_{n2+1} \sim a_{n3+1},$

(3) Recording data on the optical disk and 3D/PG video identifier

a <sub>1</sub>	a <sub>2</sub>	a <sub>3</sub>	a <sub>4</sub>	a <sub>5</sub>	a <sub>6</sub>	a <sub>7</sub>	a <sub>8</sub>	a <sub>9</sub>
R <sub>1</sub>	L <sub>1</sub>	A <sub>1</sub>	B <sub>1</sub>	R <sub>2</sub>	L <sub>2</sub>	A <sub>2</sub>	B <sub>2</sub>	R <sub>3</sub>
a <sub>5</sub>	a <sub>6</sub>	a <sub>7</sub>	a <sub>8</sub>	a <sub>9</sub>	a <sub>10</sub>			
3D identifier B	R'01"	L'10"	"00"	"00"	R'01"	L'10"		
60a	61a	61b	61c	61d	61e			
	60b							

L) 3D video reproduction—mode reproduction sequence

(4) 3D video reproduction—mode reproduction sequence

	Reproduction (a5)	Reproduction (a6)	Jump to a5	Reproduction (a9)	Reproduction (a10)	Jump to a9	Reproduction
--	----------------------	----------------------	------------	----------------------	-----------------------	------------	--------------

FIG. 15


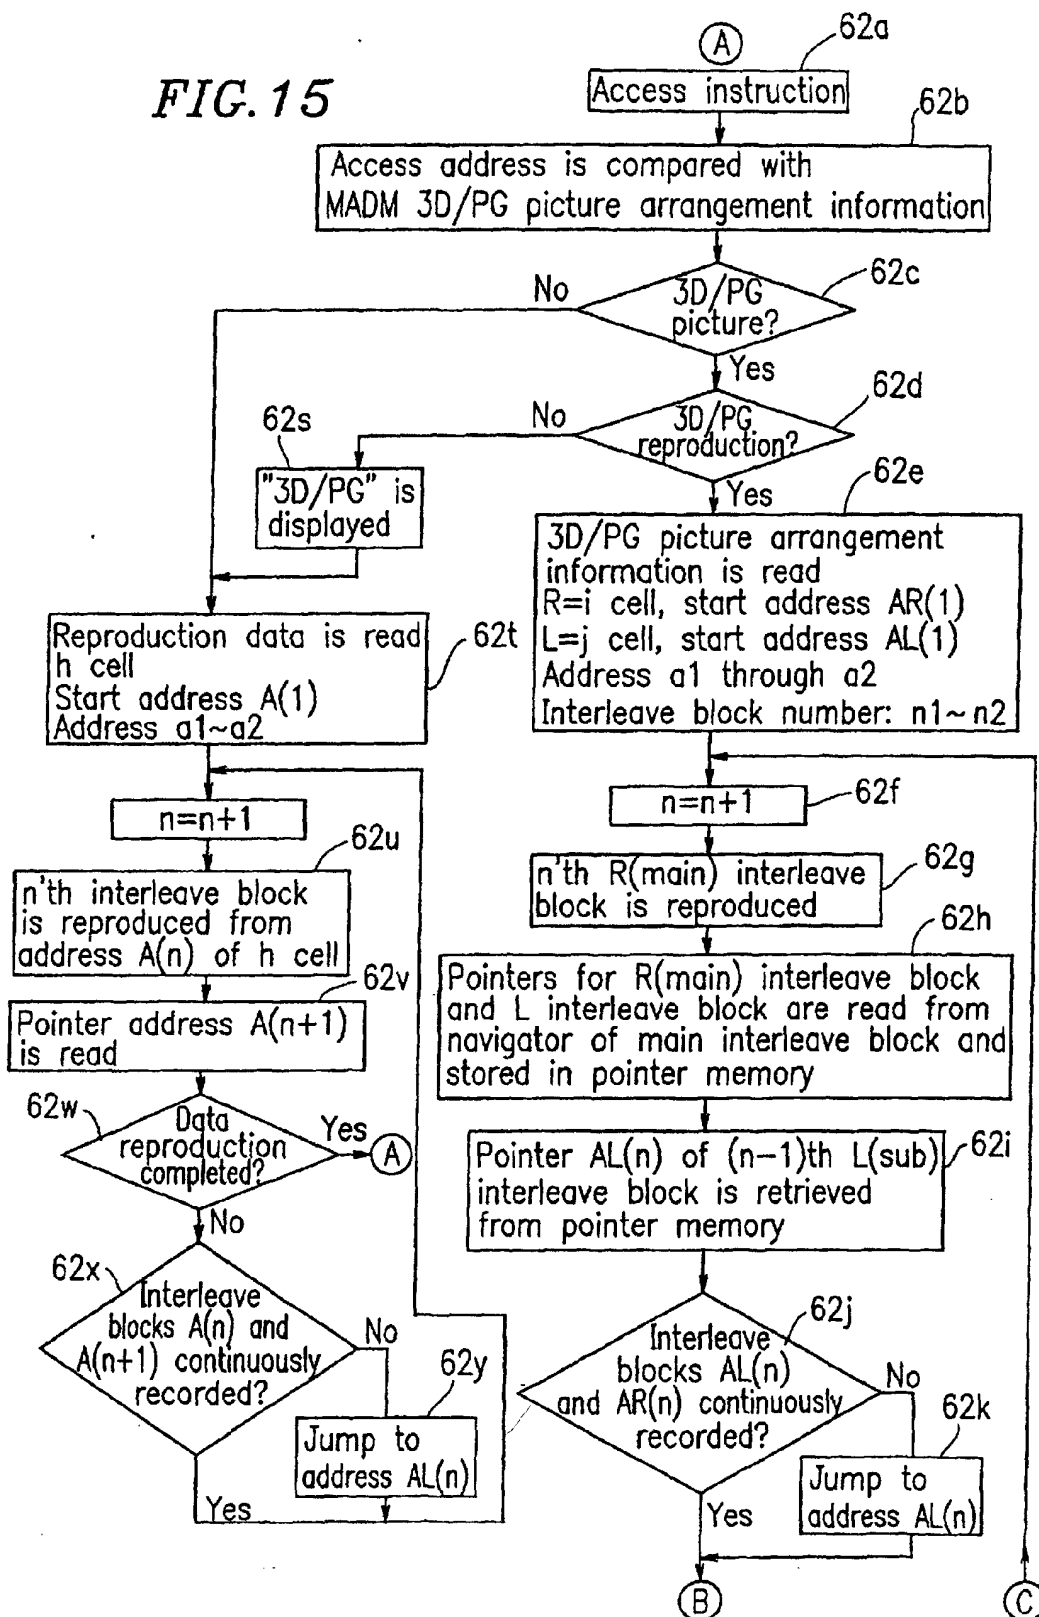


FIG. 16

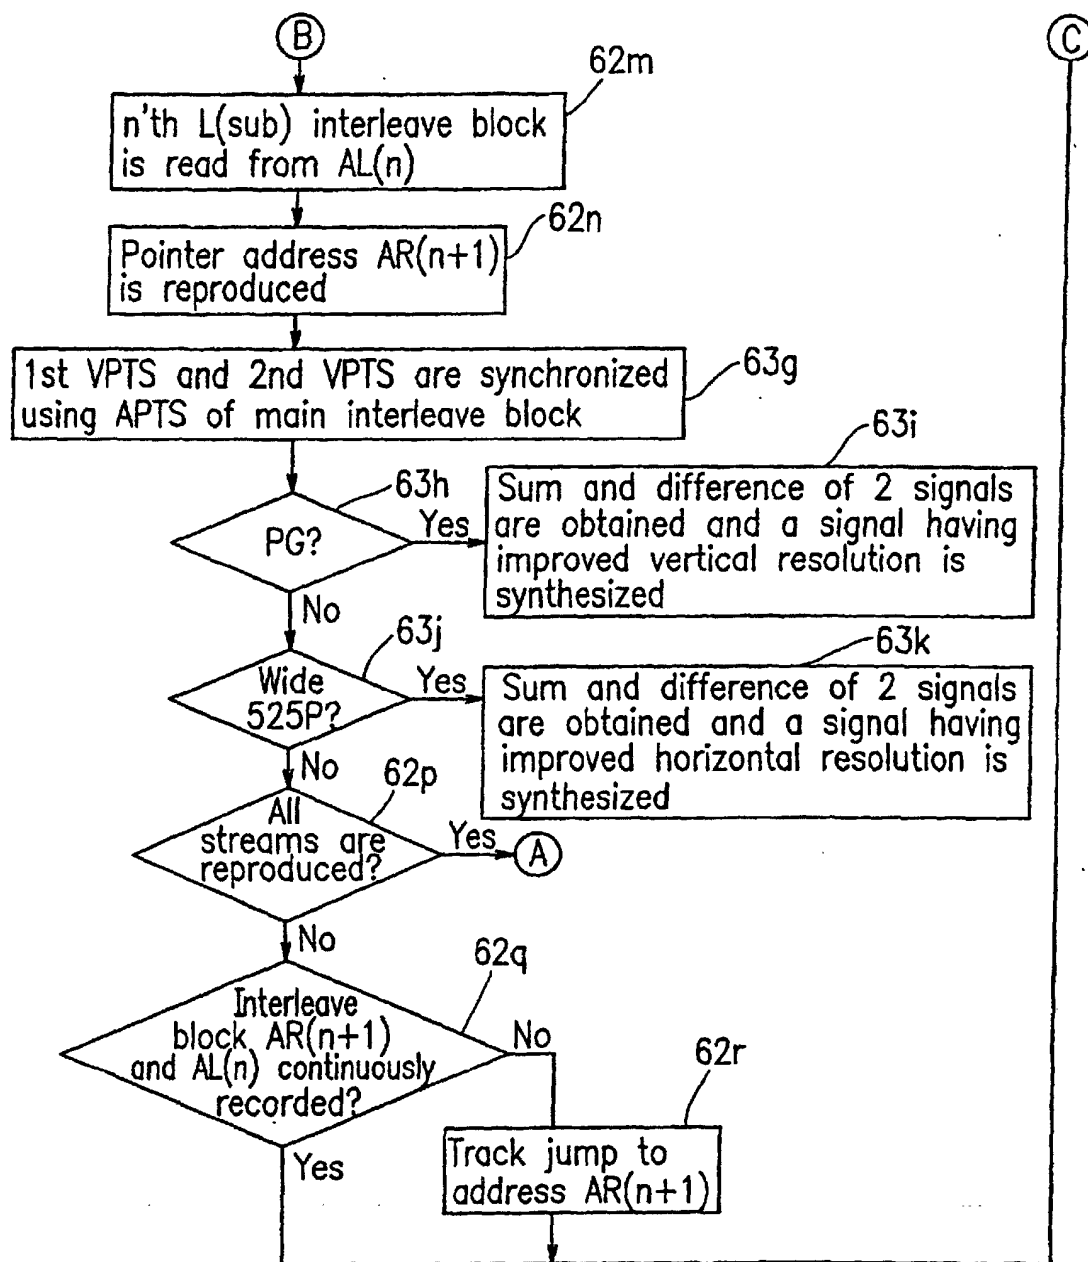

*FIG. 17*

## Operation flowchart of 3D picture reproduction apparatus

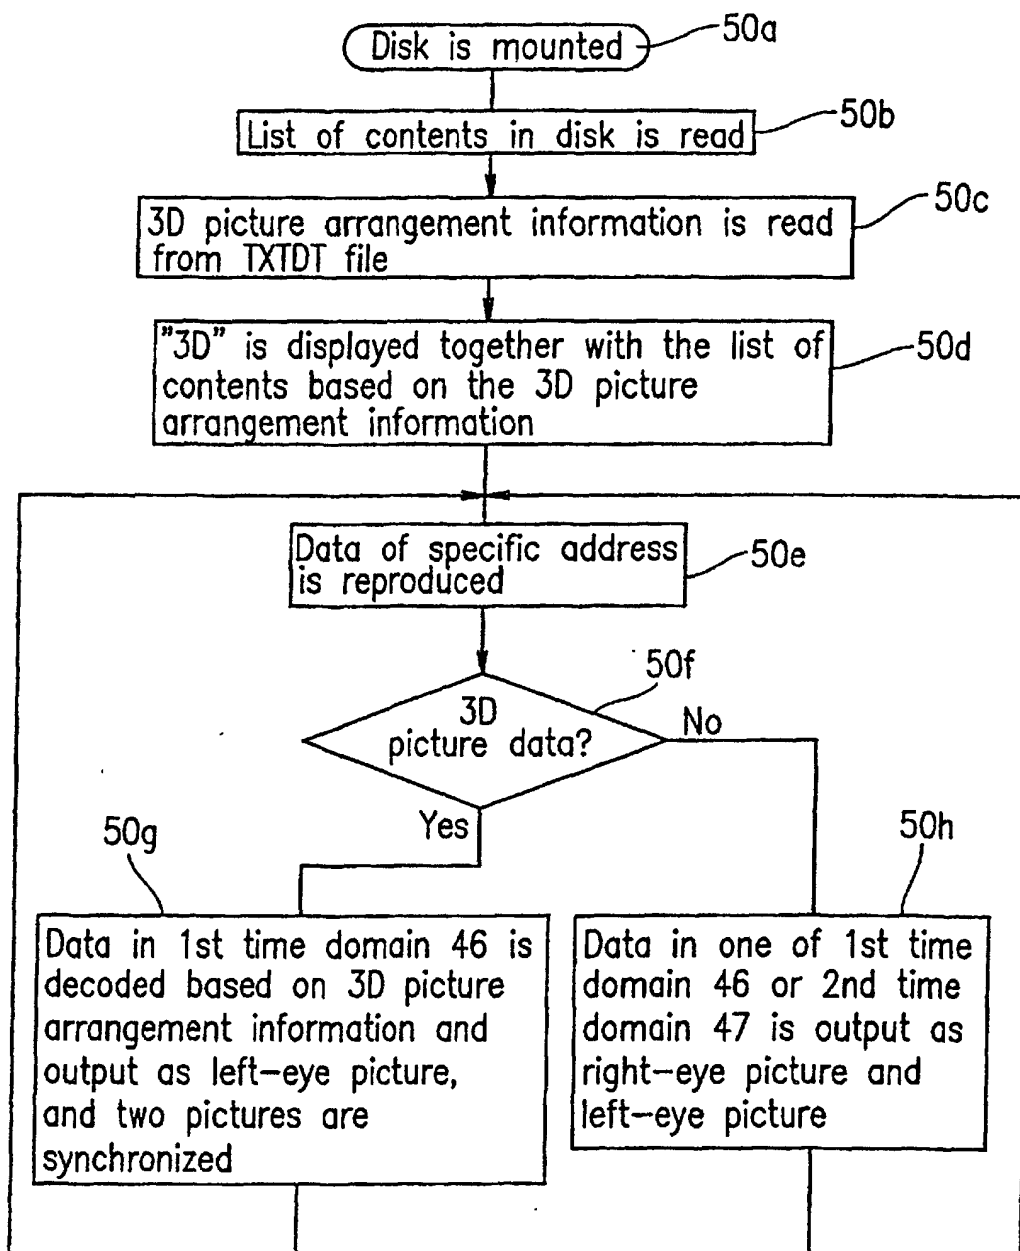


FIG. 18

3D/PG video logical arrangement table

53 51  
File

Logical hierarchy												
Video title layer (VTS)	Title 1											
	001											
	3D/PG cell and non-3D/PG cell											
(Part of video title layer) (PVT)	Chapter number											
	1											
	001											
Cell layer (Cell)	Cell number											
	1	2	3	4	5	6	7	1	2			
	1-R	1-L	2-R	2-L	00	00						



FIG. 19

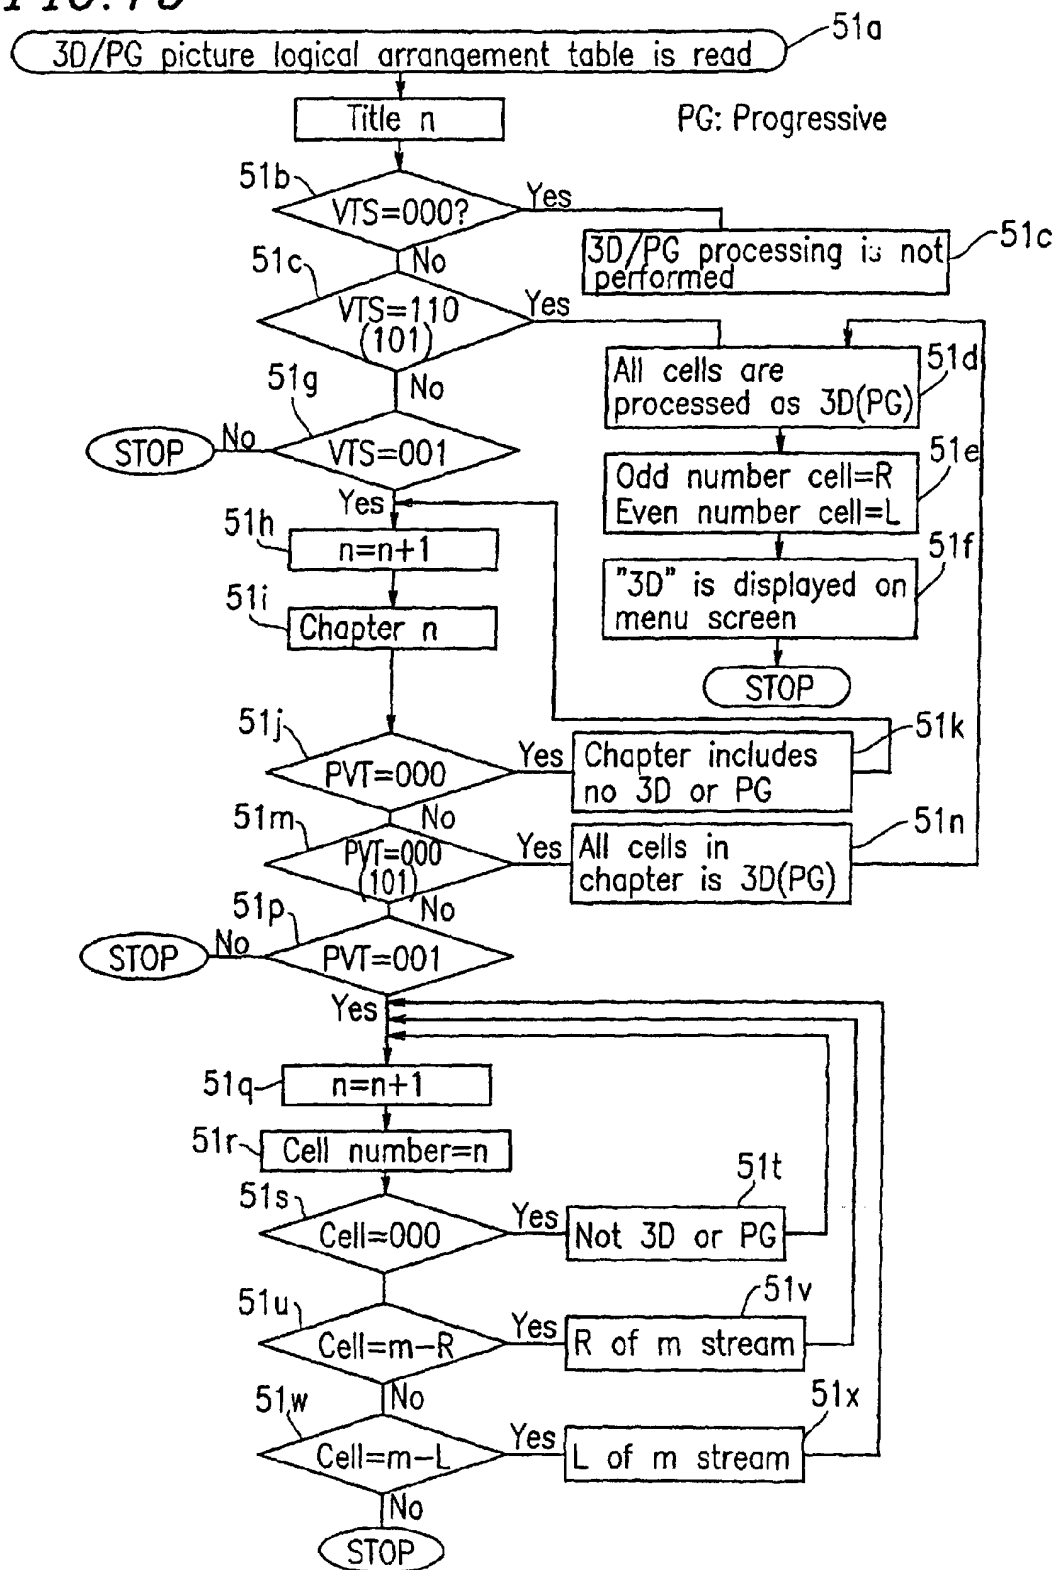


FIG. 20

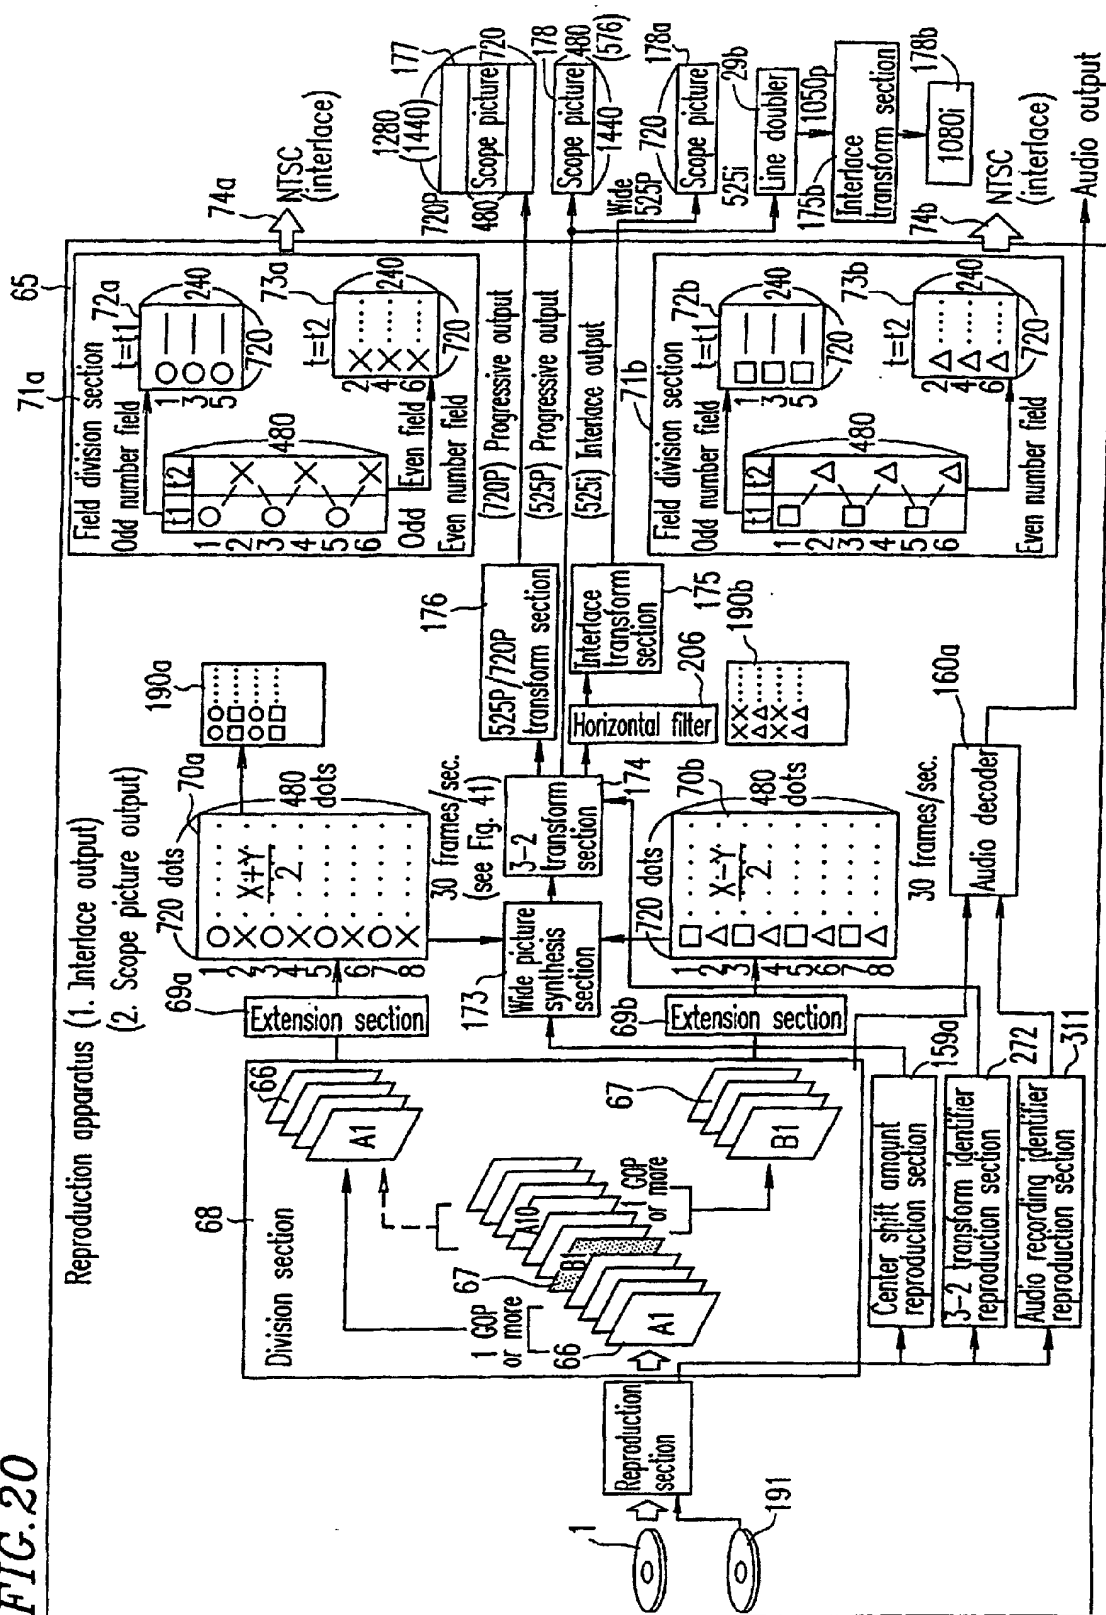


FIG. 21

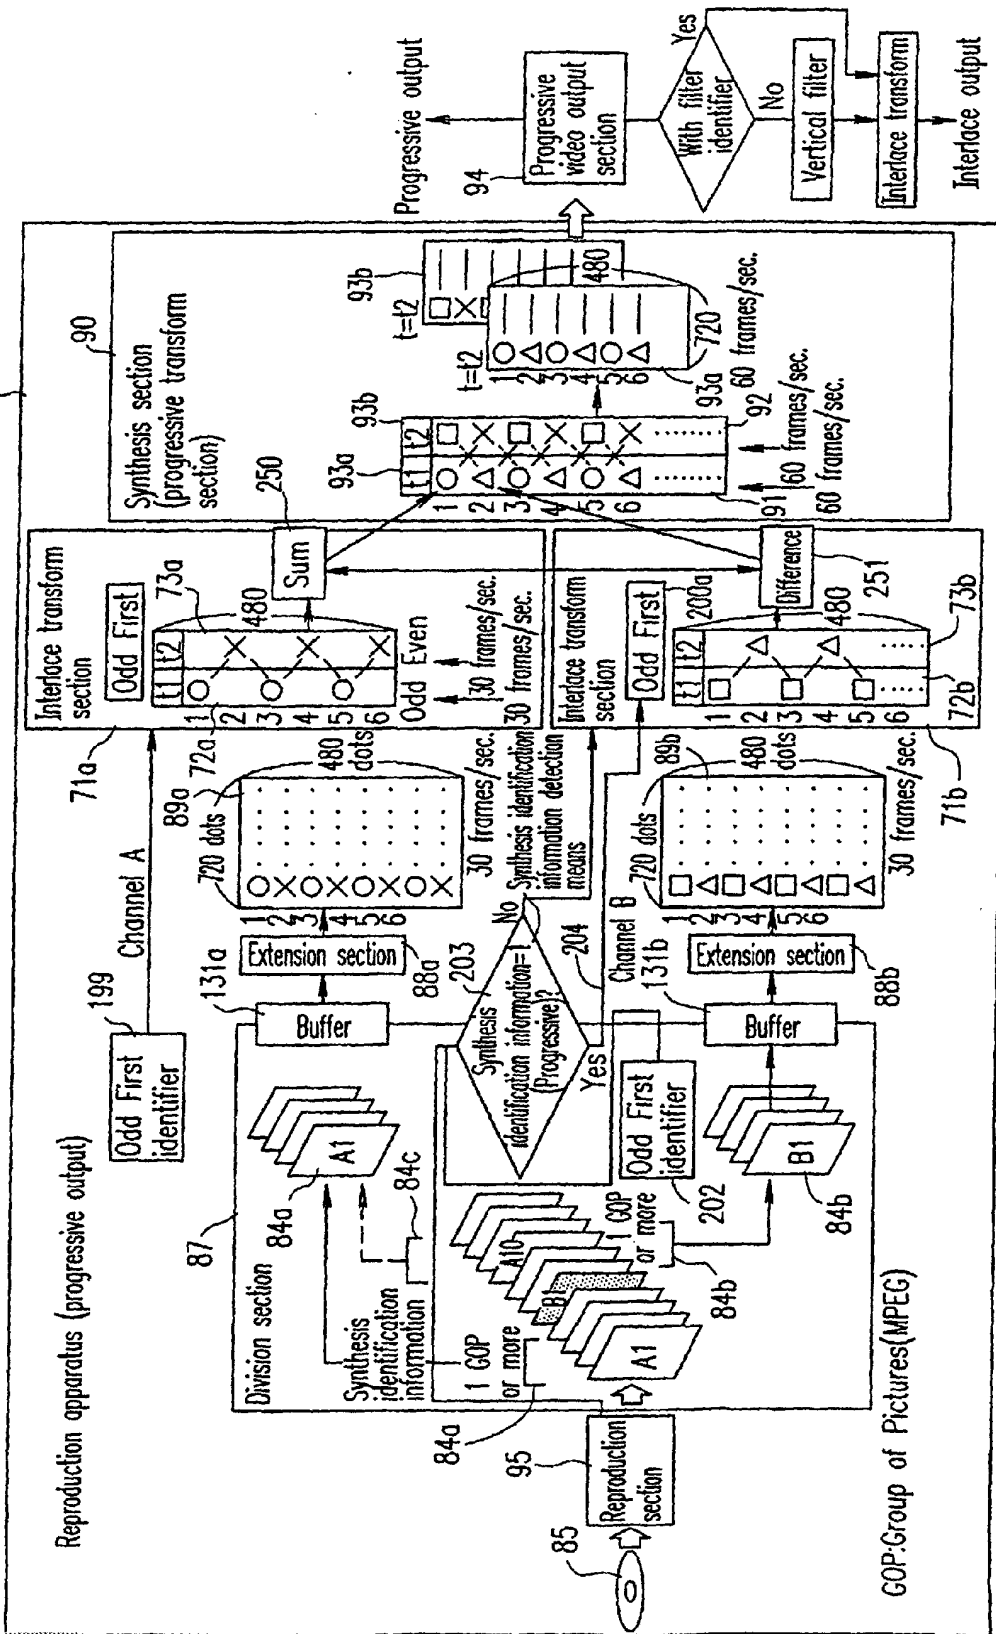


FIG. 22

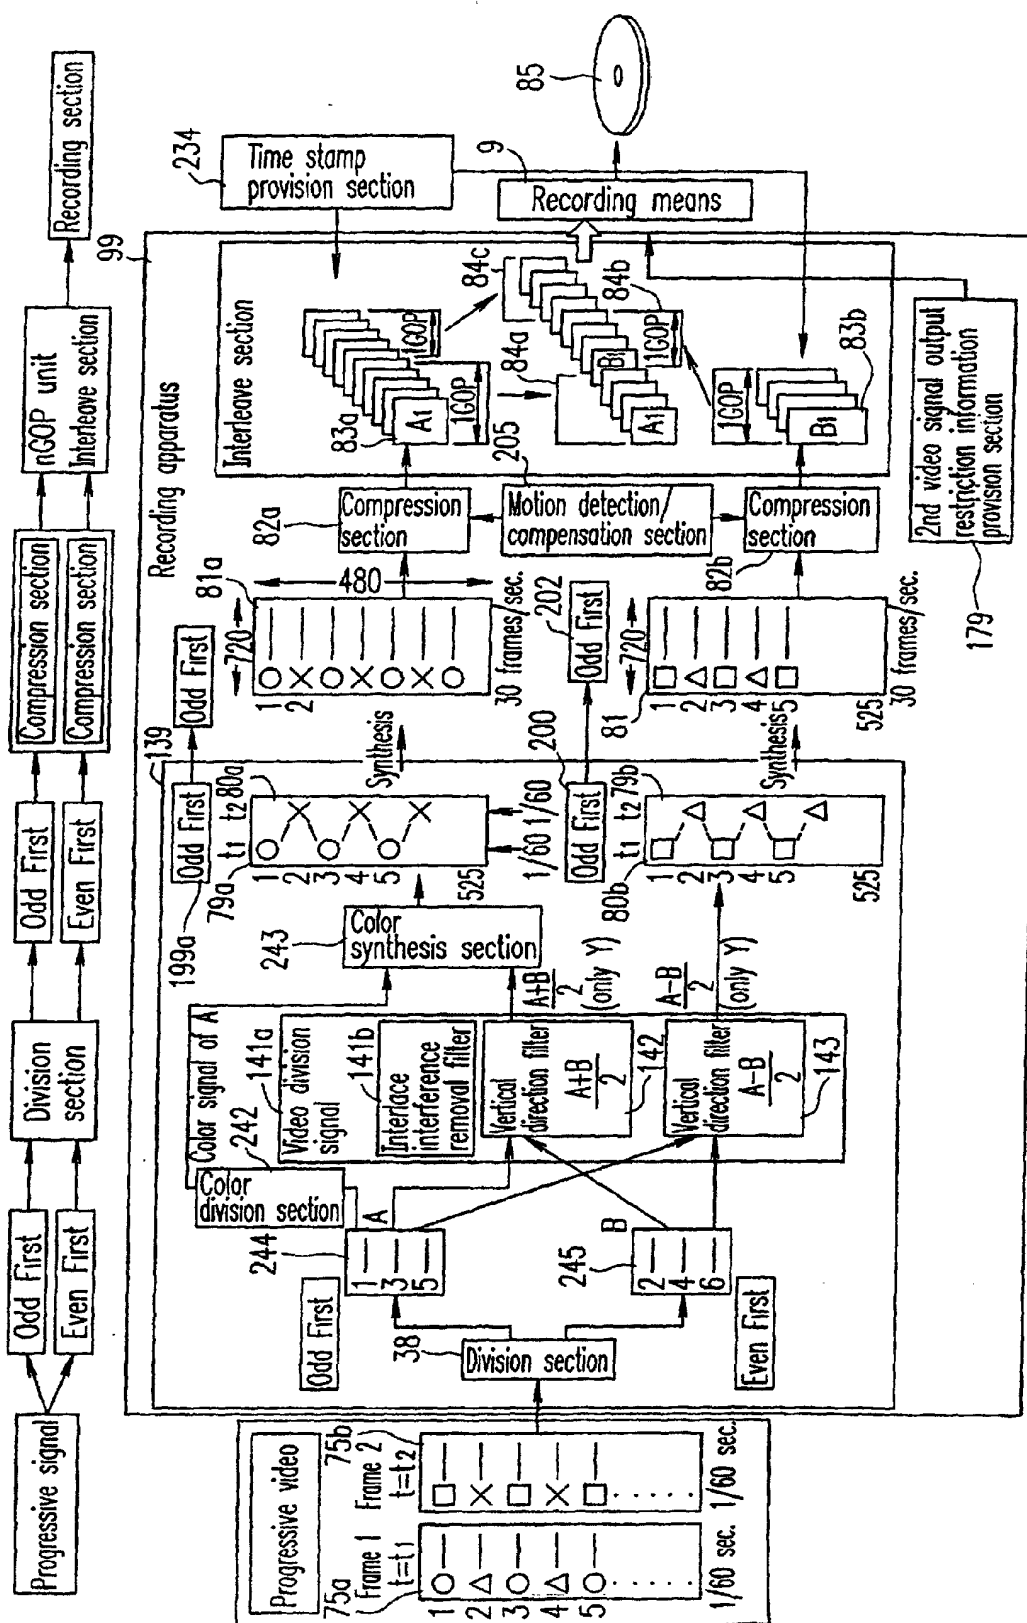


FIG. 23

Principle of multiple angle video data division multiplex recording system (MADM)

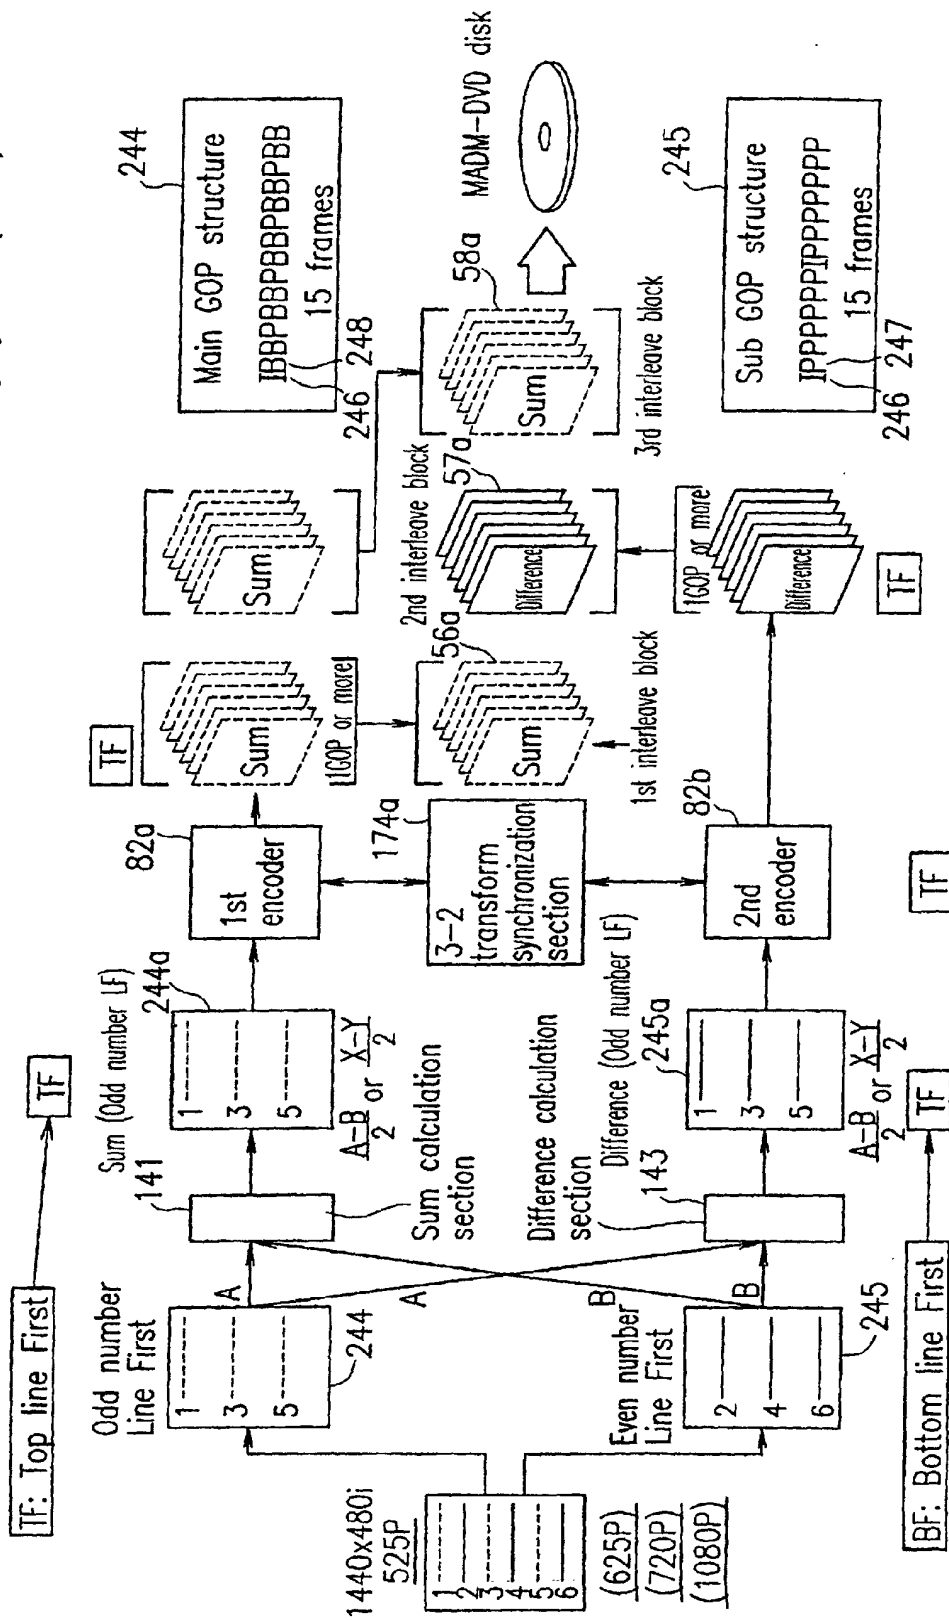


FIG. 24

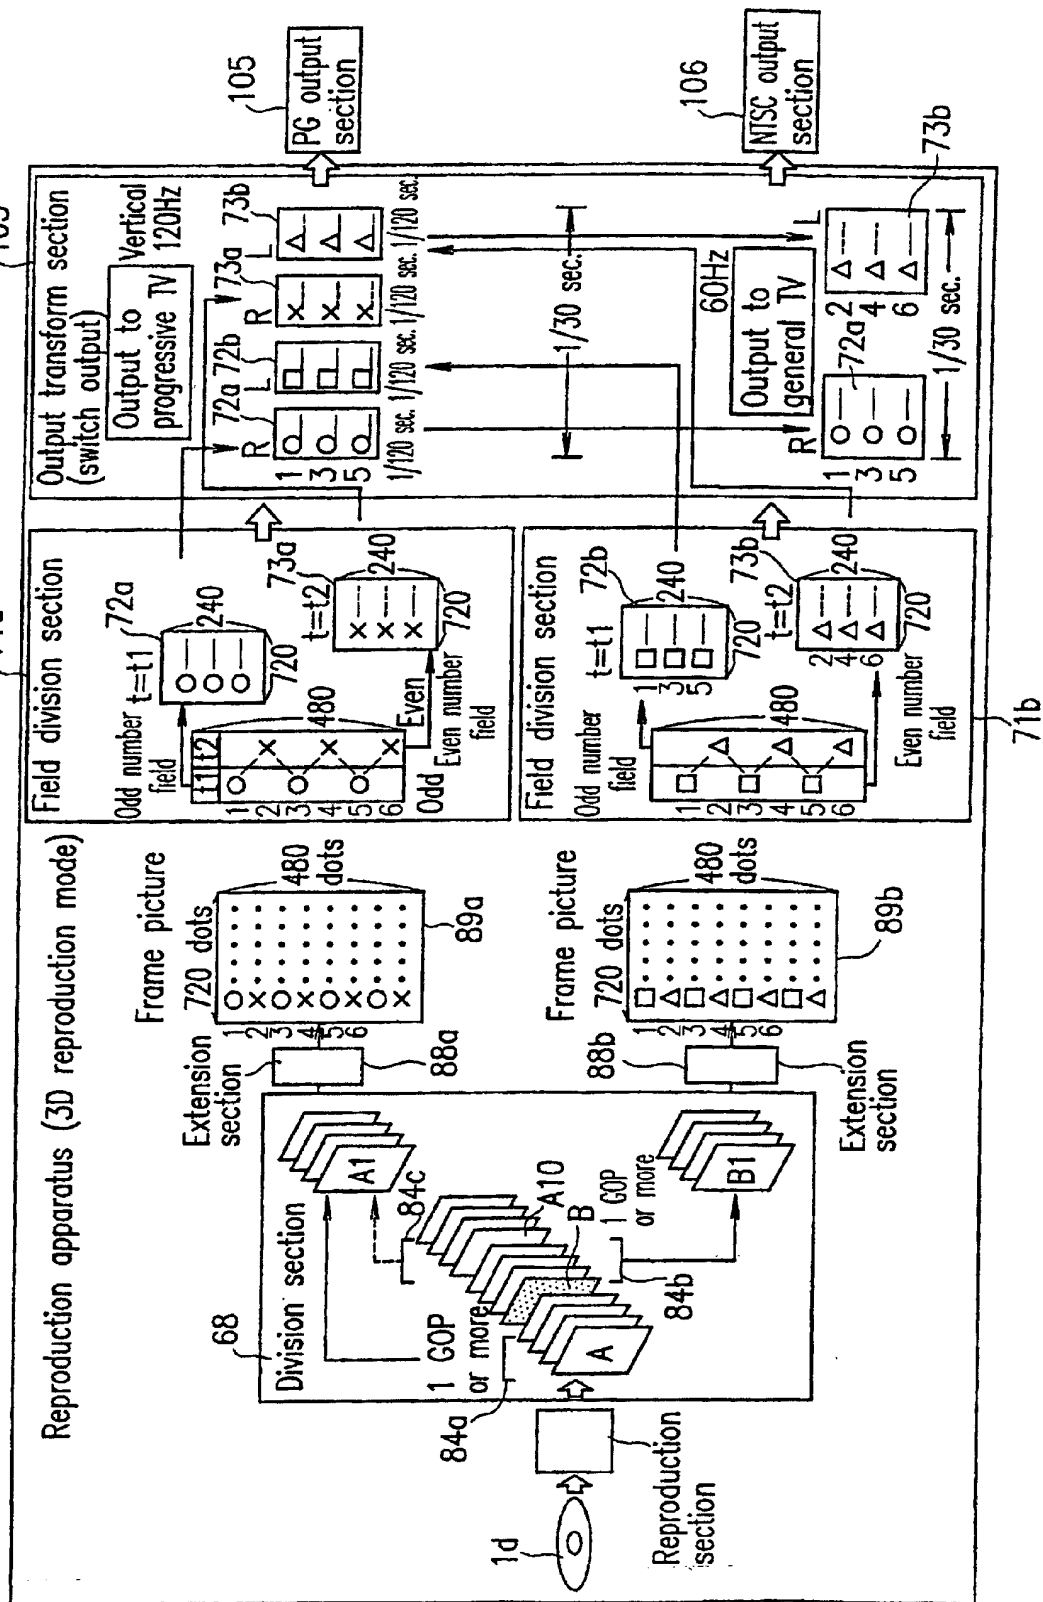


FIG. 25

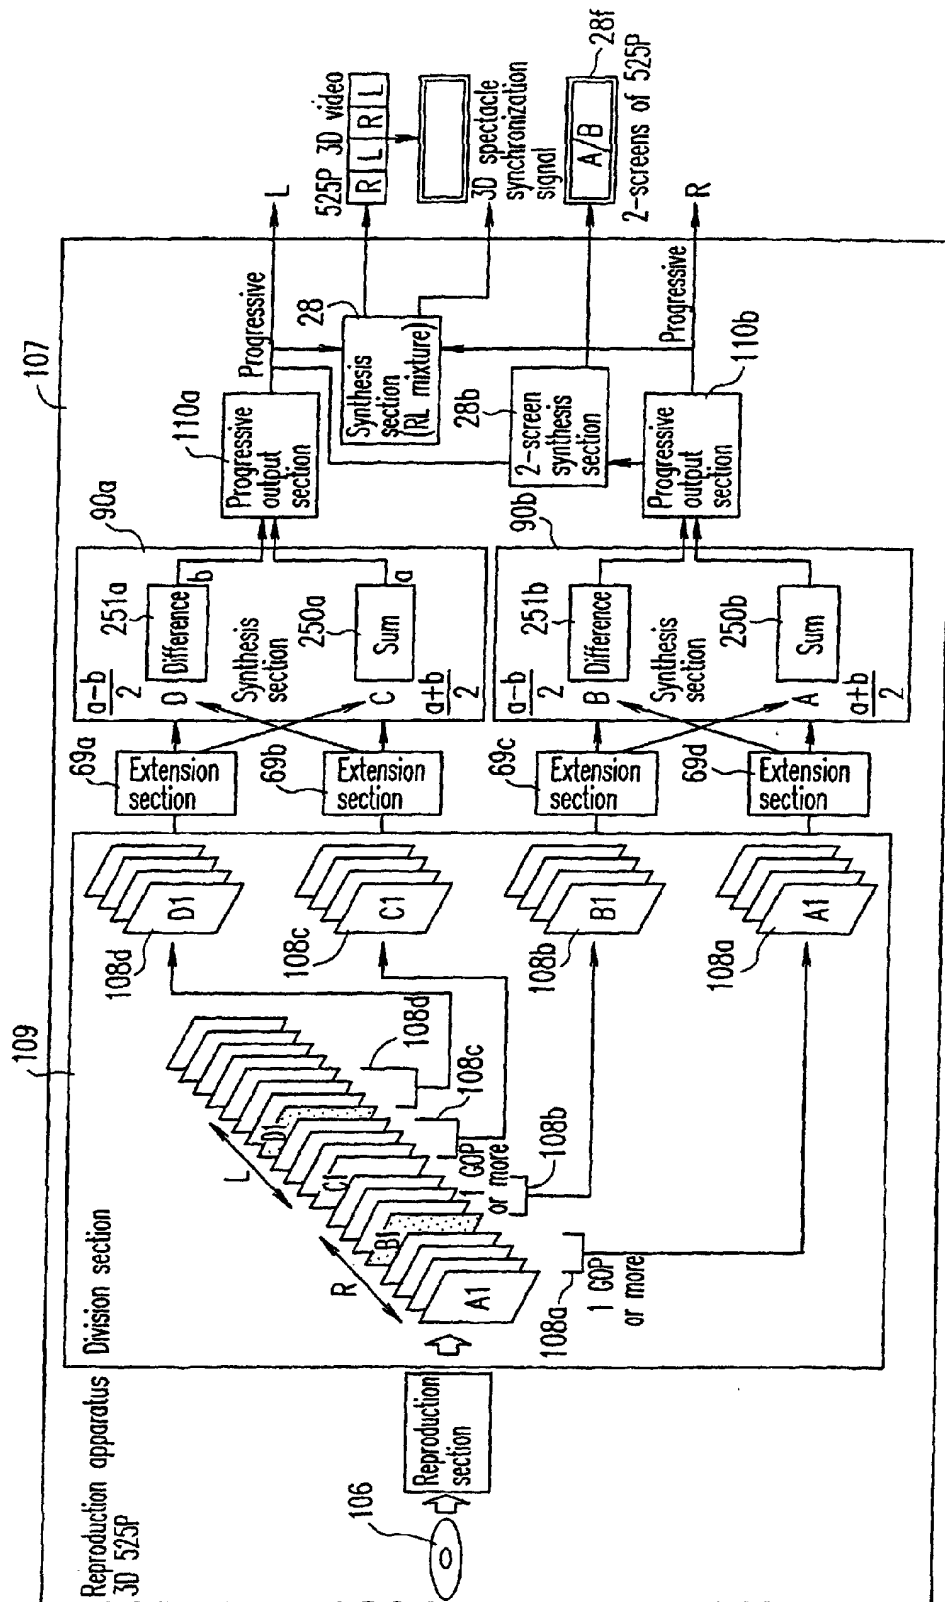


FIG. 26






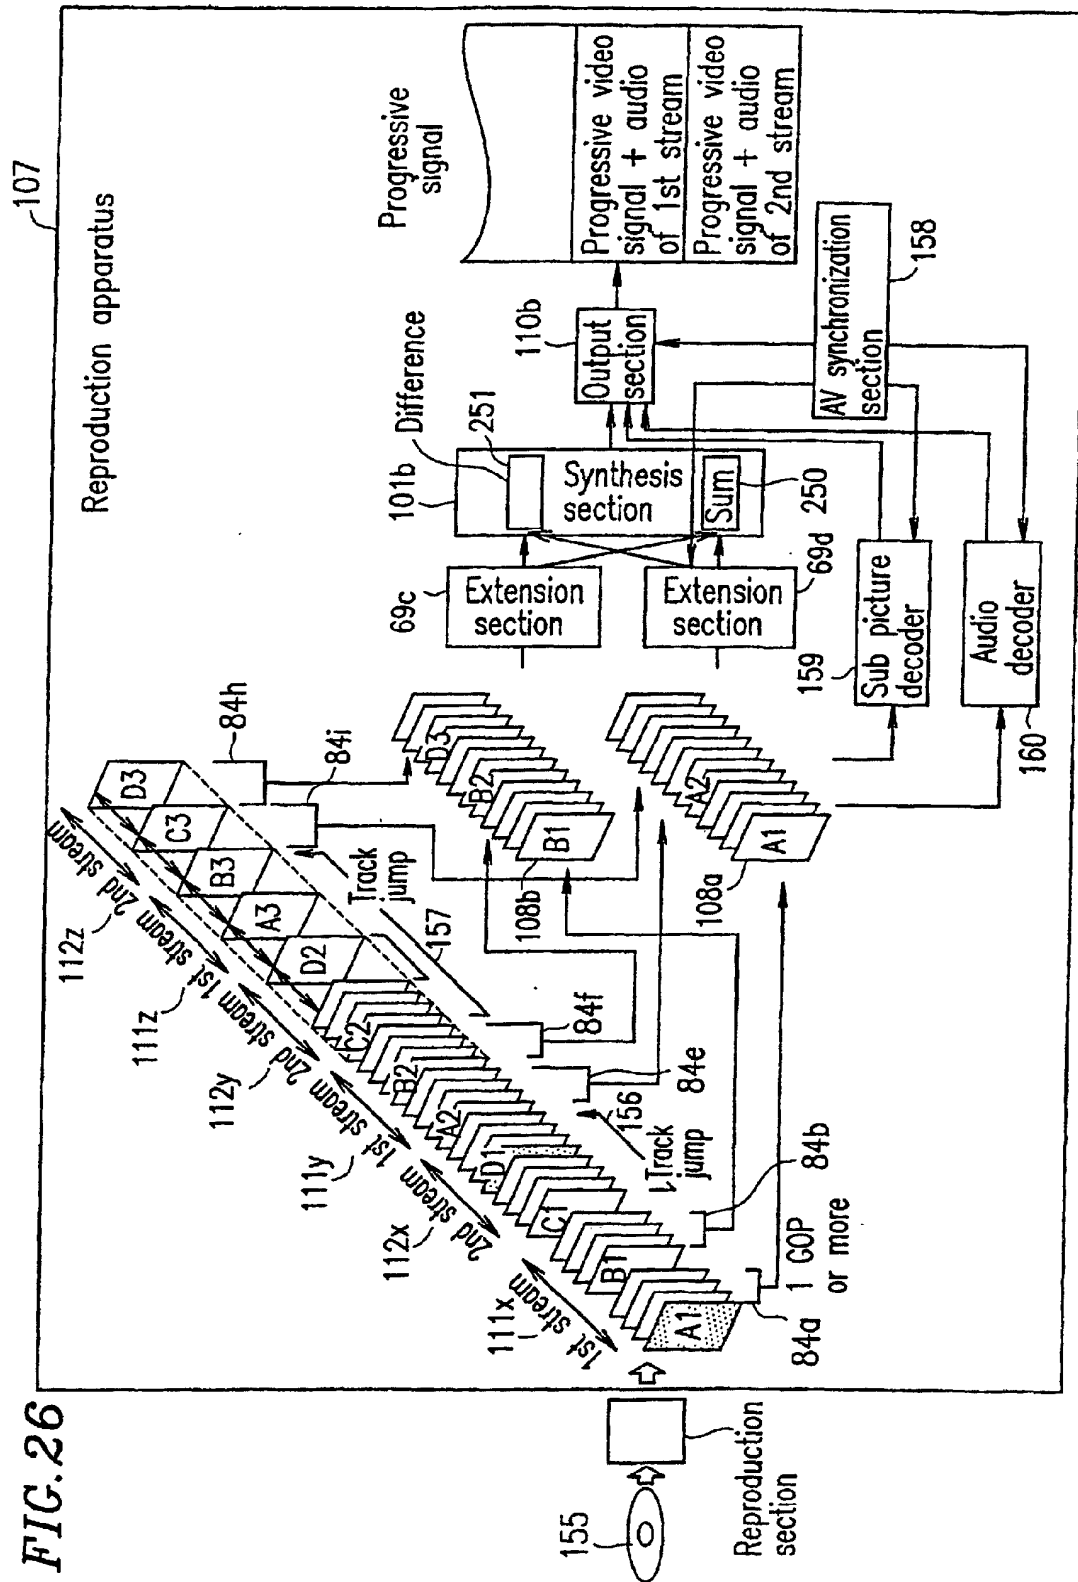FIG. 27

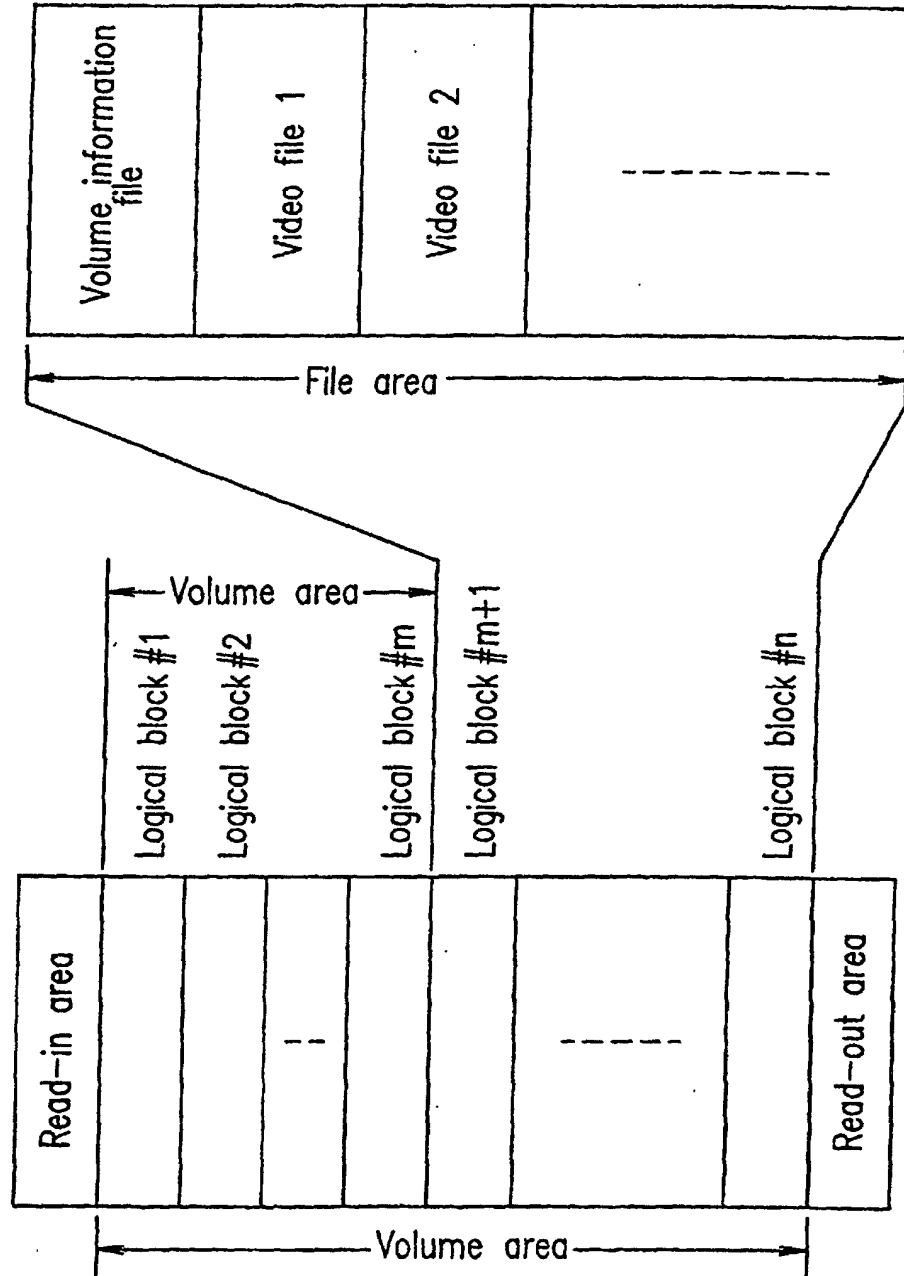


FIG. 28



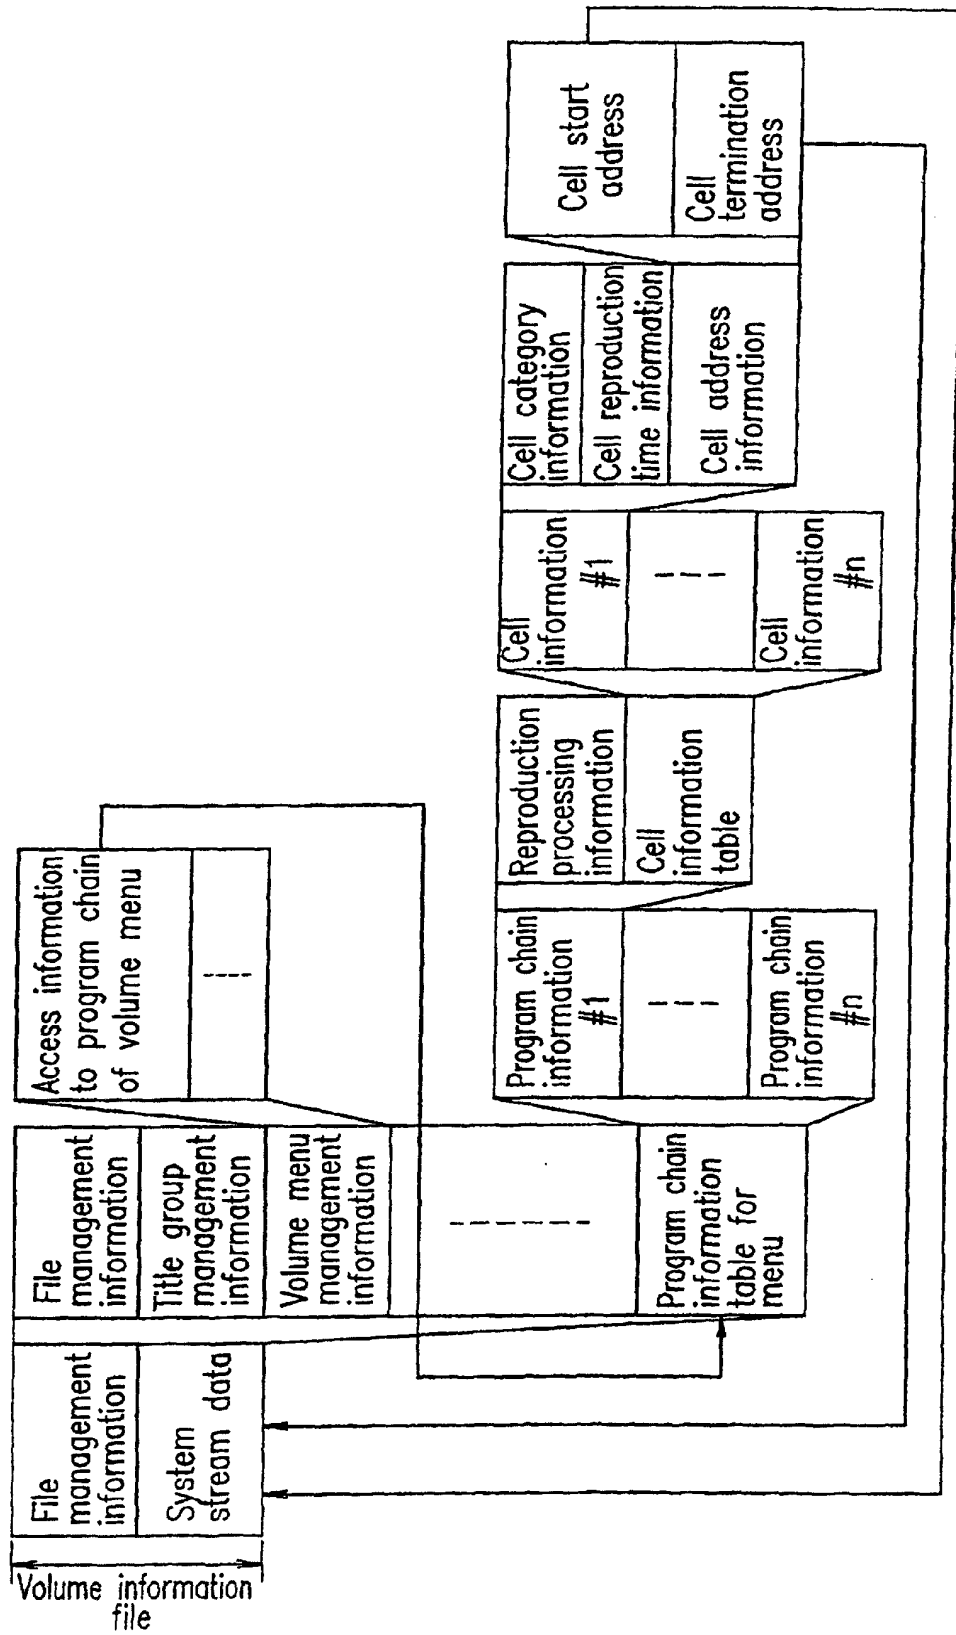


FIG. 29

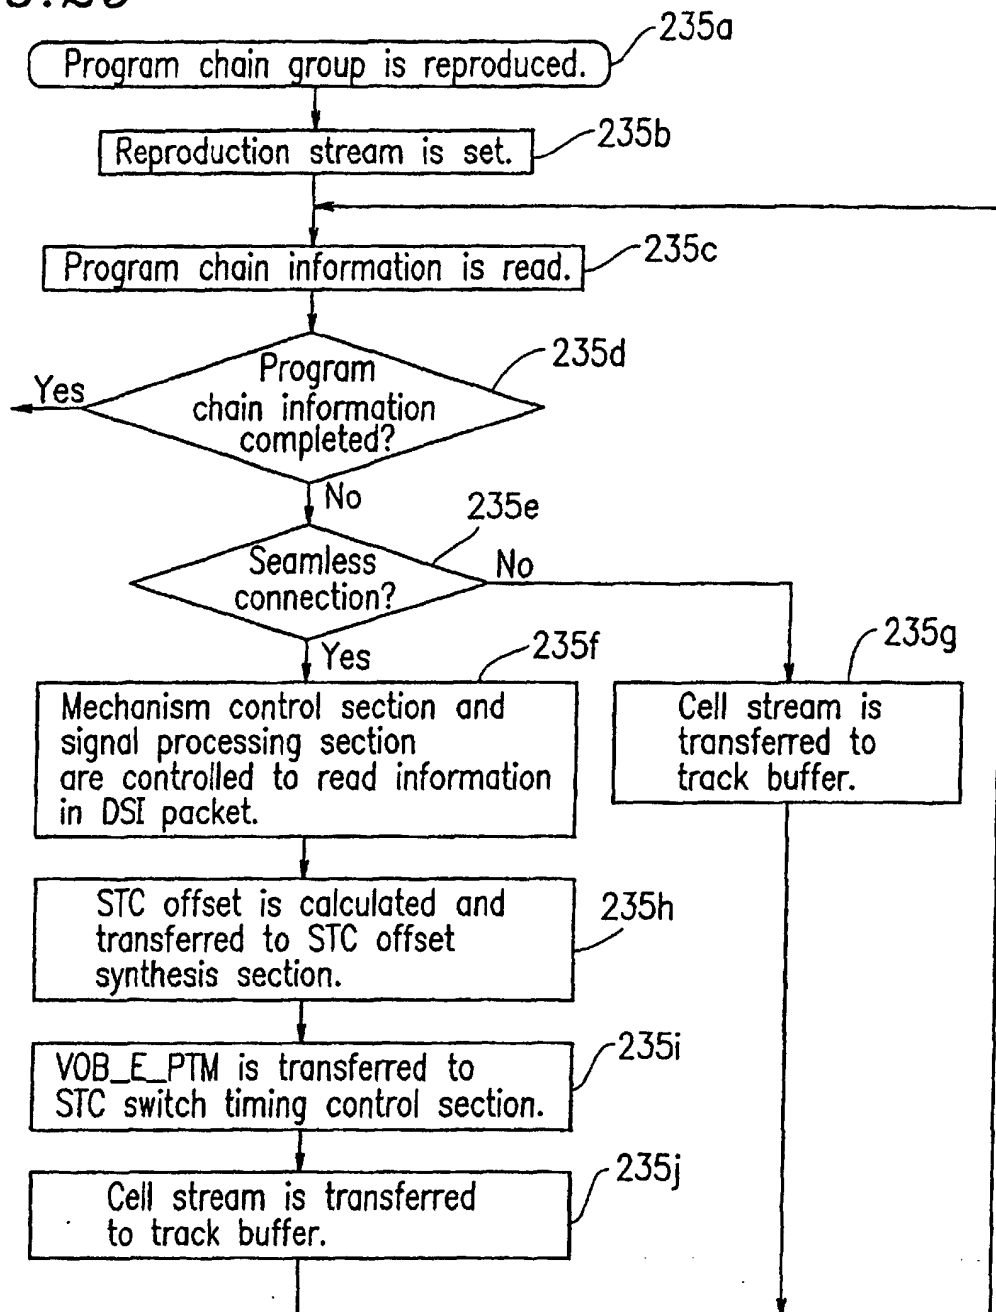

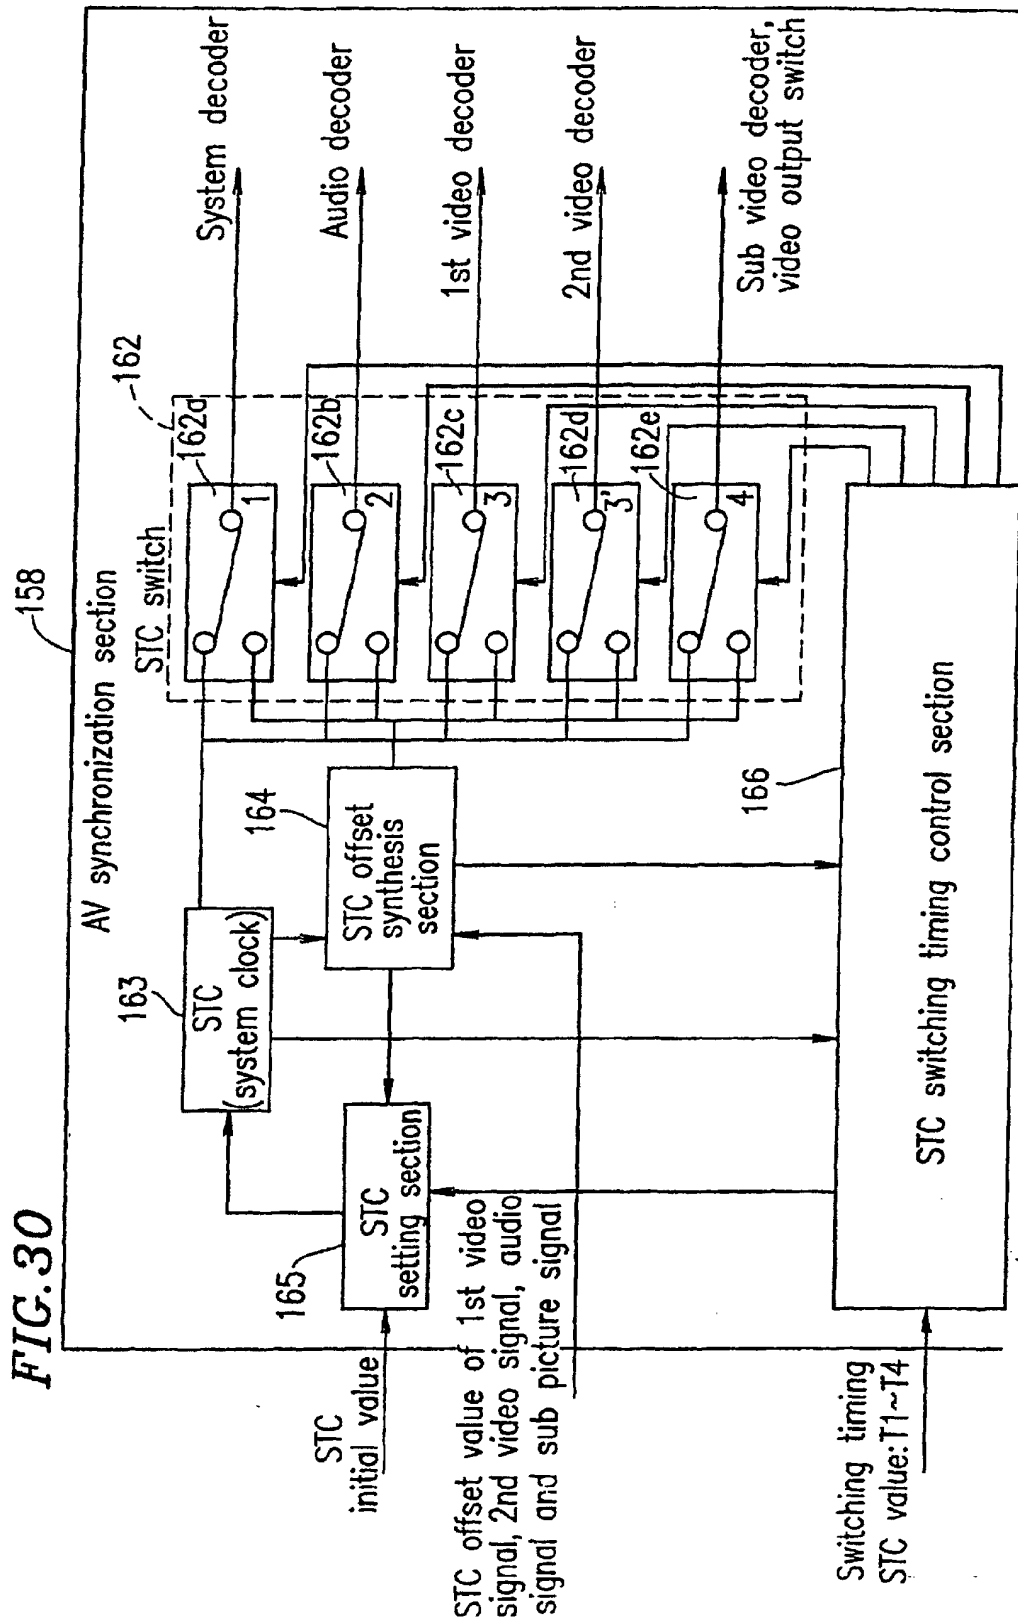




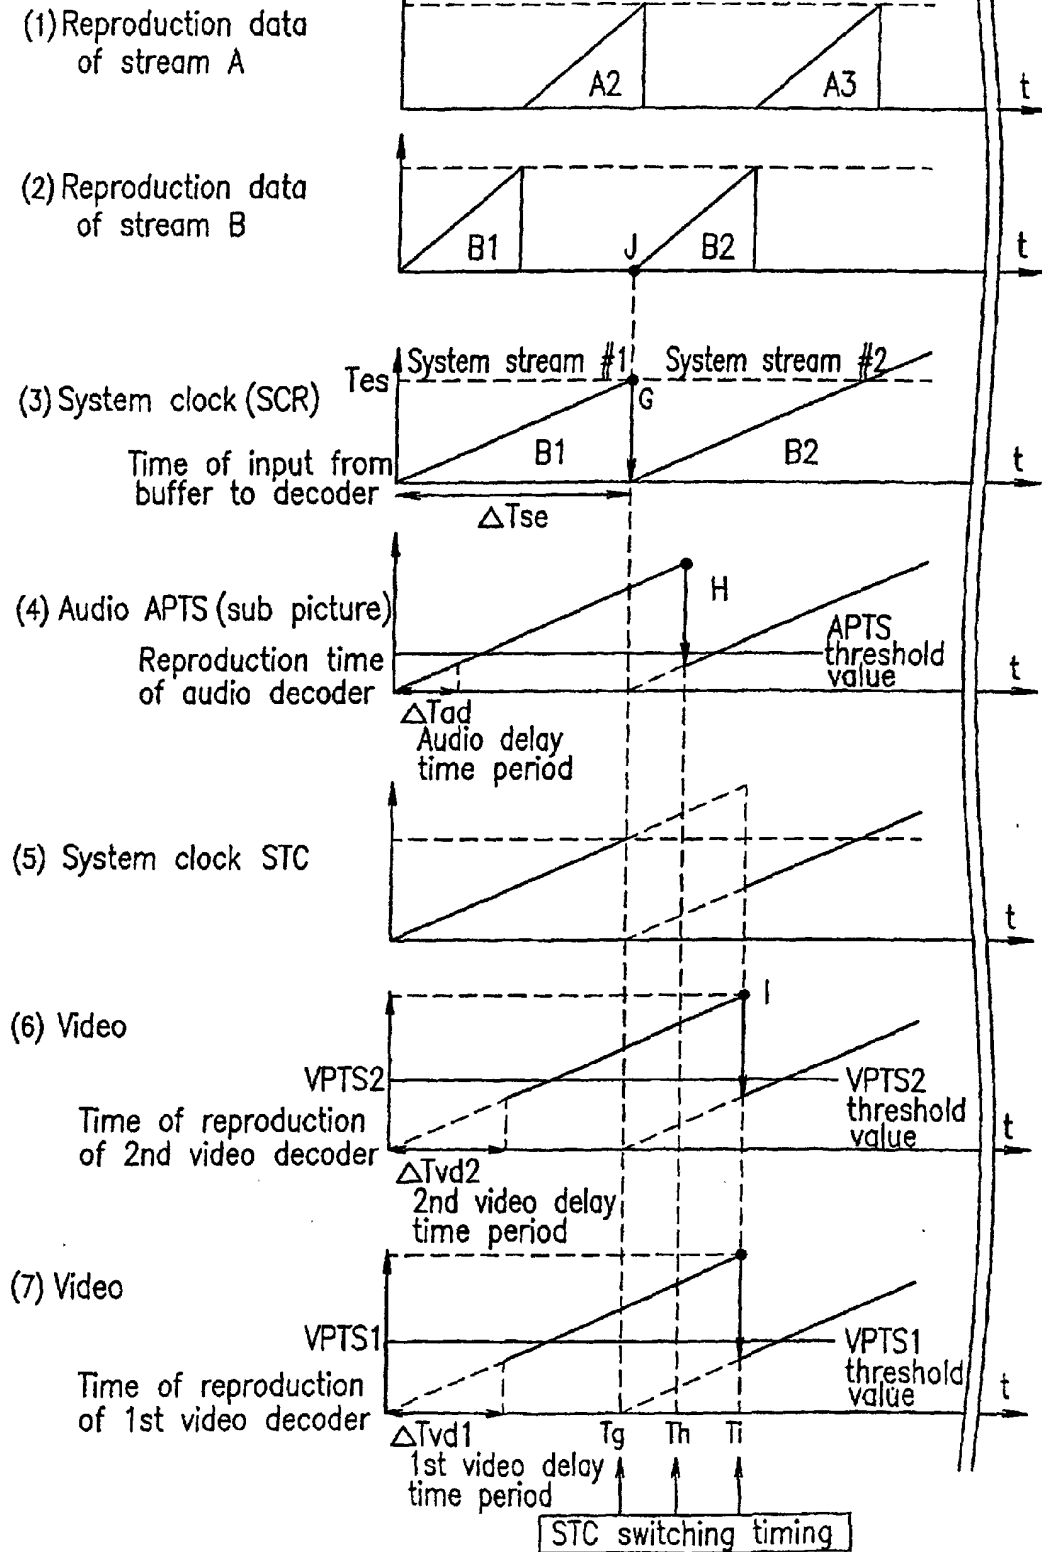
**FIG. 31**

FIG. 32

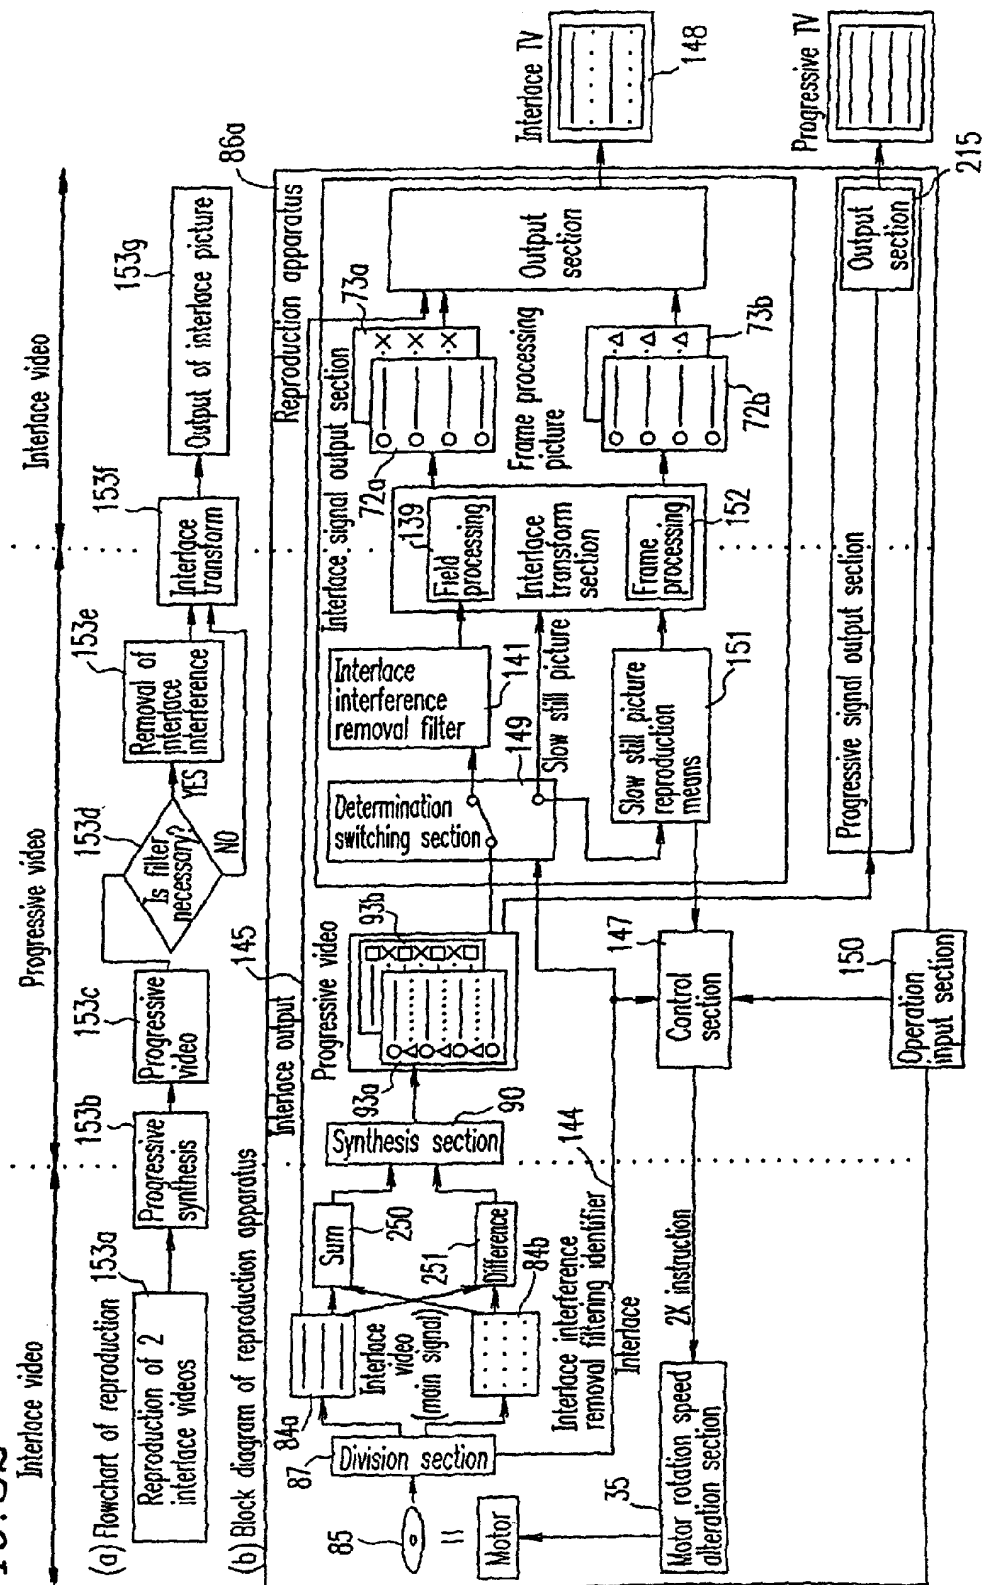

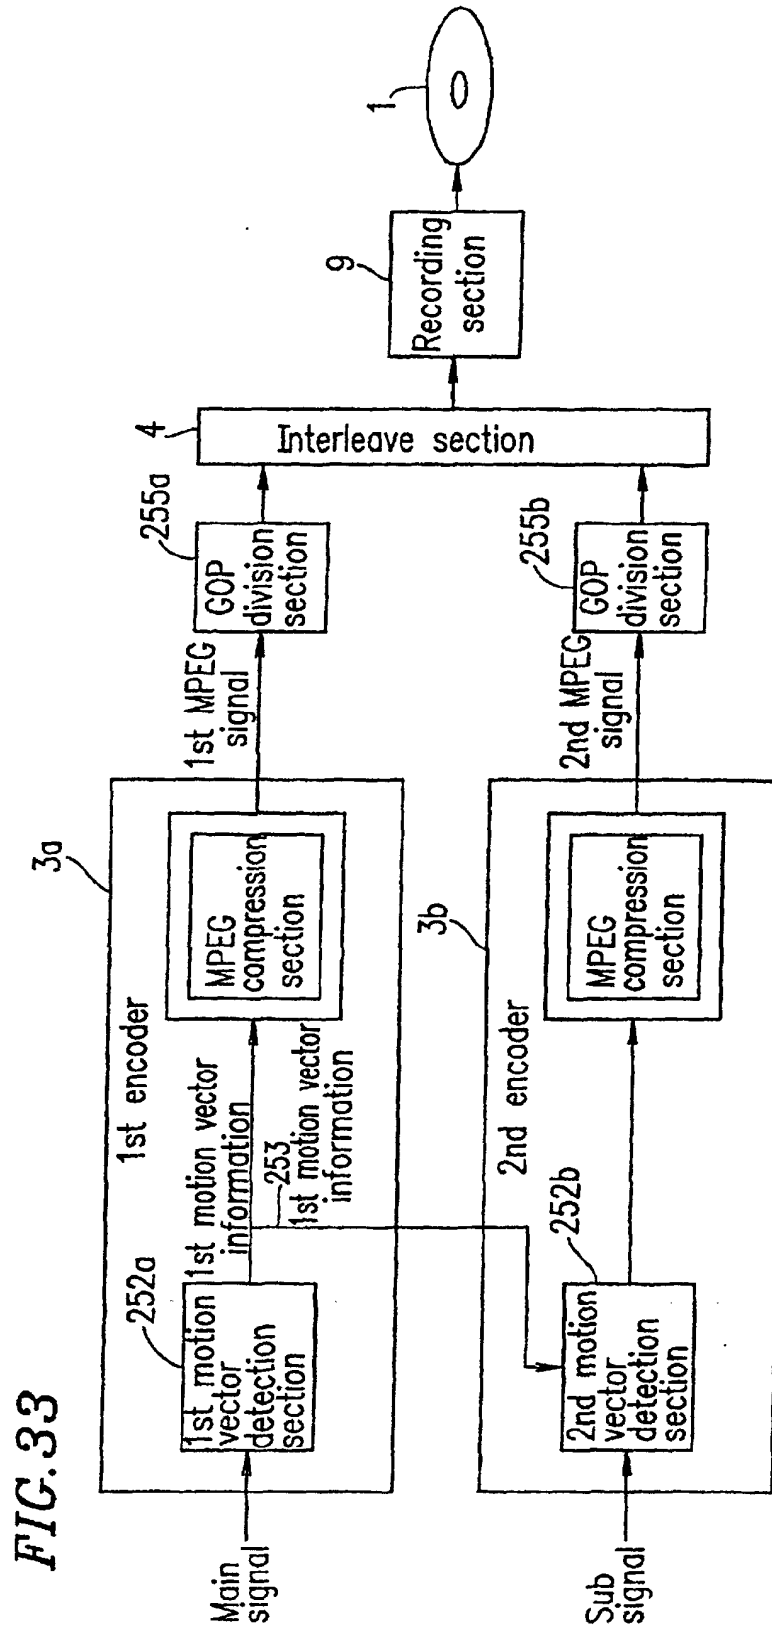


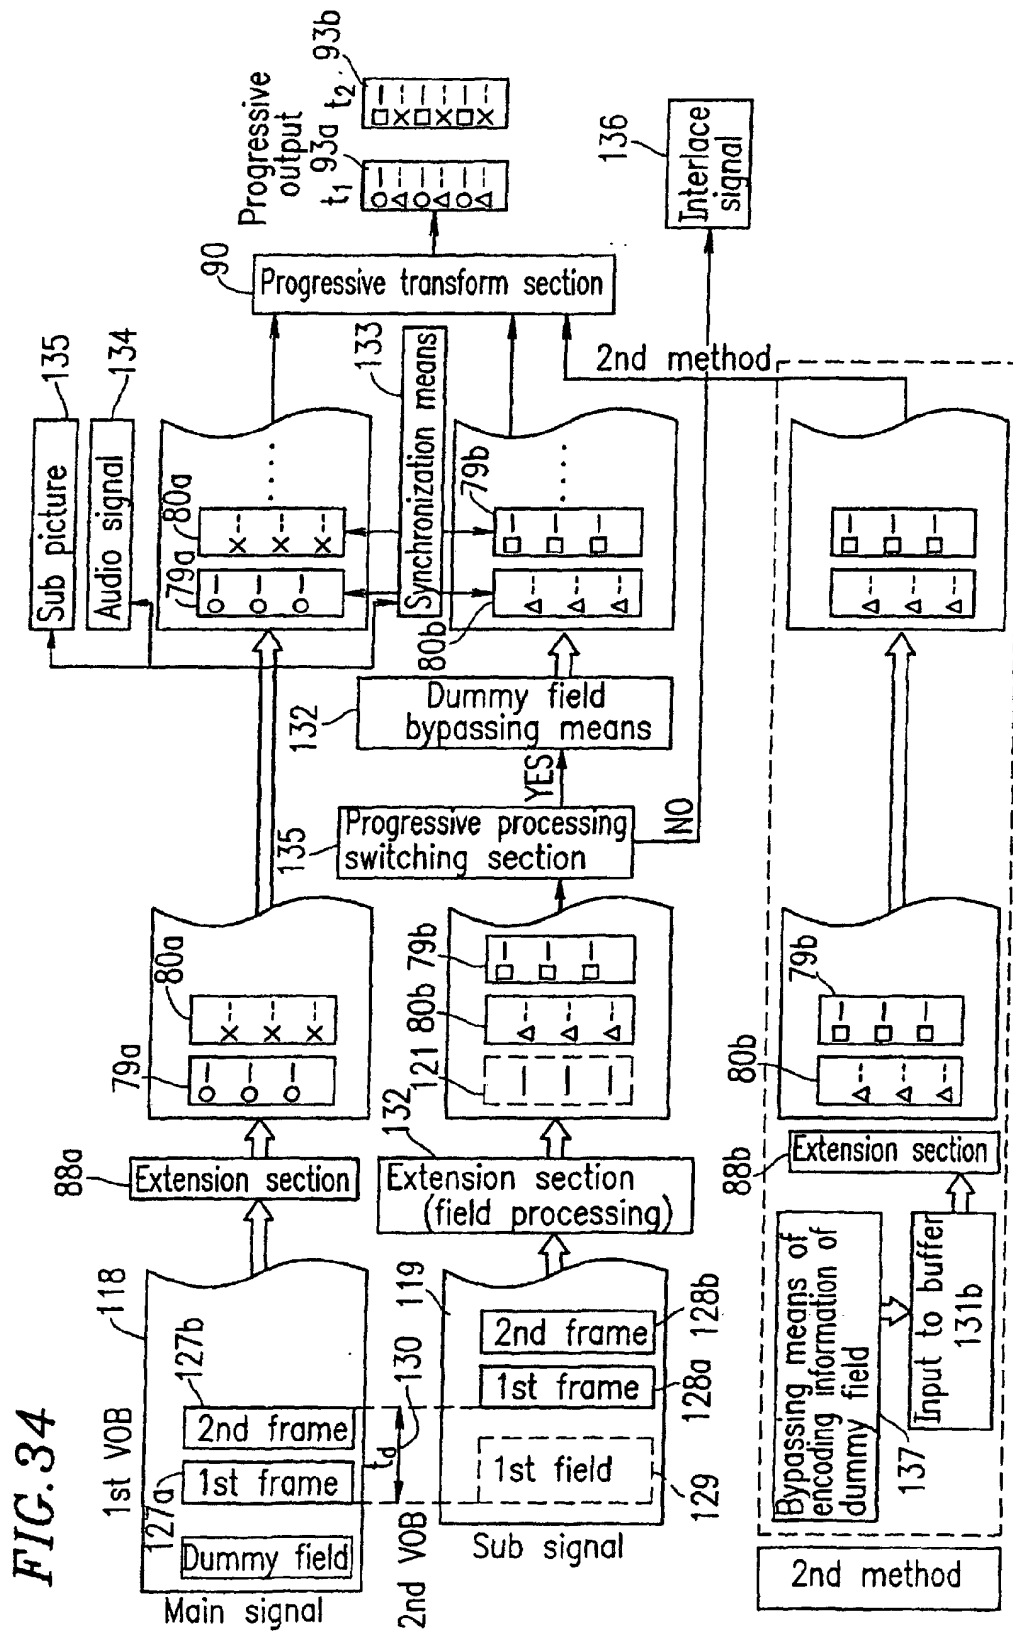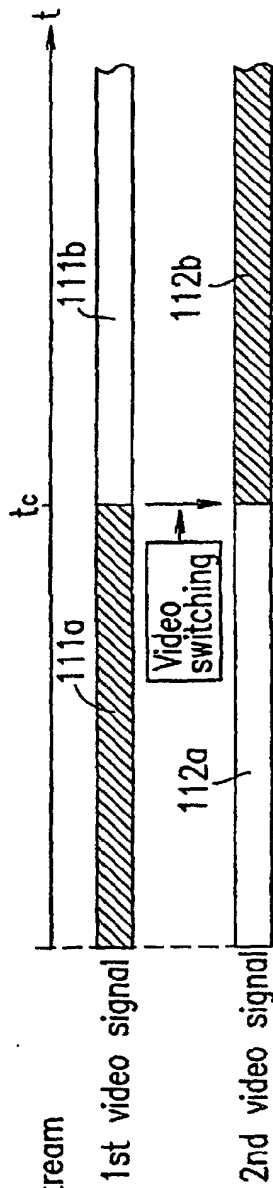




**FIG. 35**

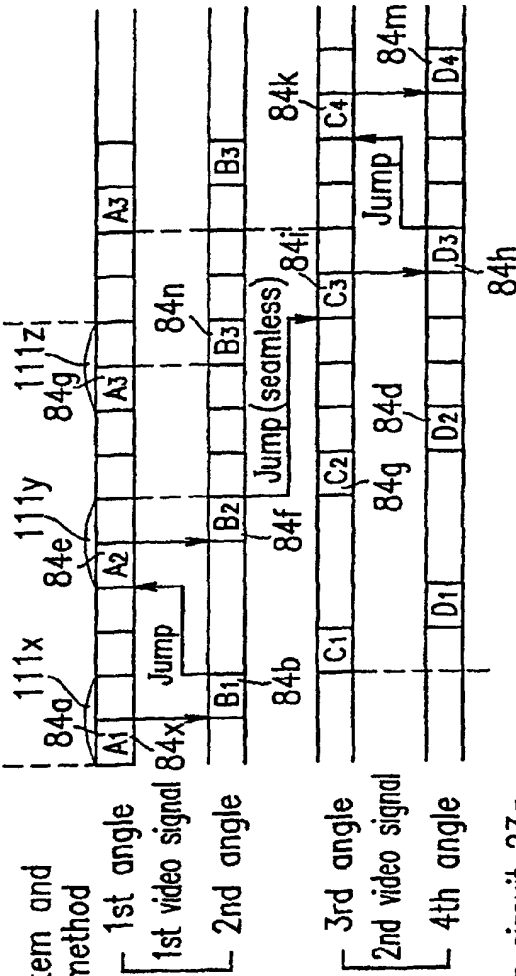
(1) Recording stream



(2) Video to be output



(3) Recording system and reproduction method



(4) Input to buffer circuit 23a



23b input



FIG. 36


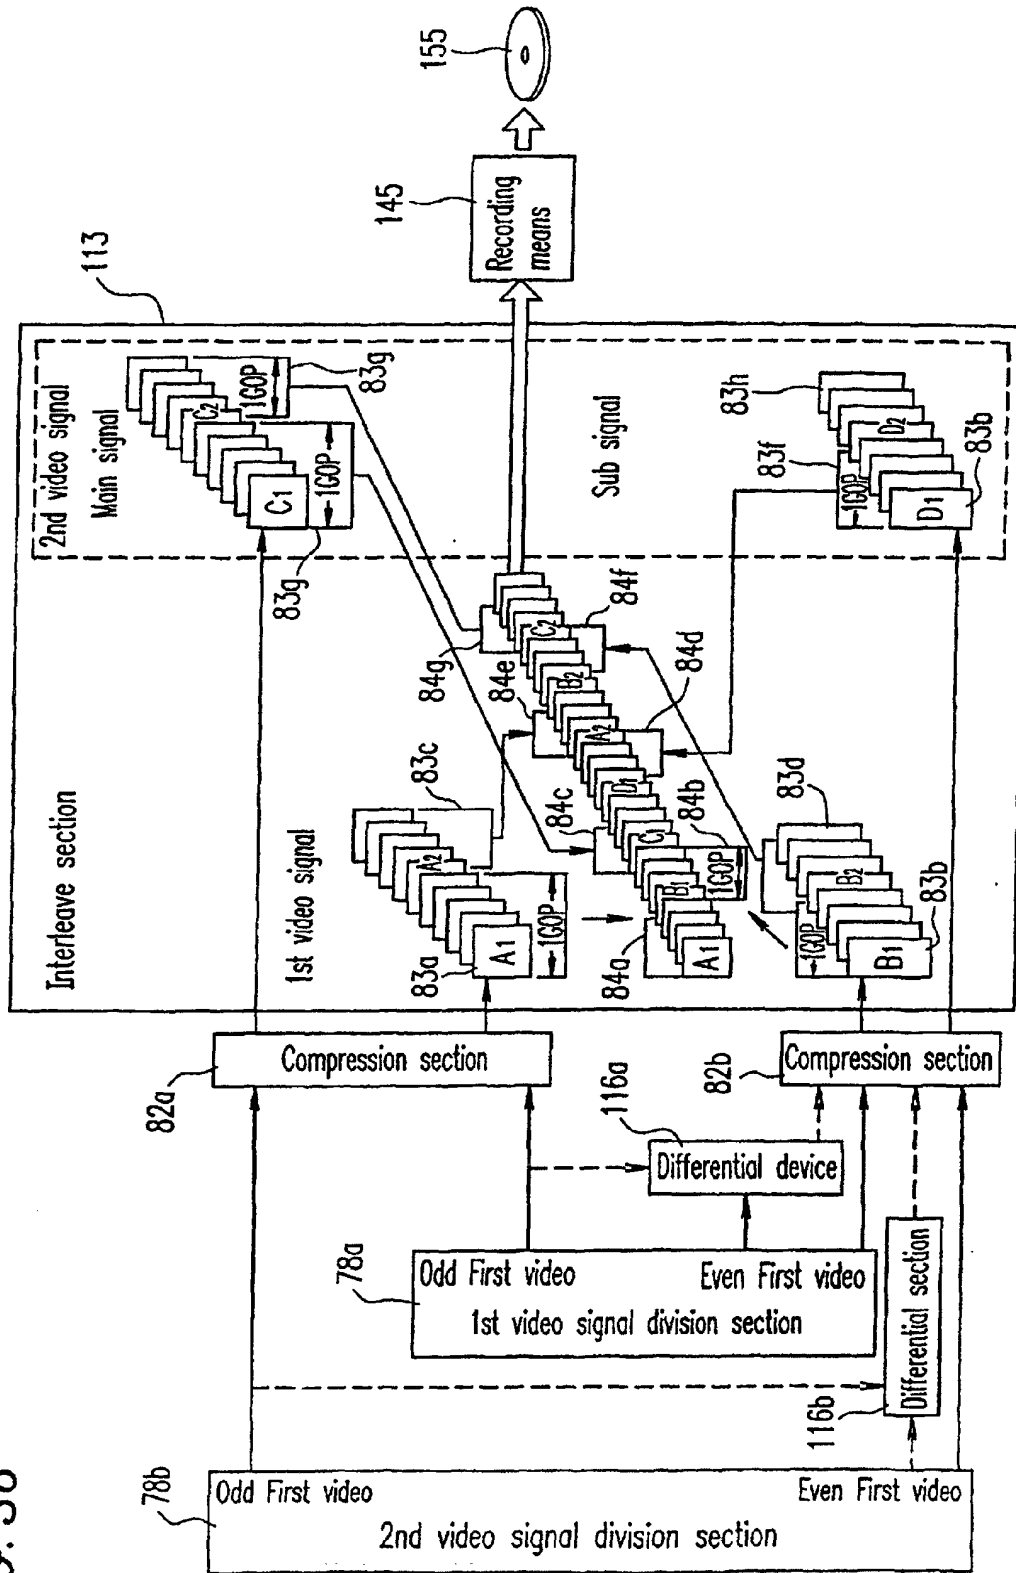


FIG. 37

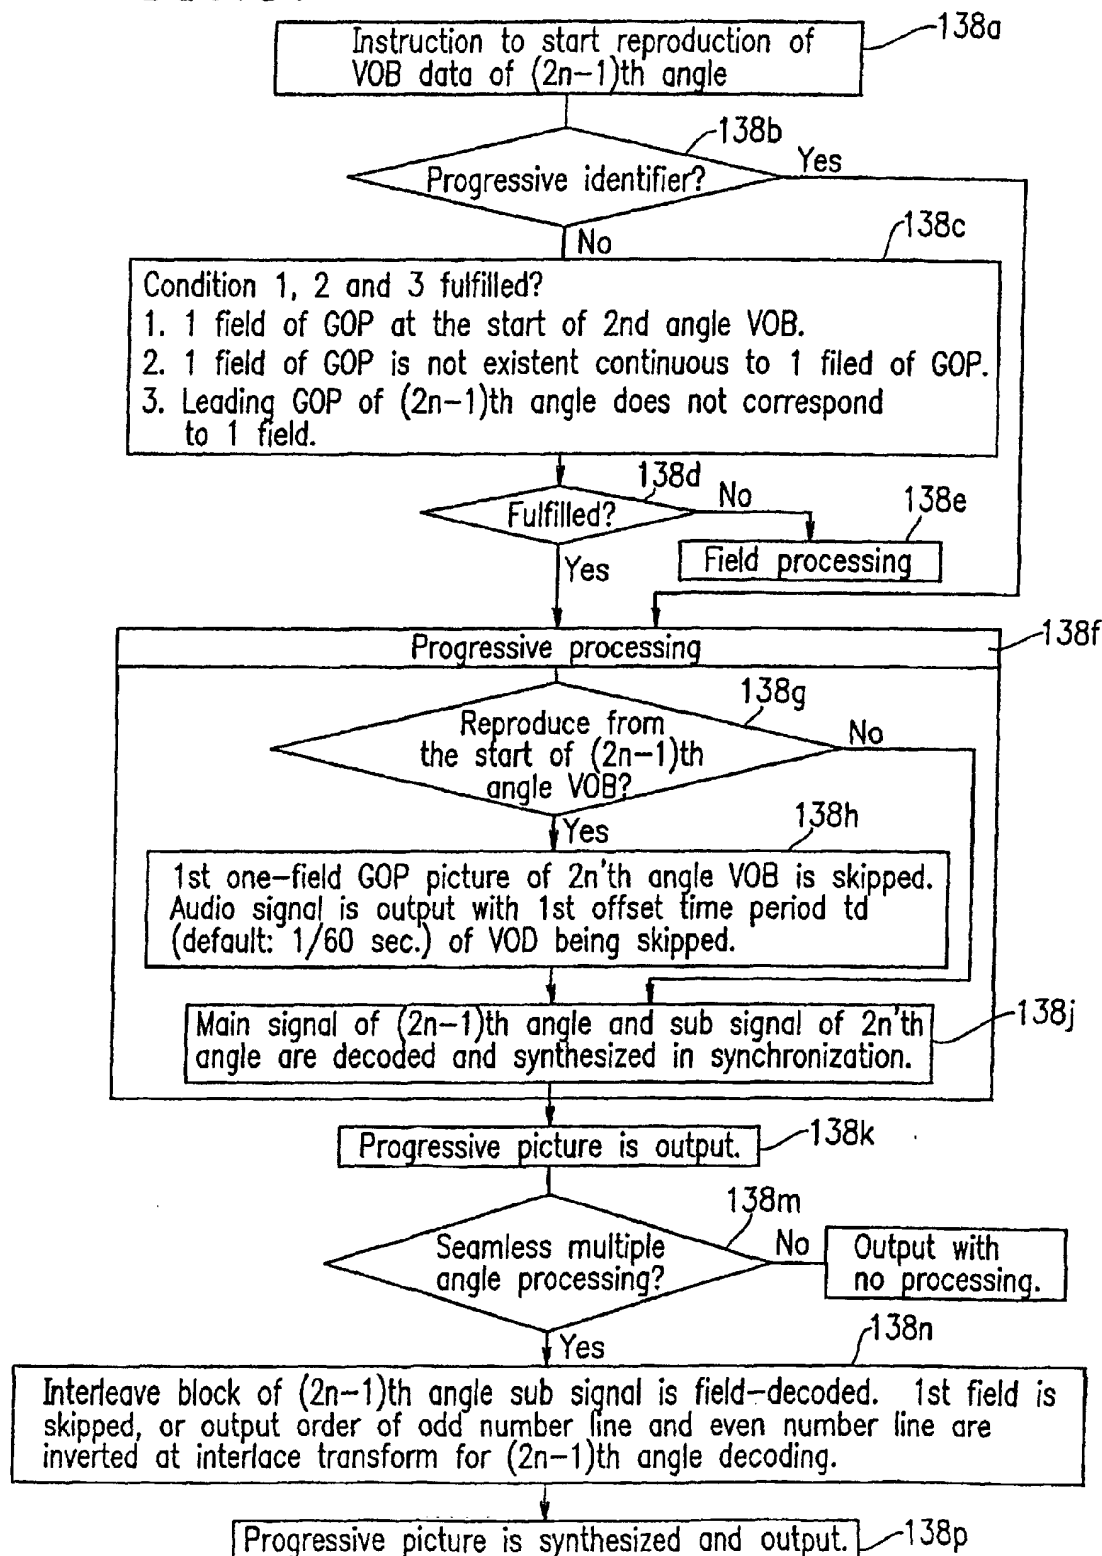



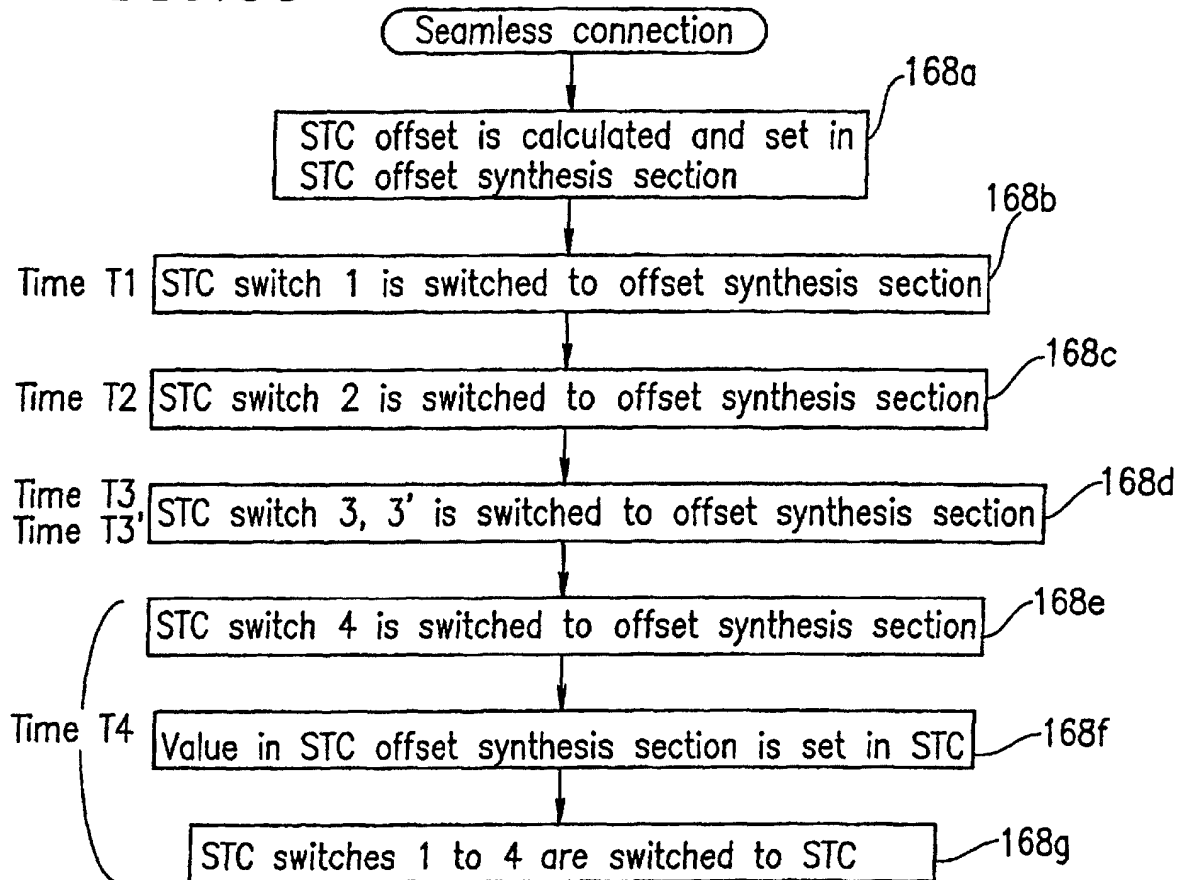
**FIG. 38**

FIG. 39

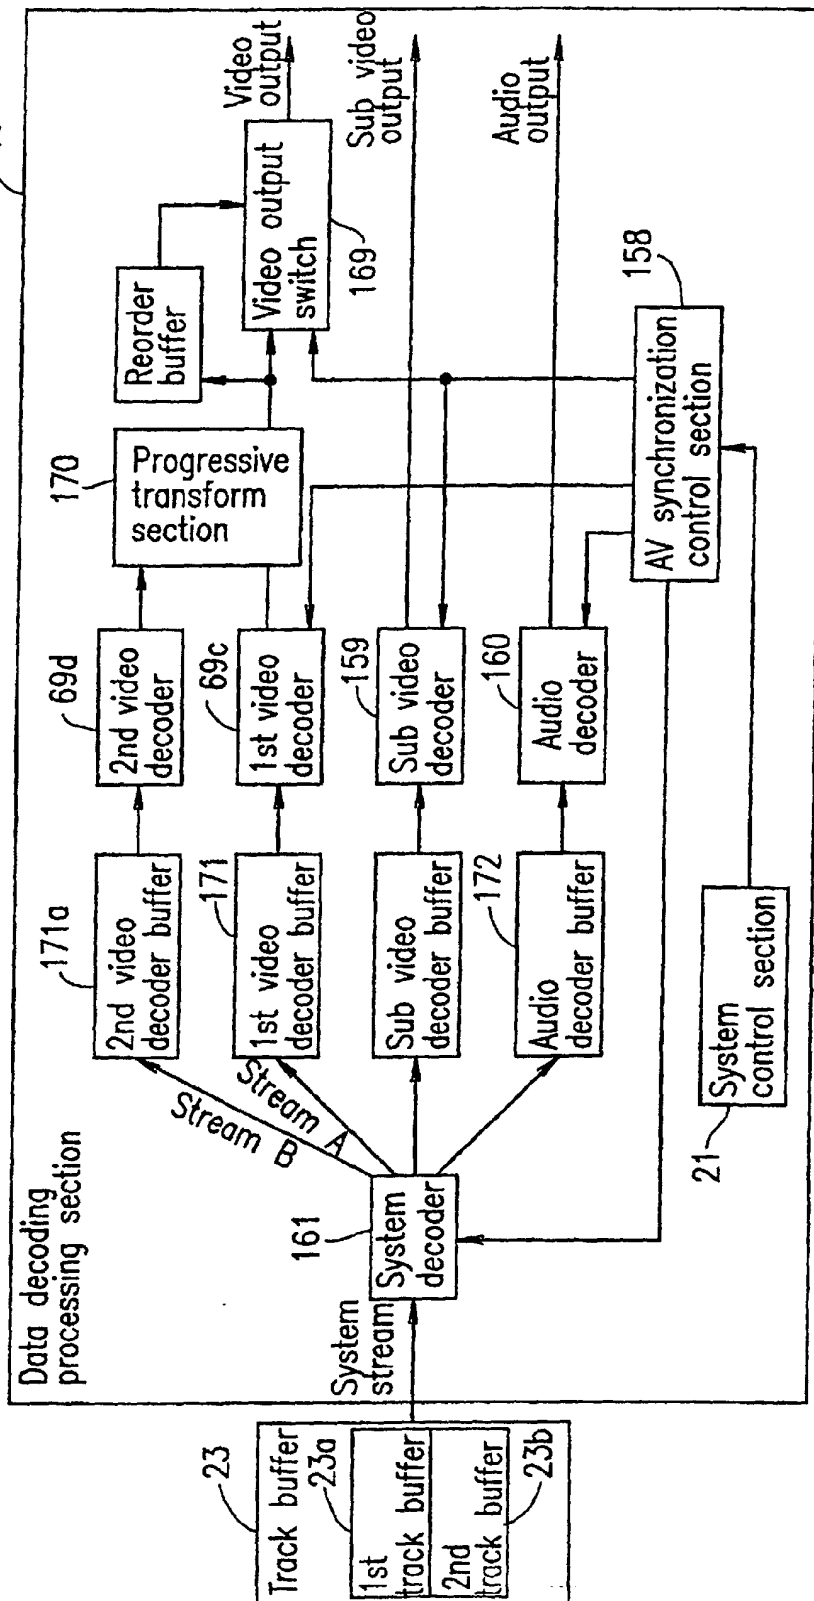

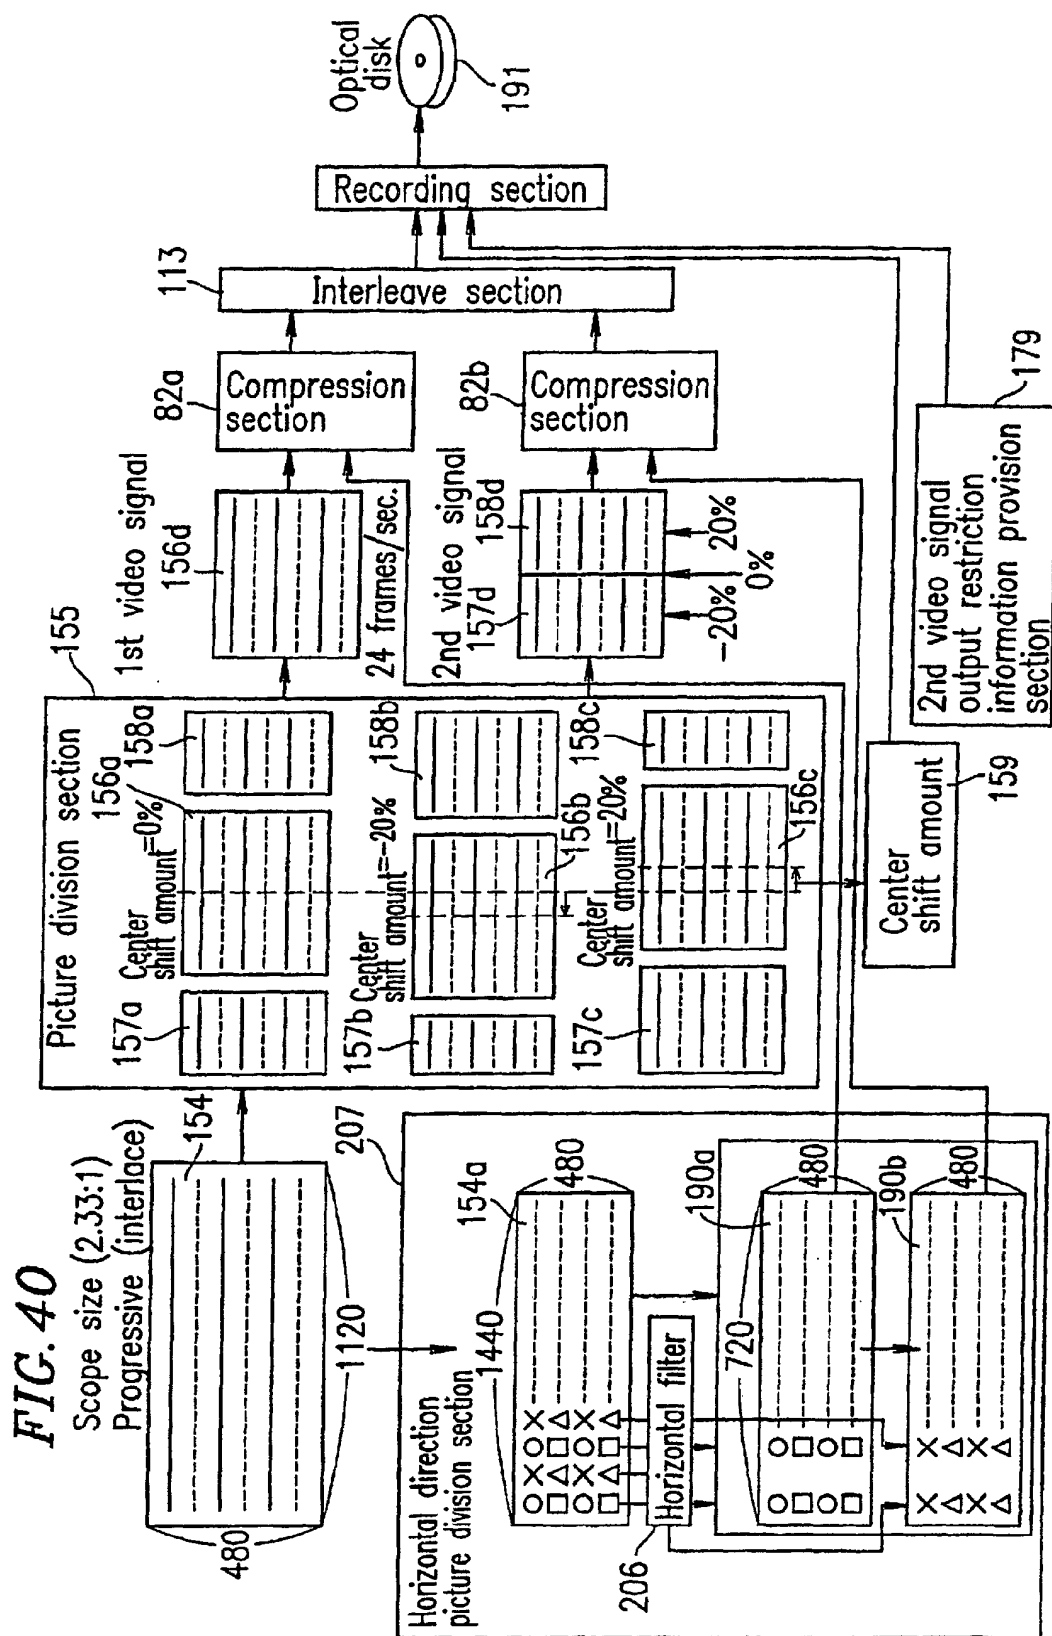

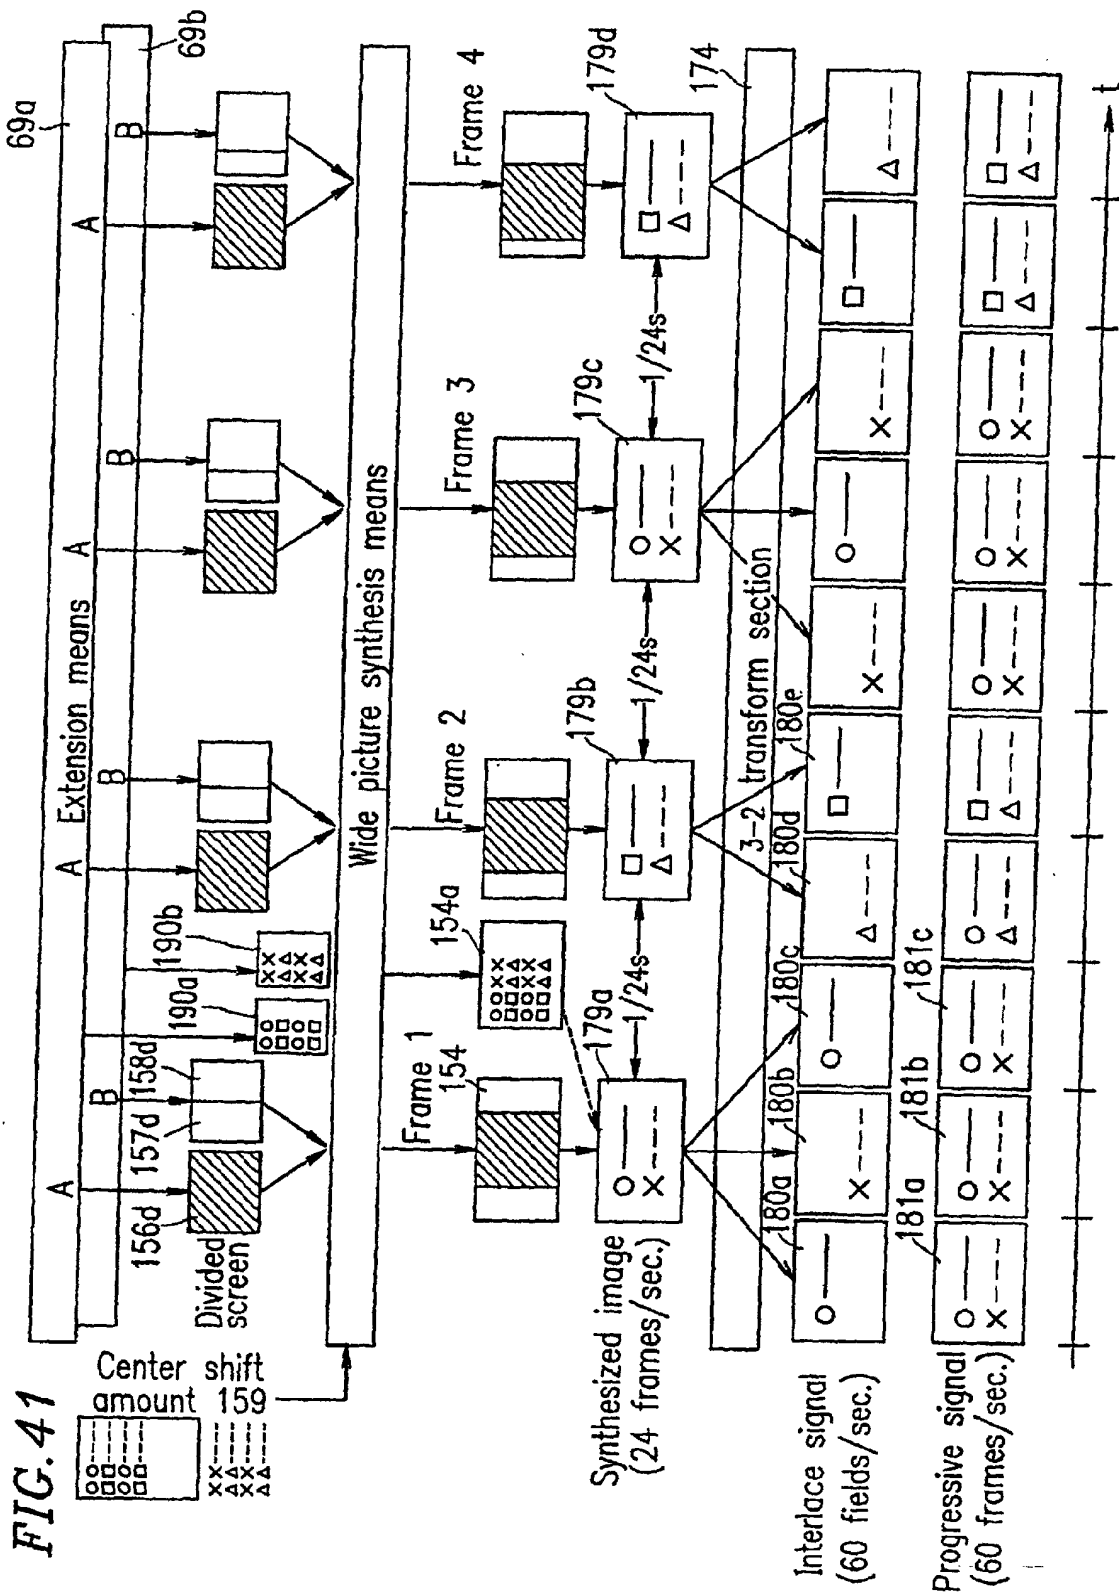


FIG. 42

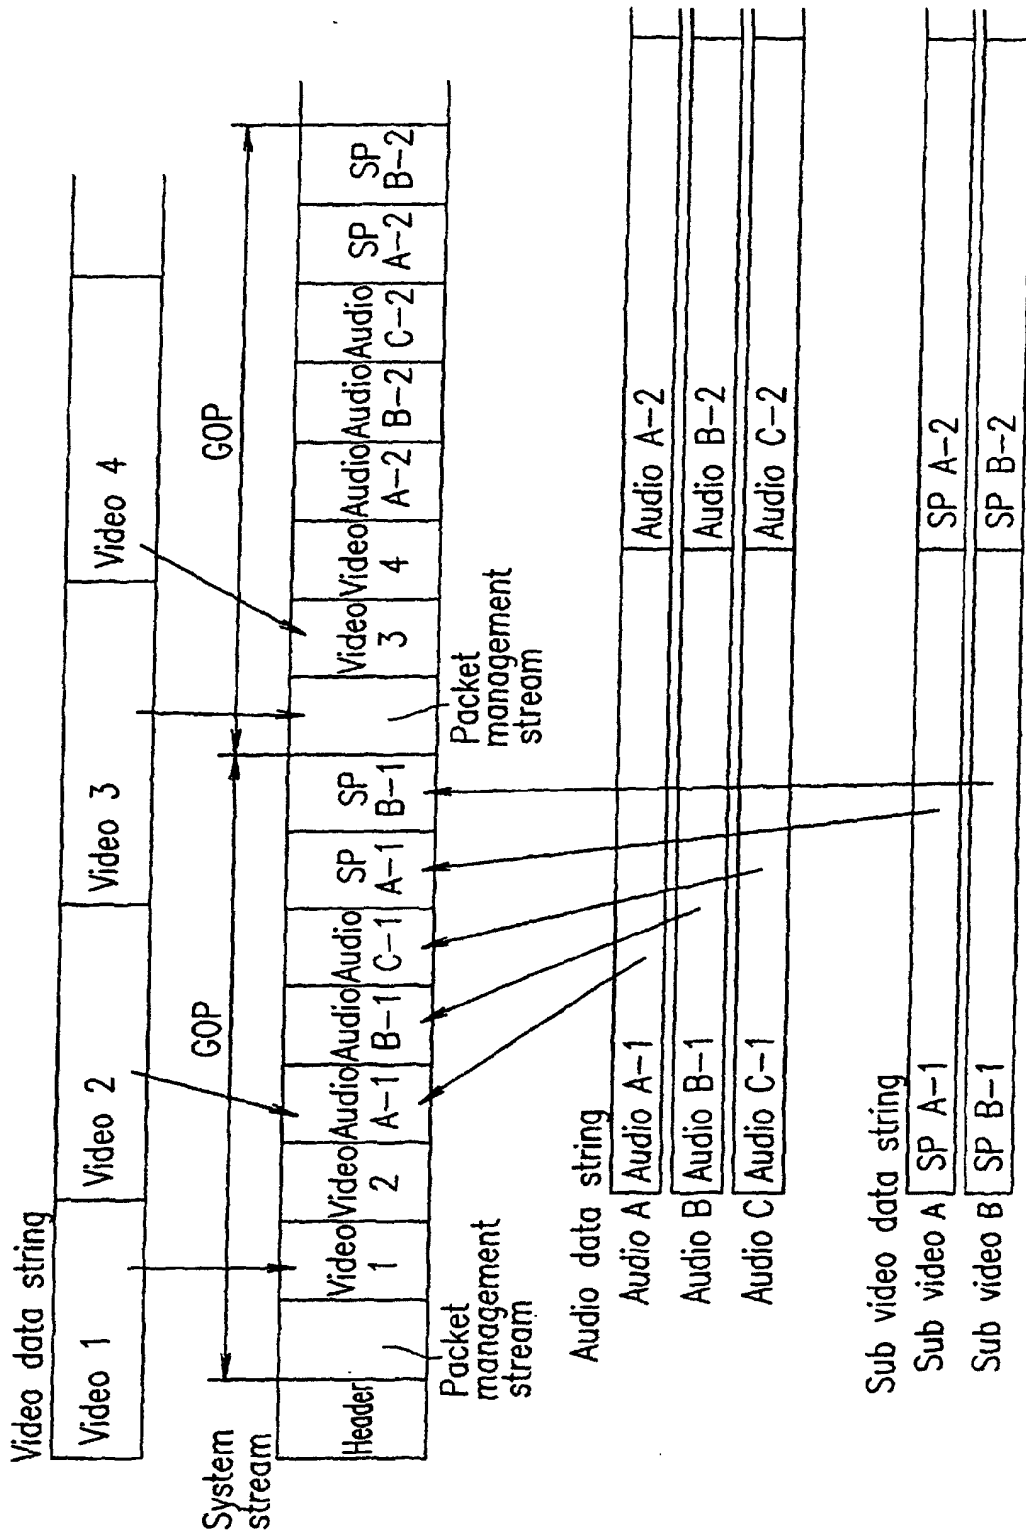
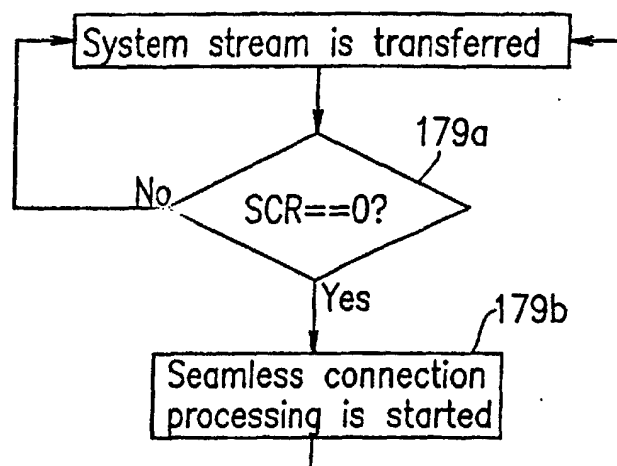


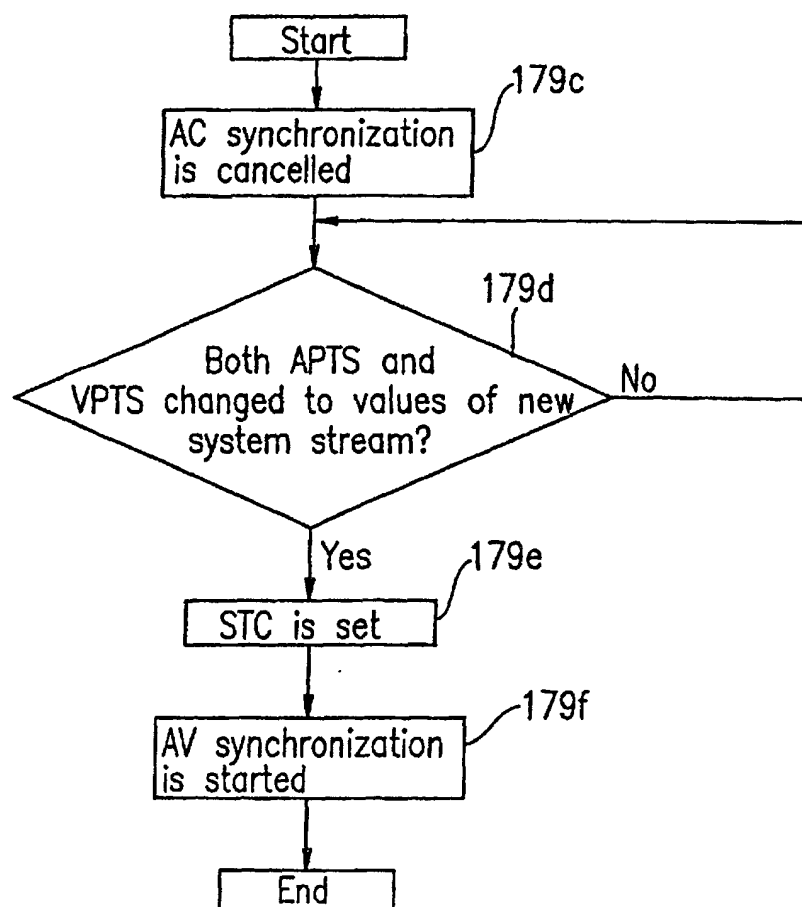



FIG. 43

(a)



(b)



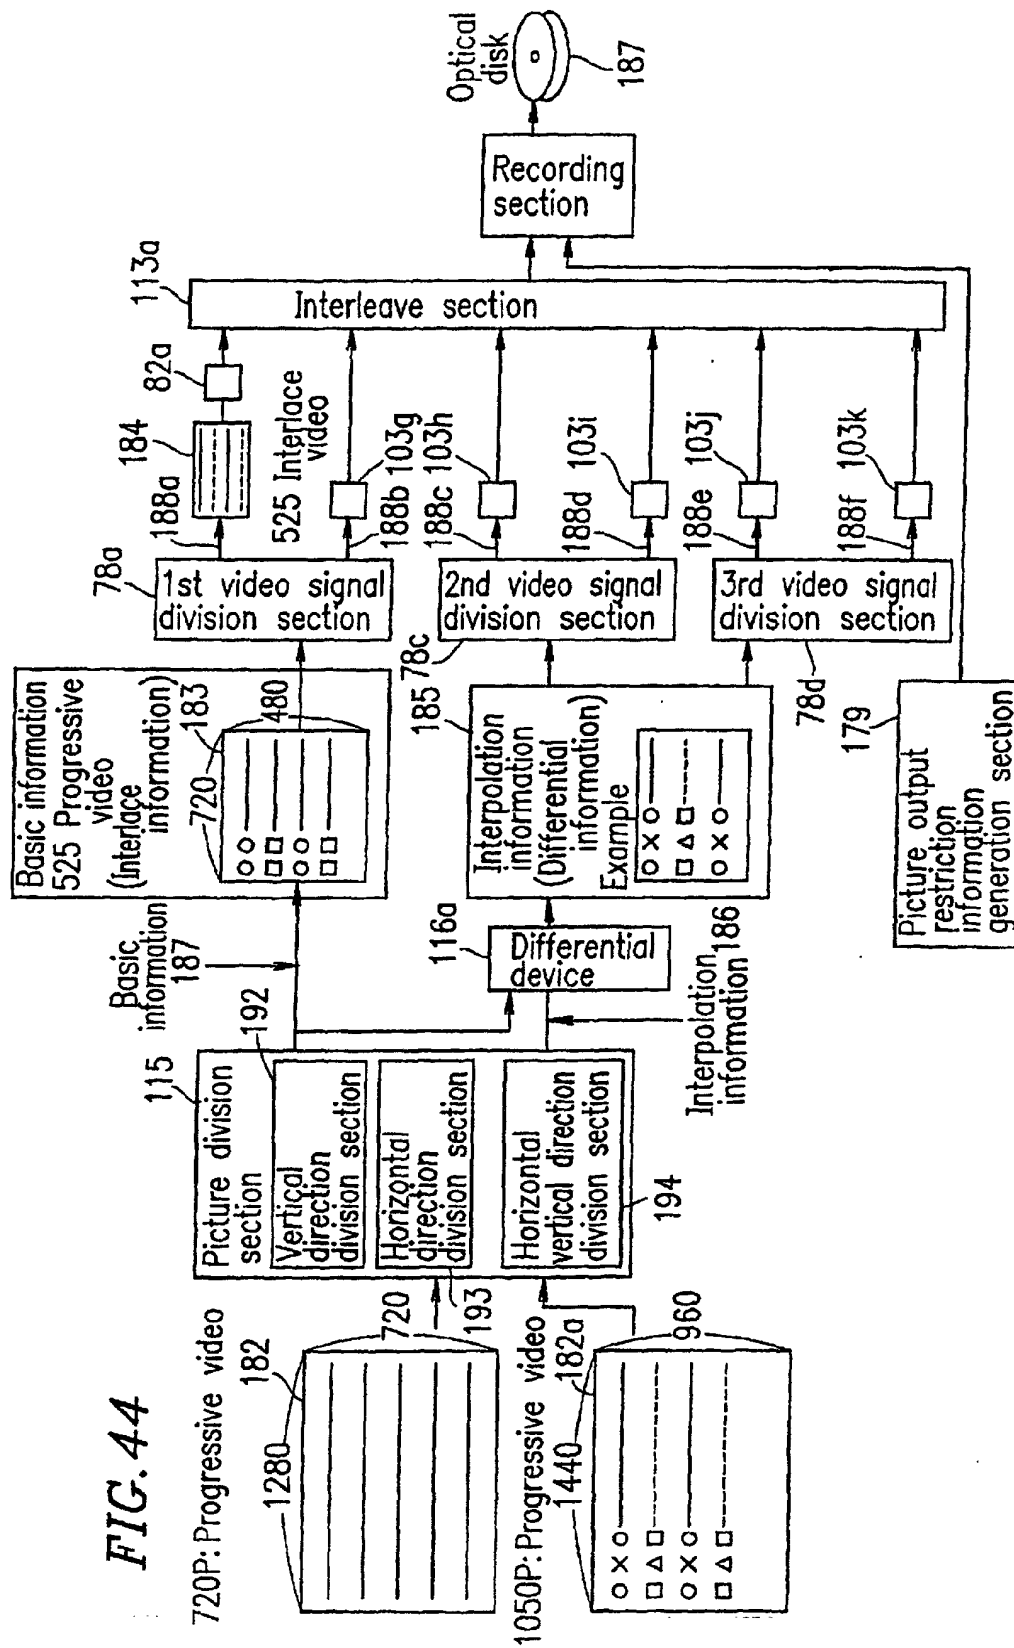

**FIG. 45** (1) Interleave block


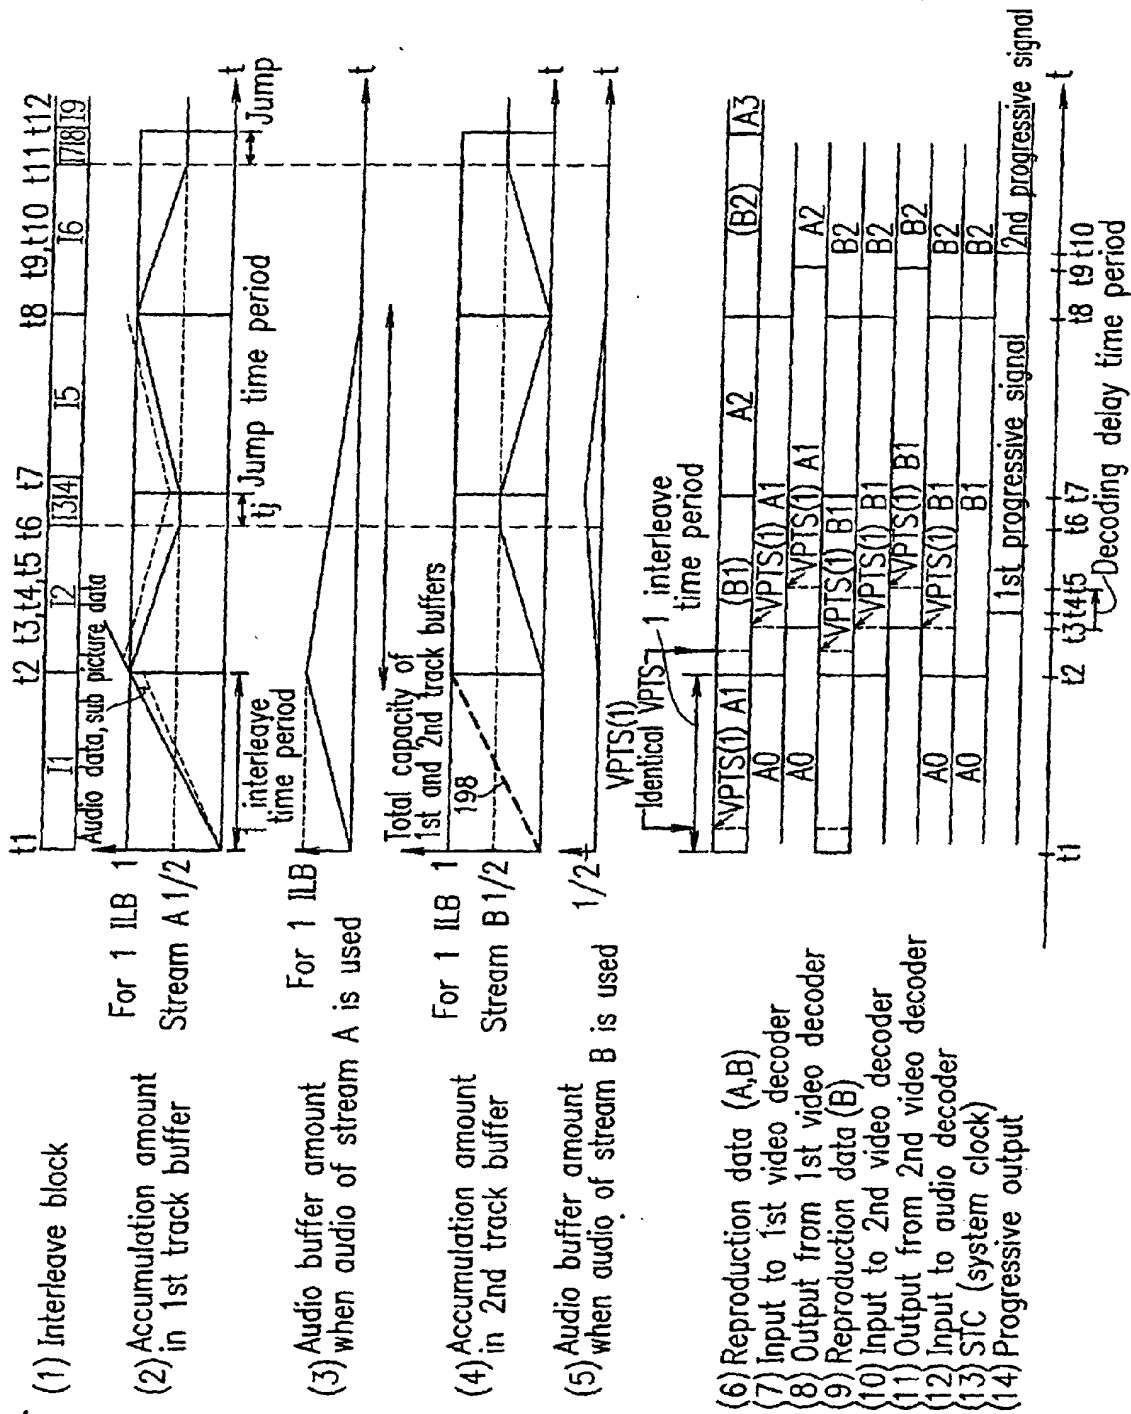


FIG. 46

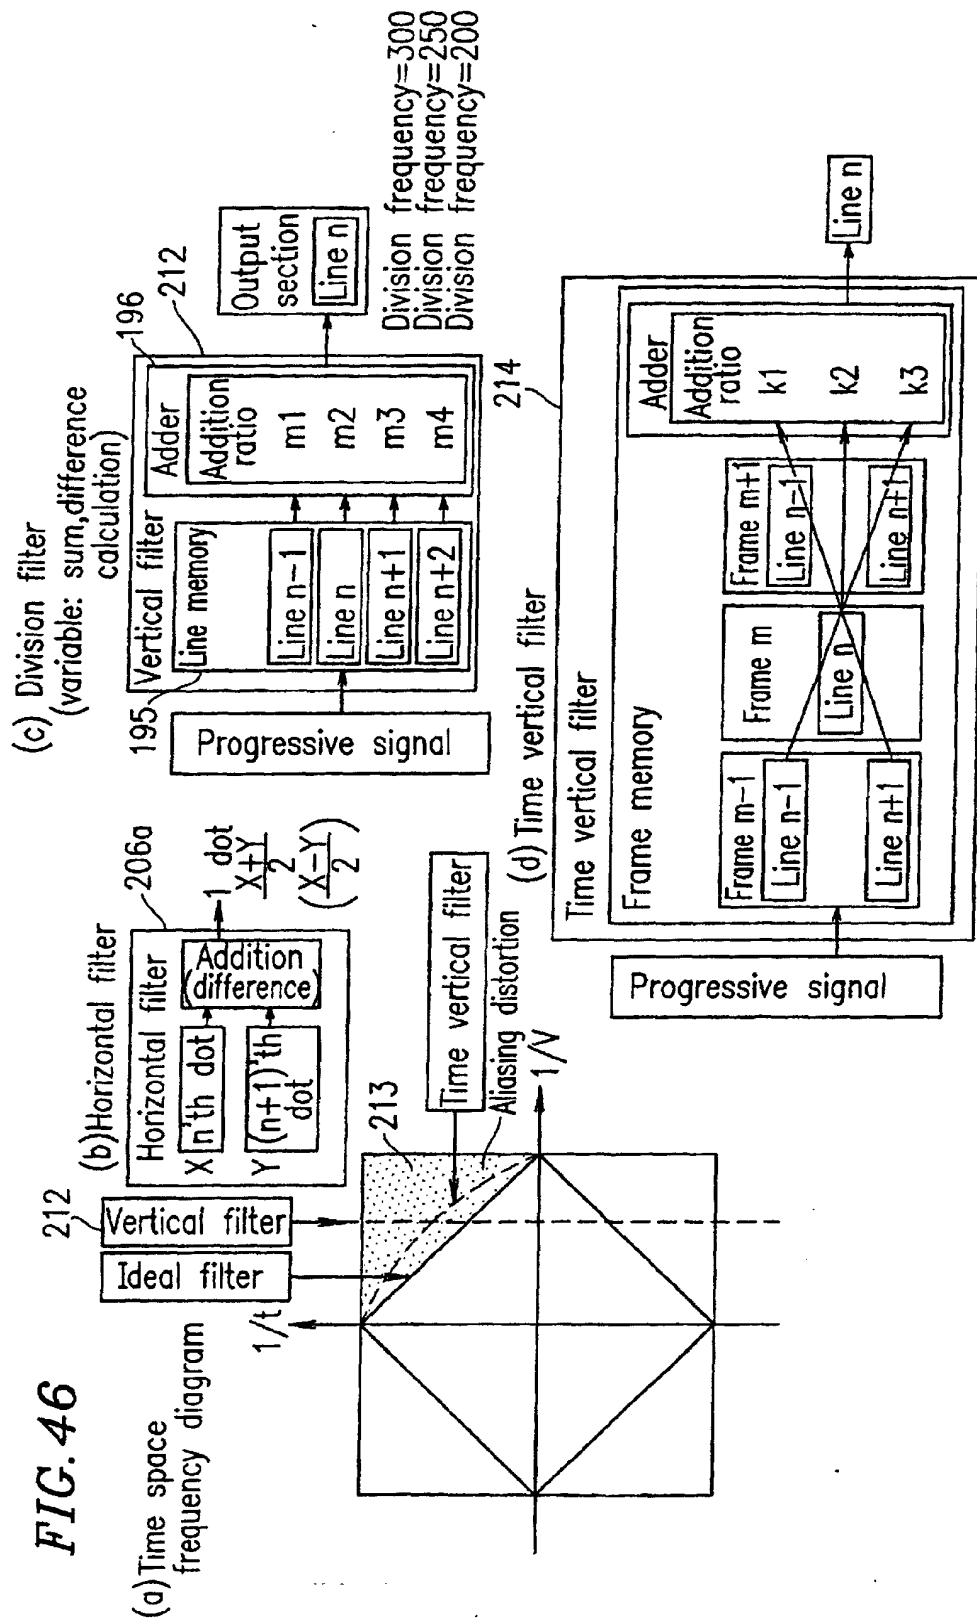

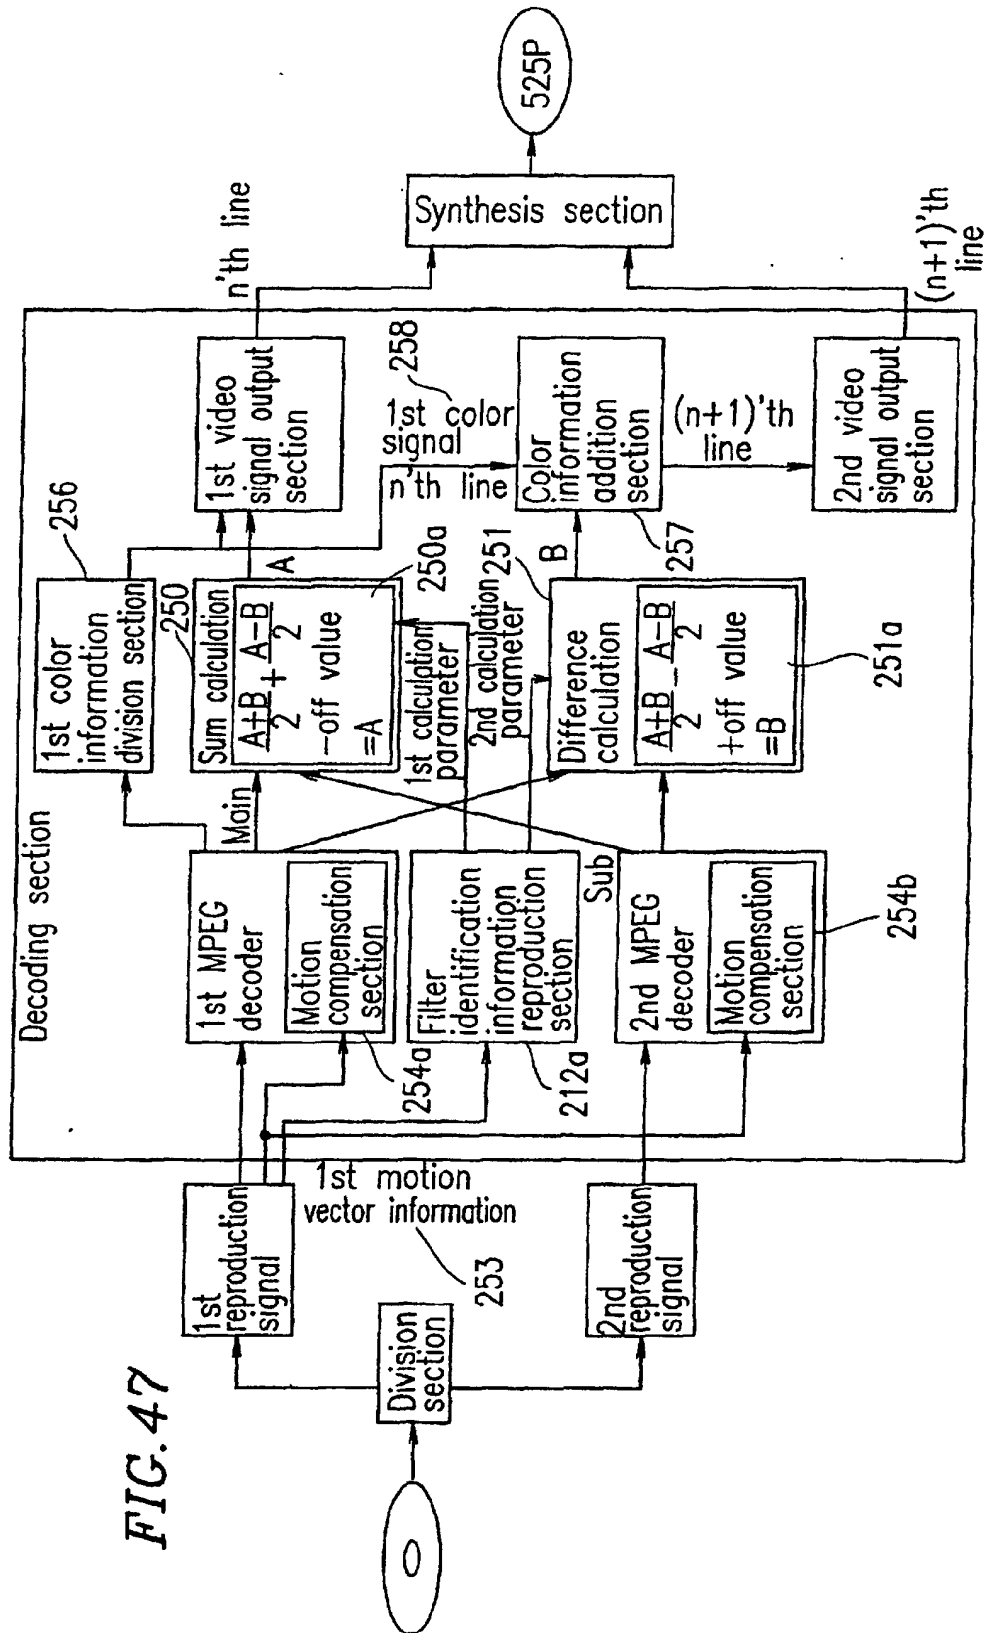


FIG. 48




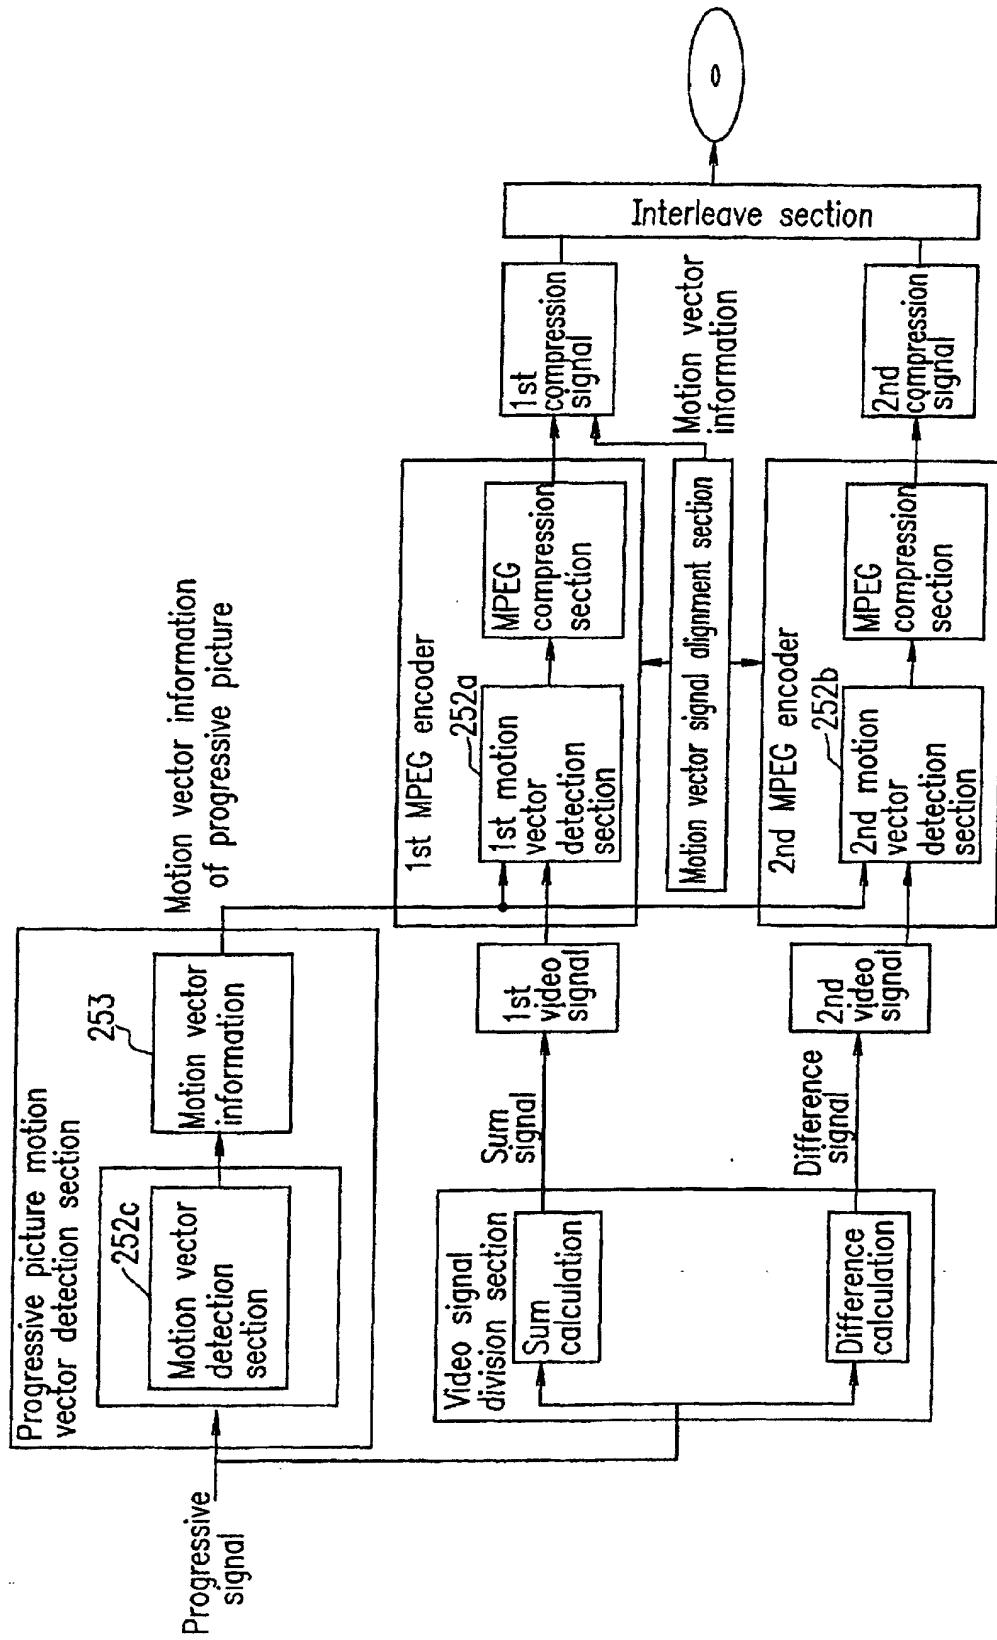



FIG. 49

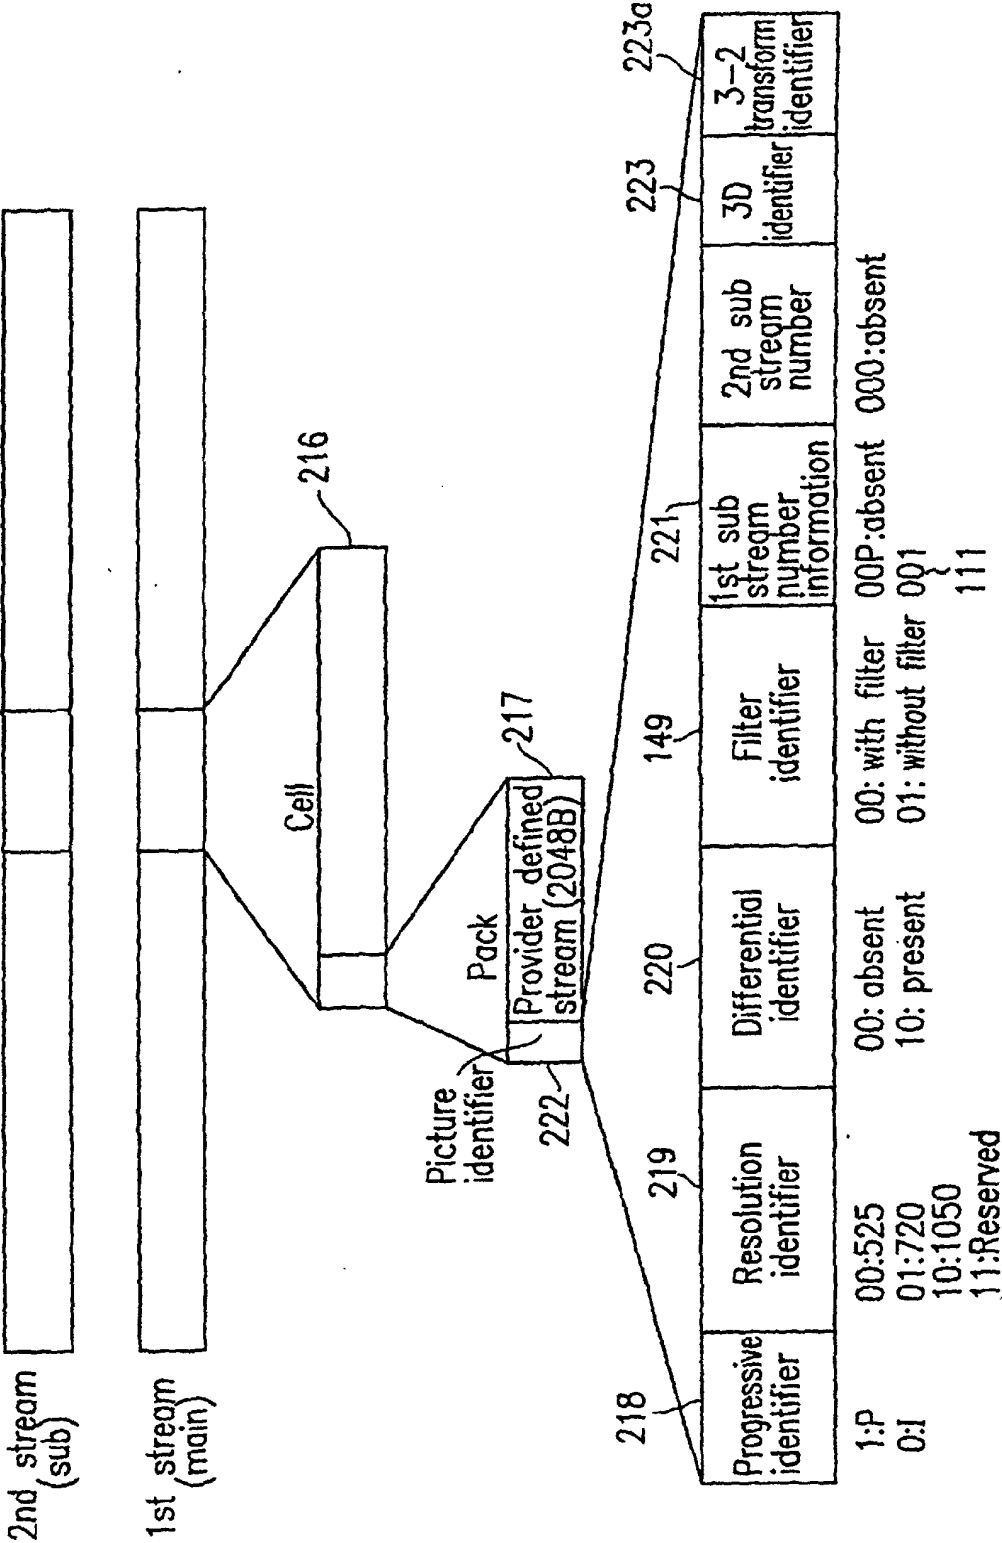


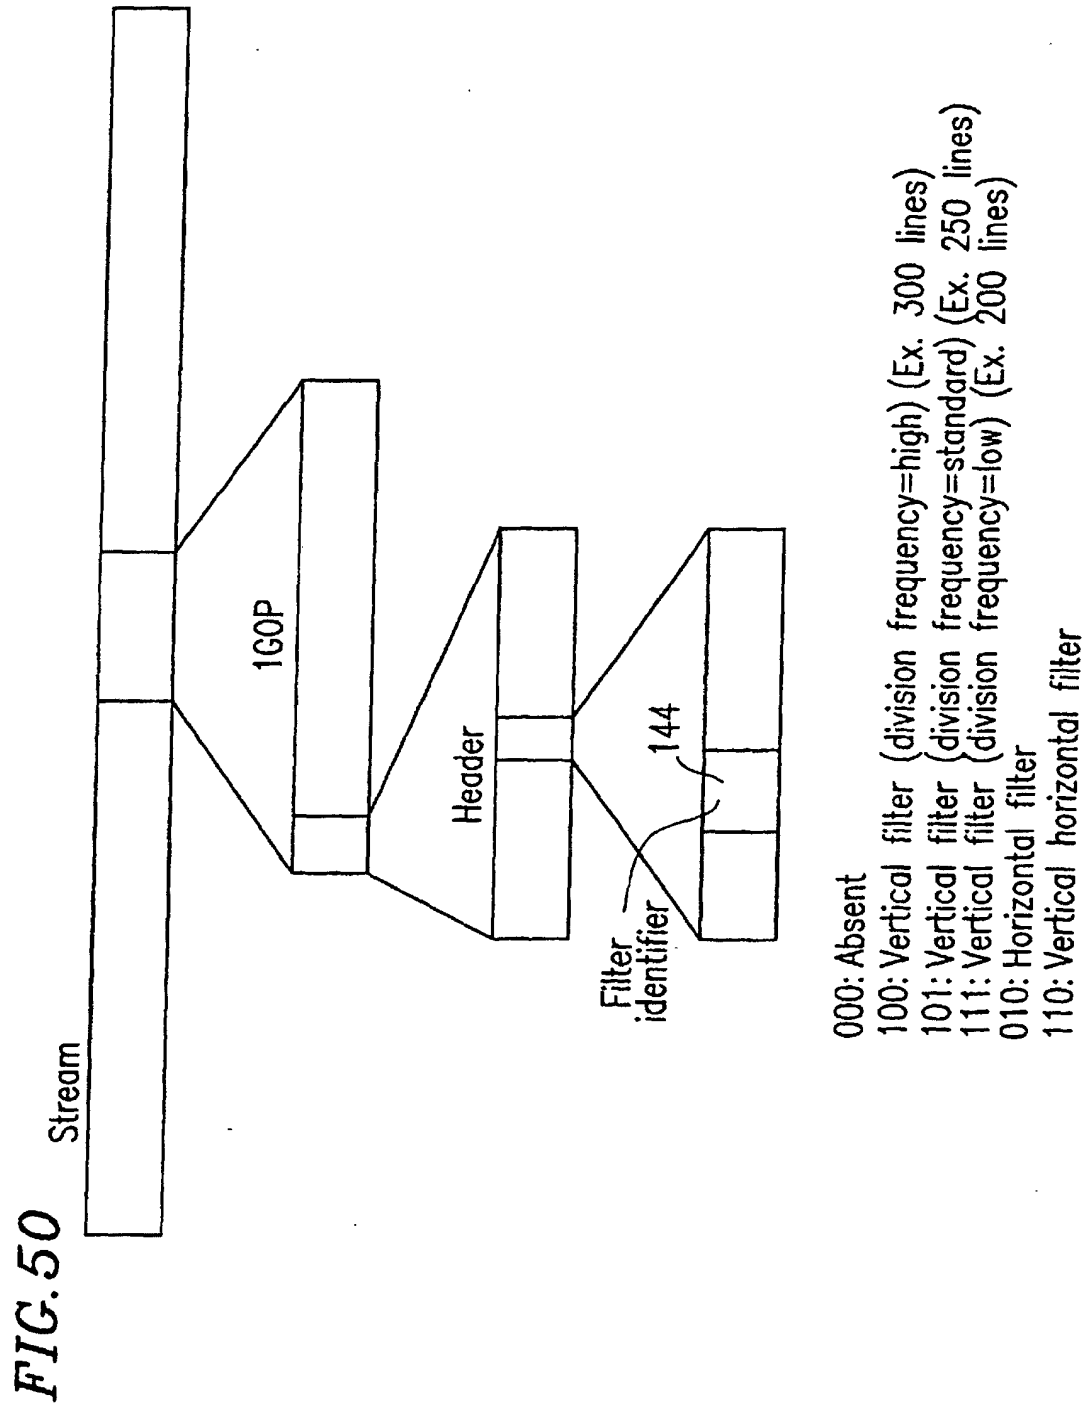

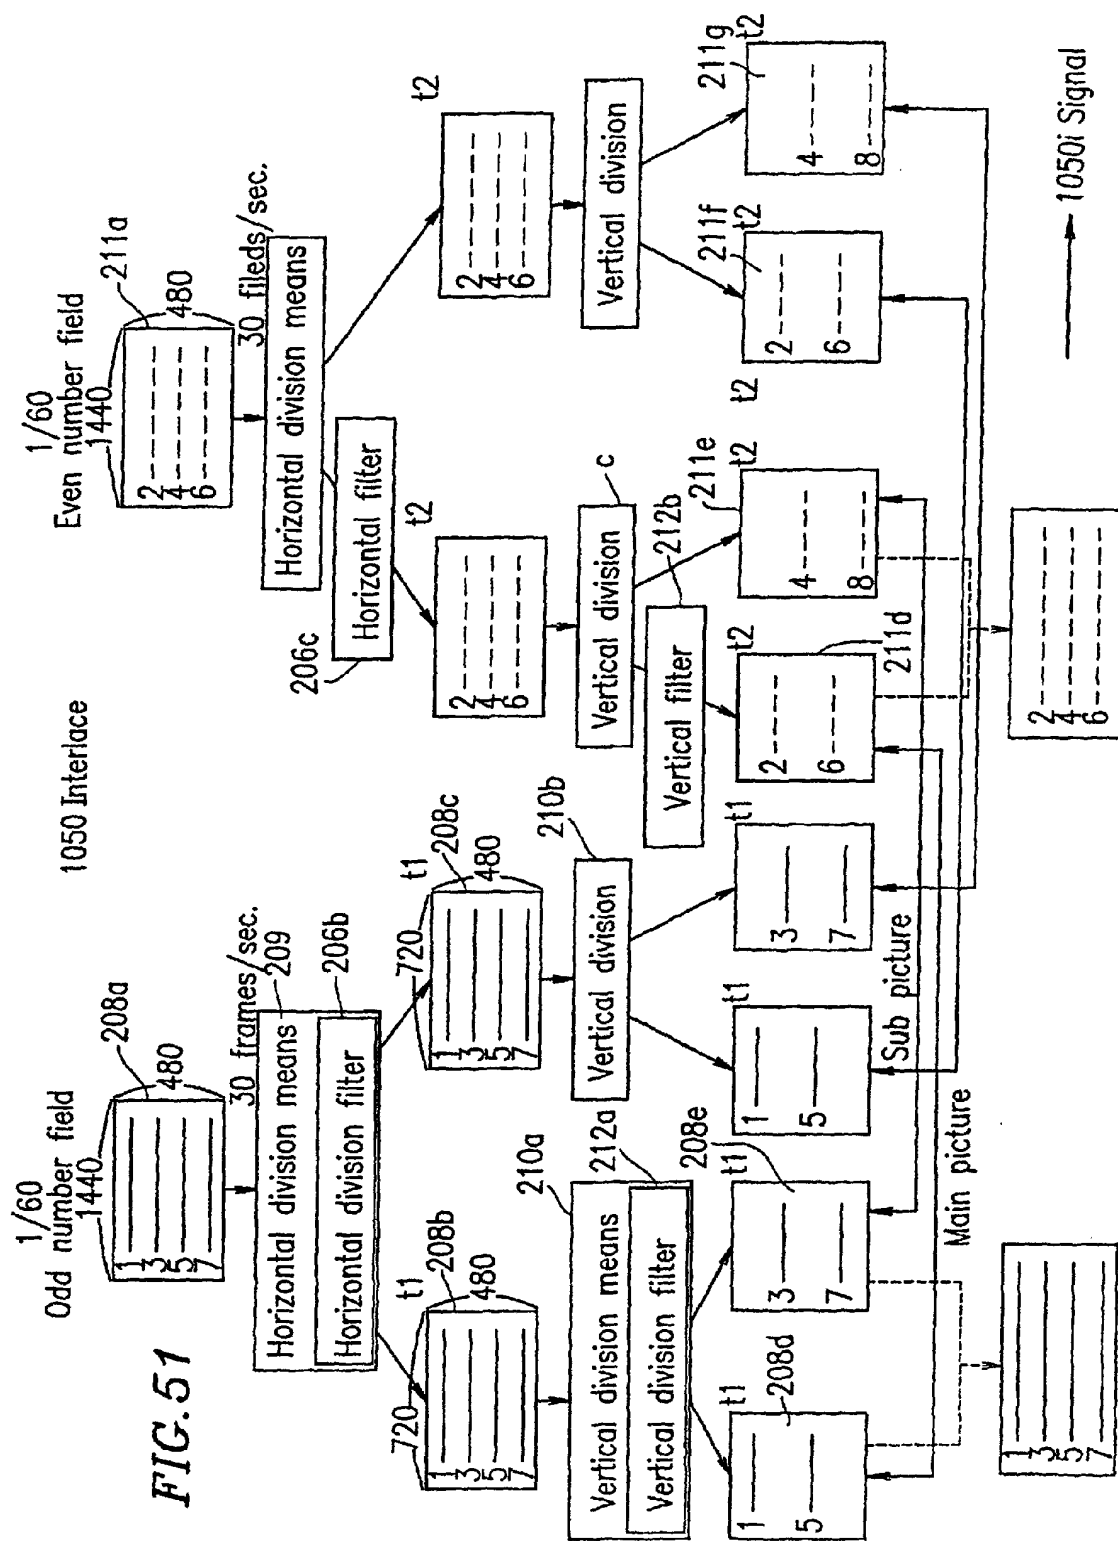



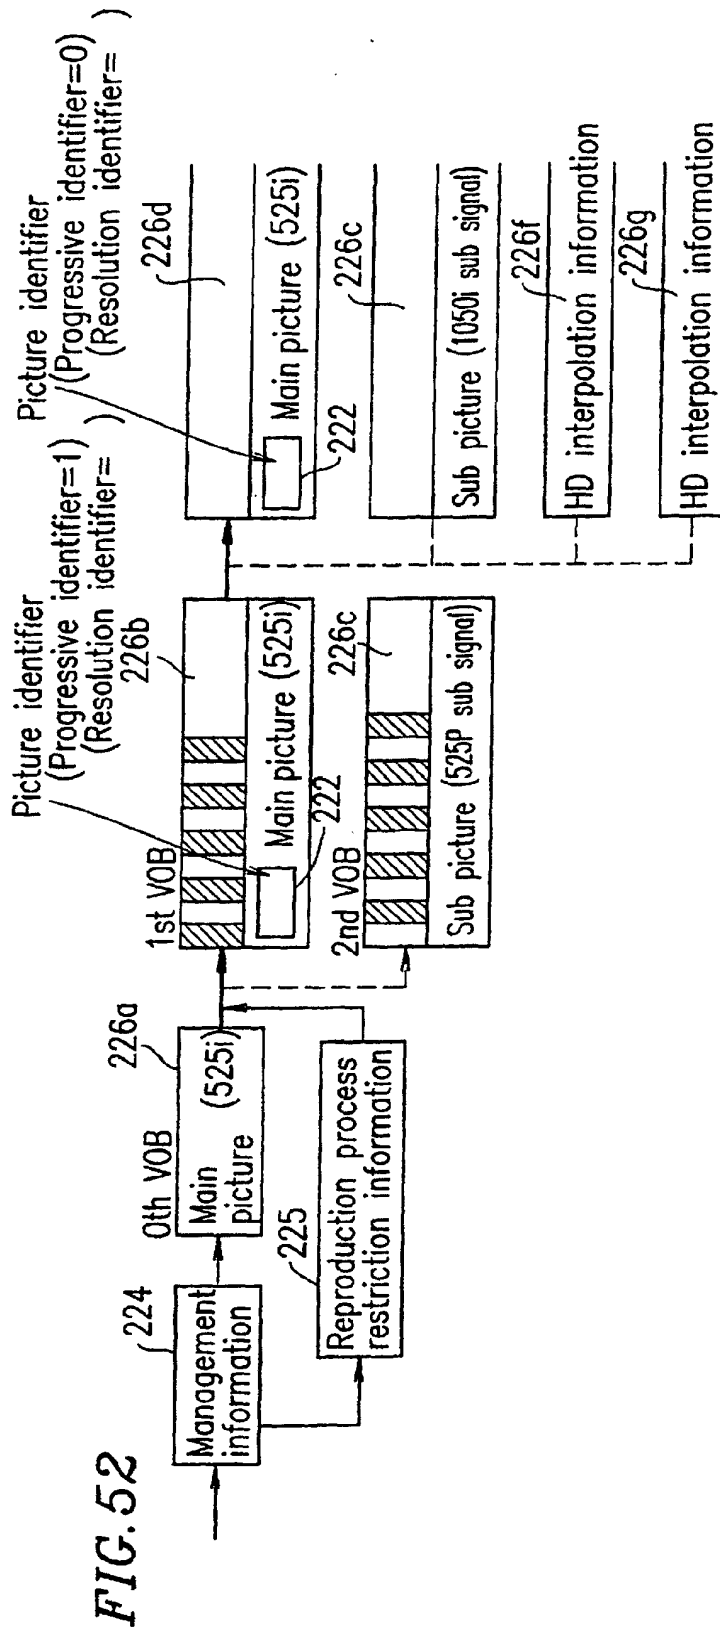

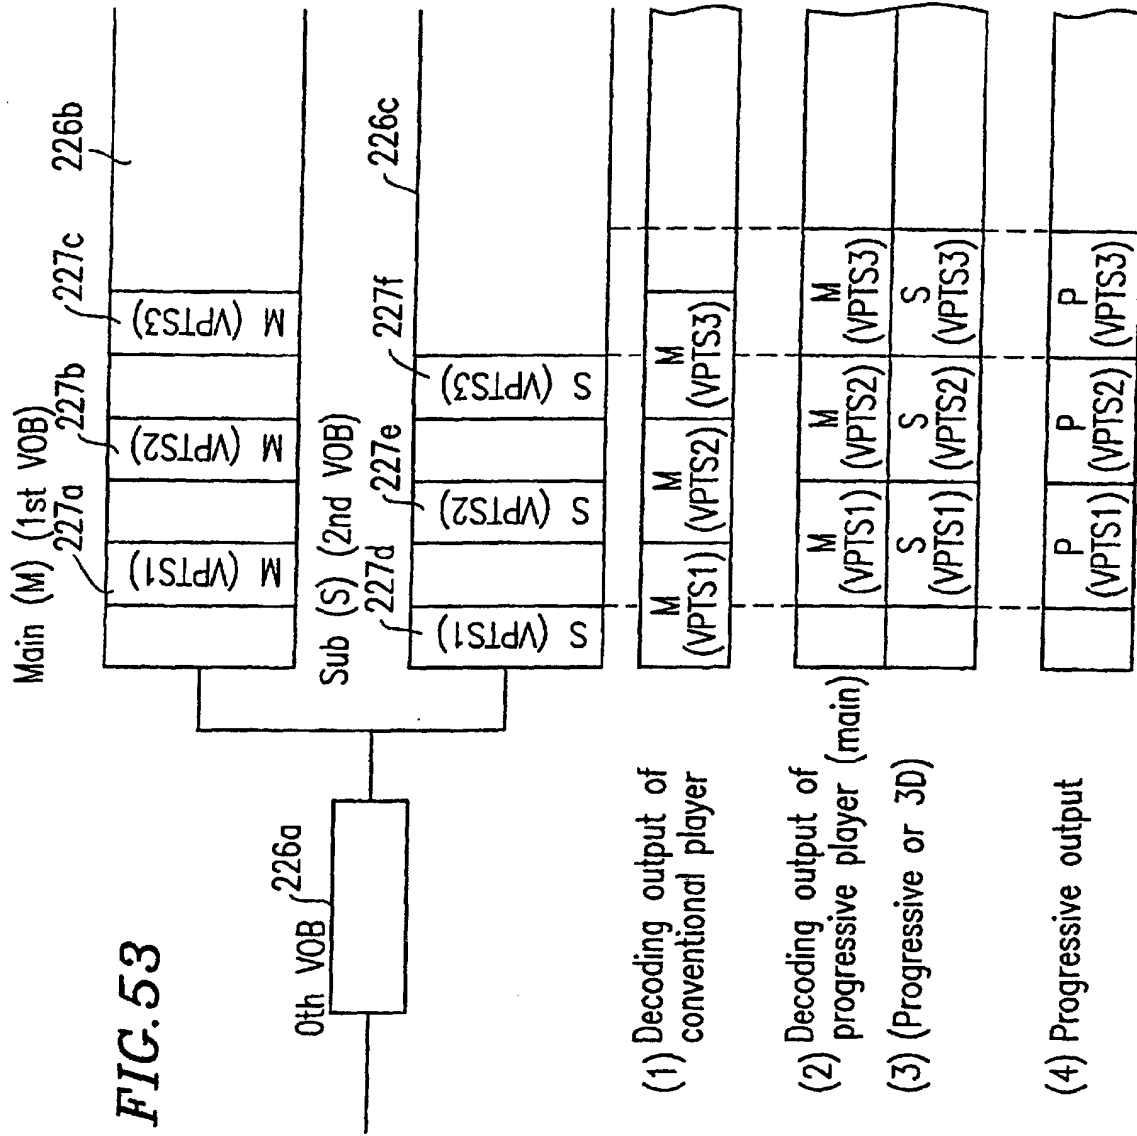

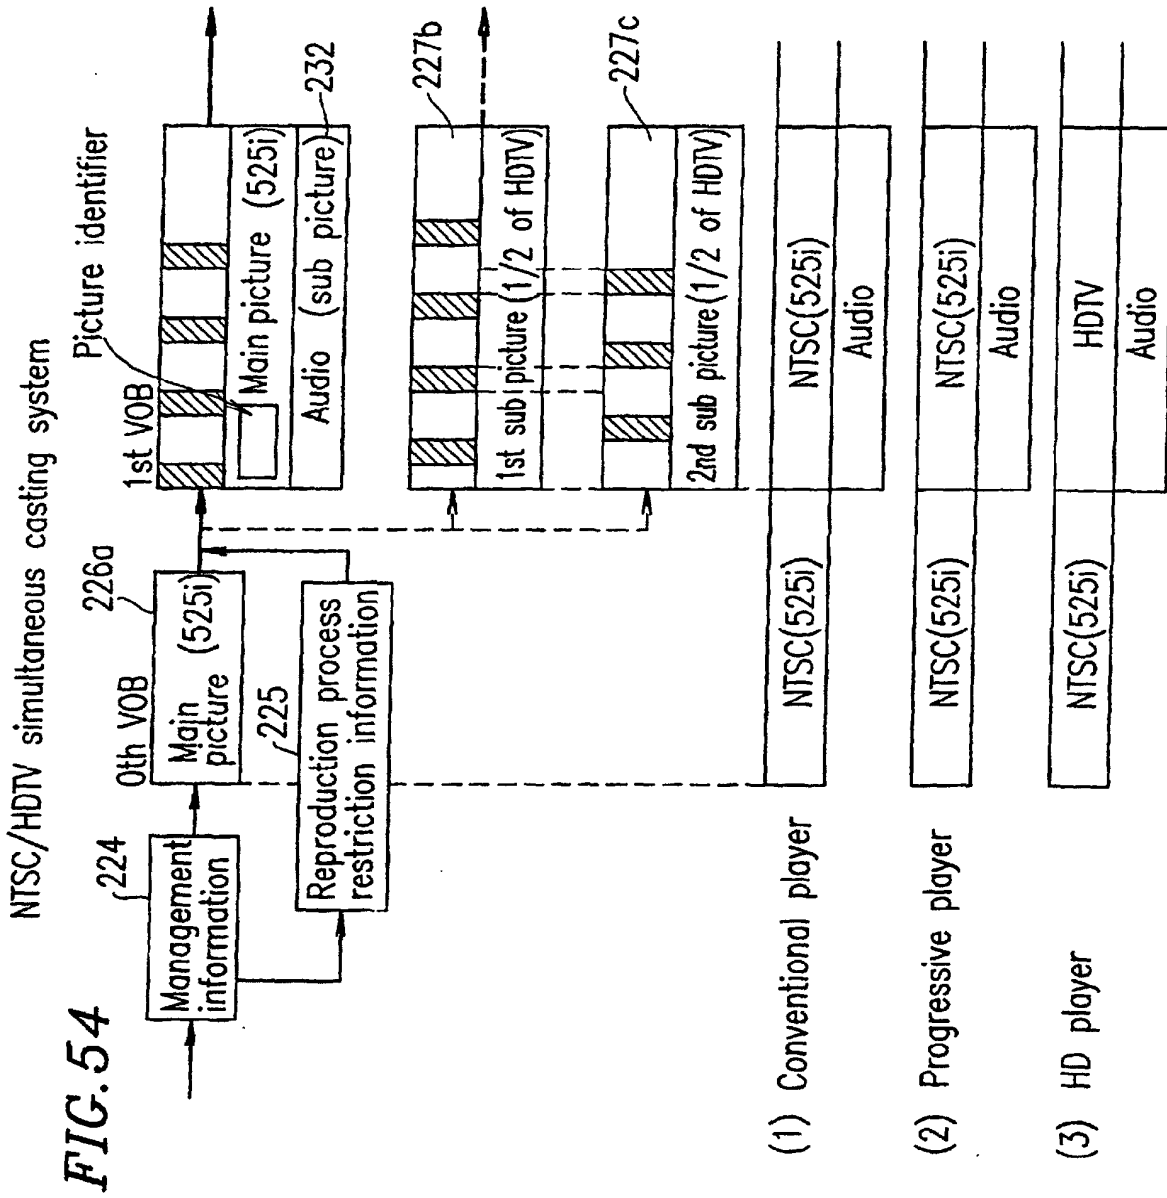


FIG. 55


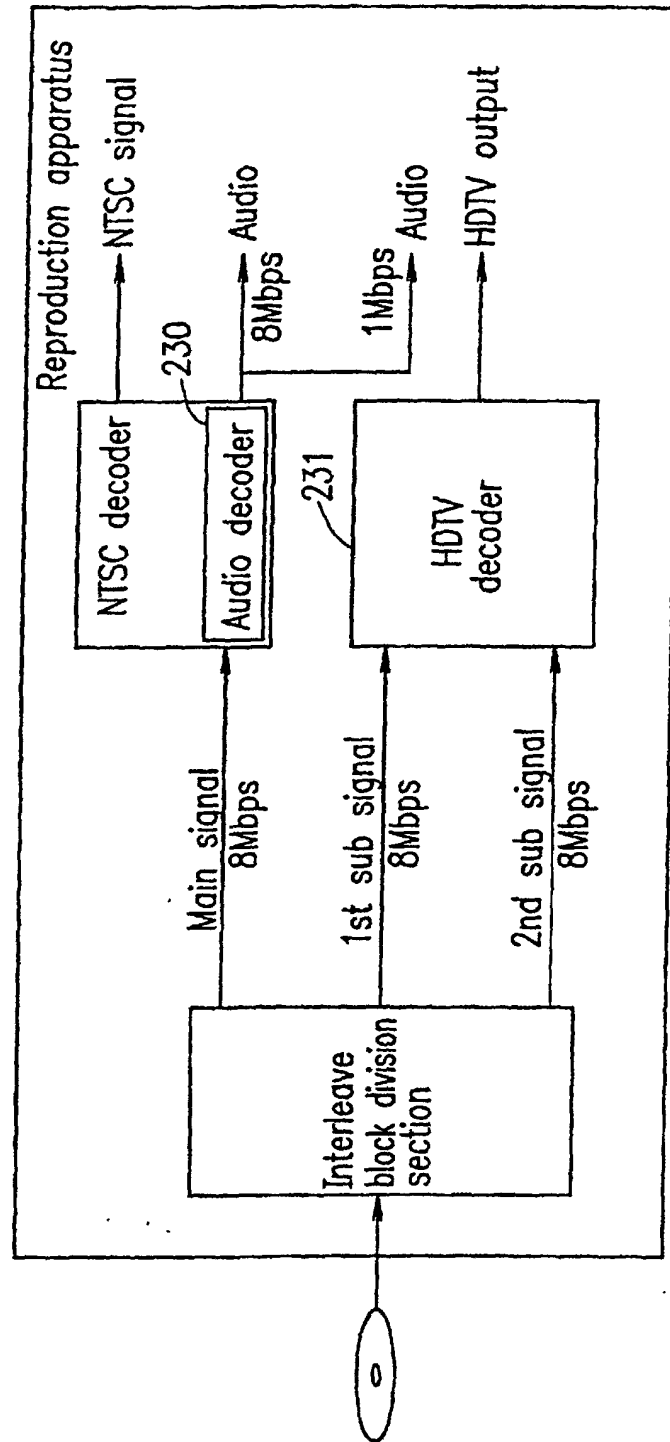


FIG. 56

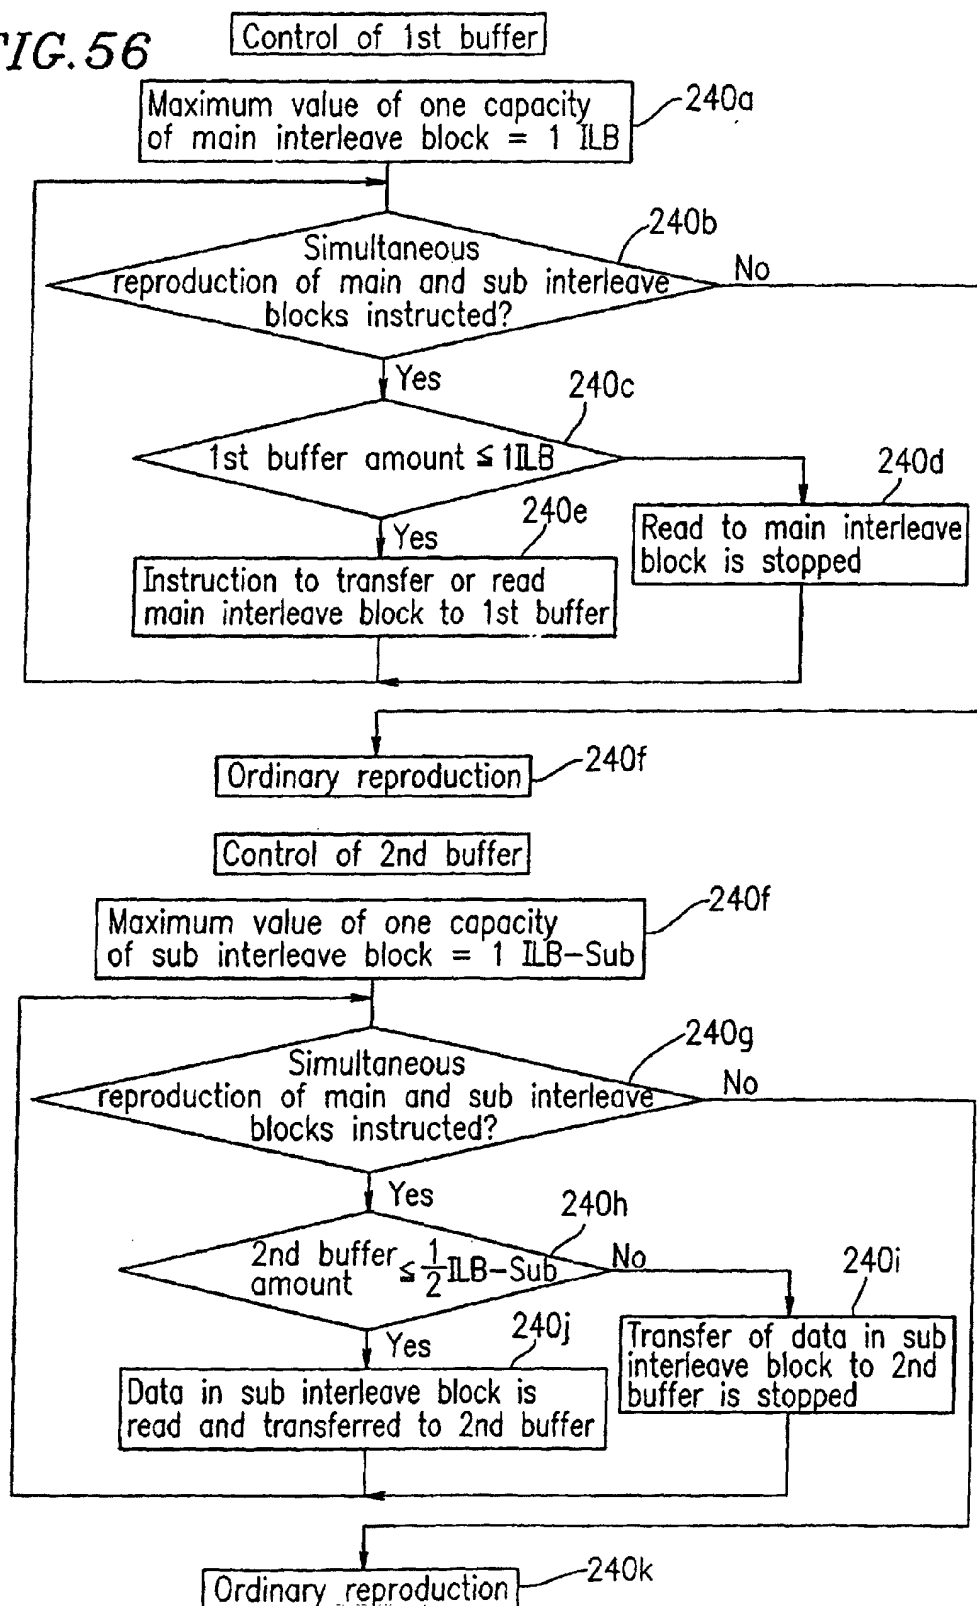



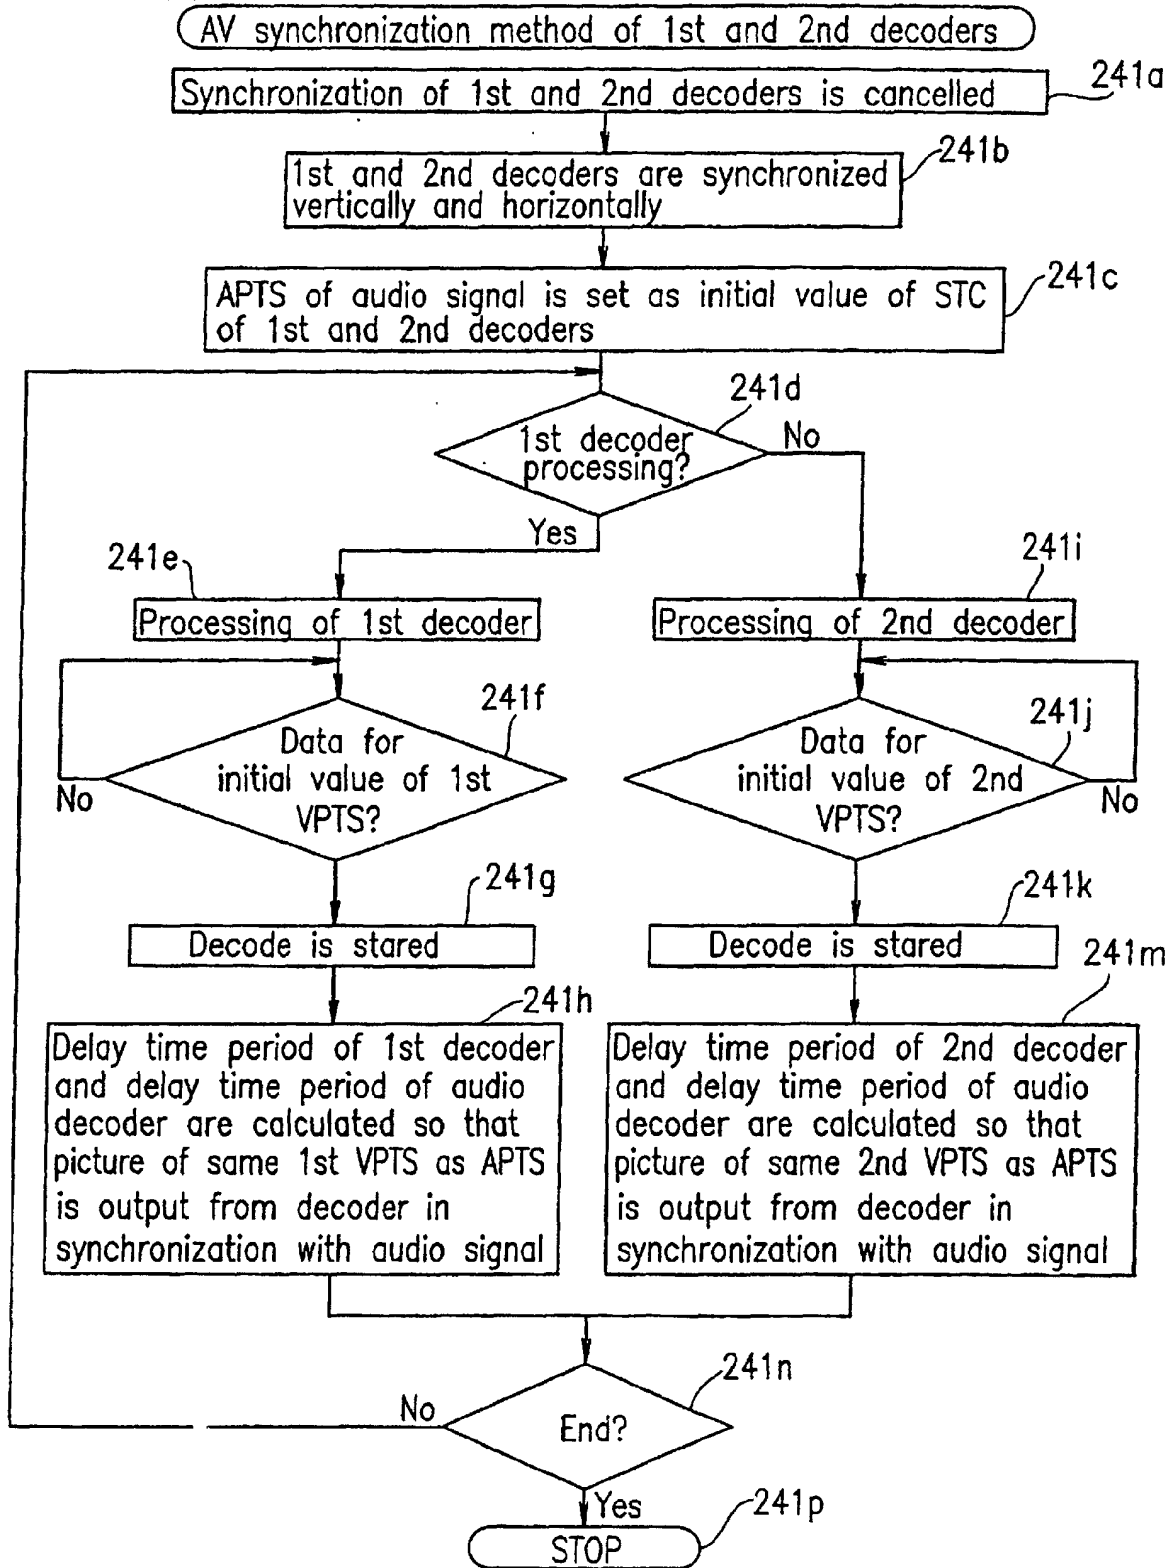
**FIG. 57**





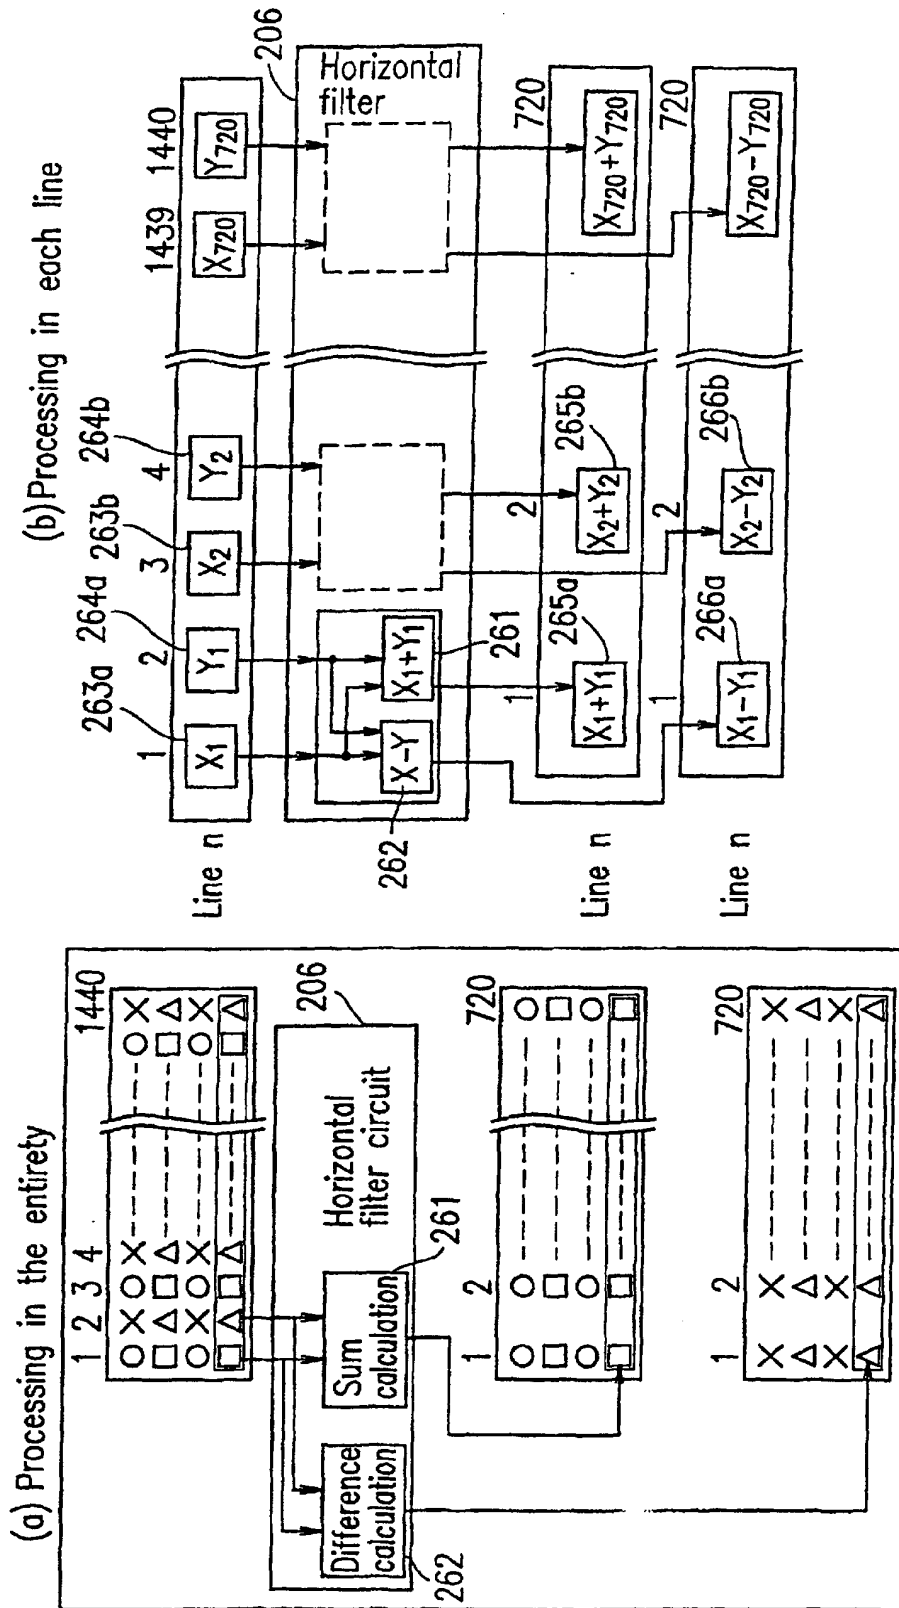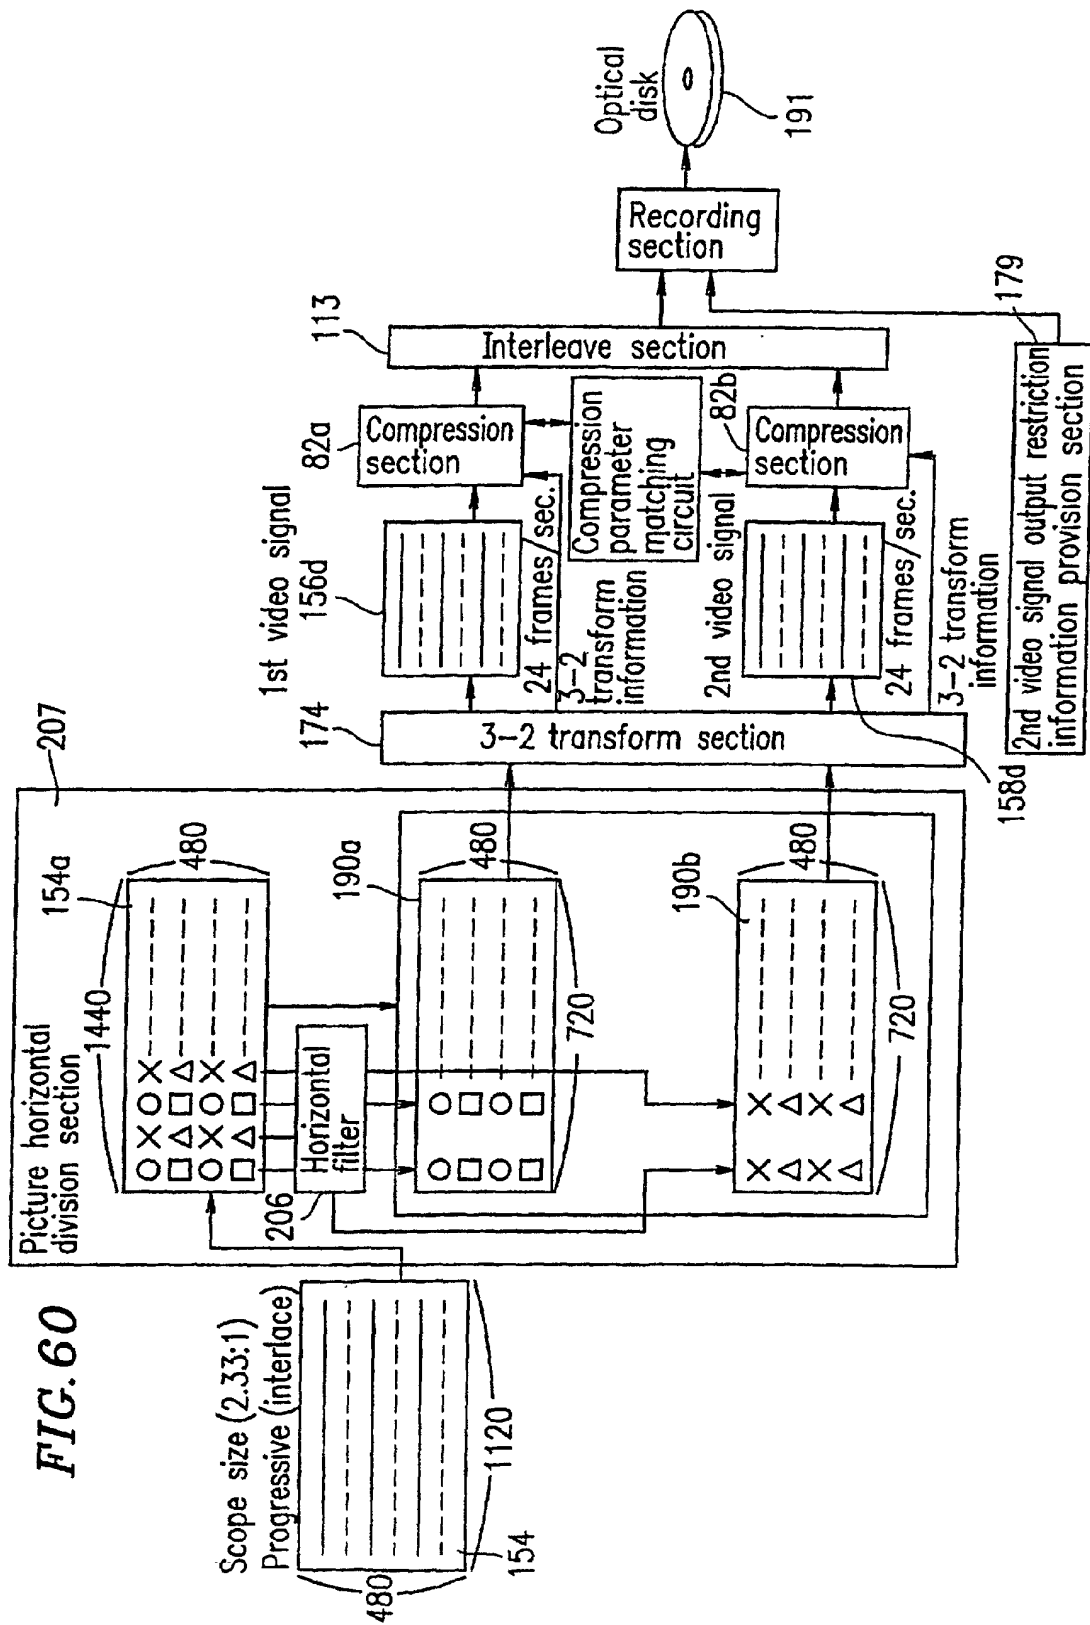FIG. 59







PSDM: Principle of PSDM (provider defined stream multiplex) system

■ Disk production apparatus

FIG. 61

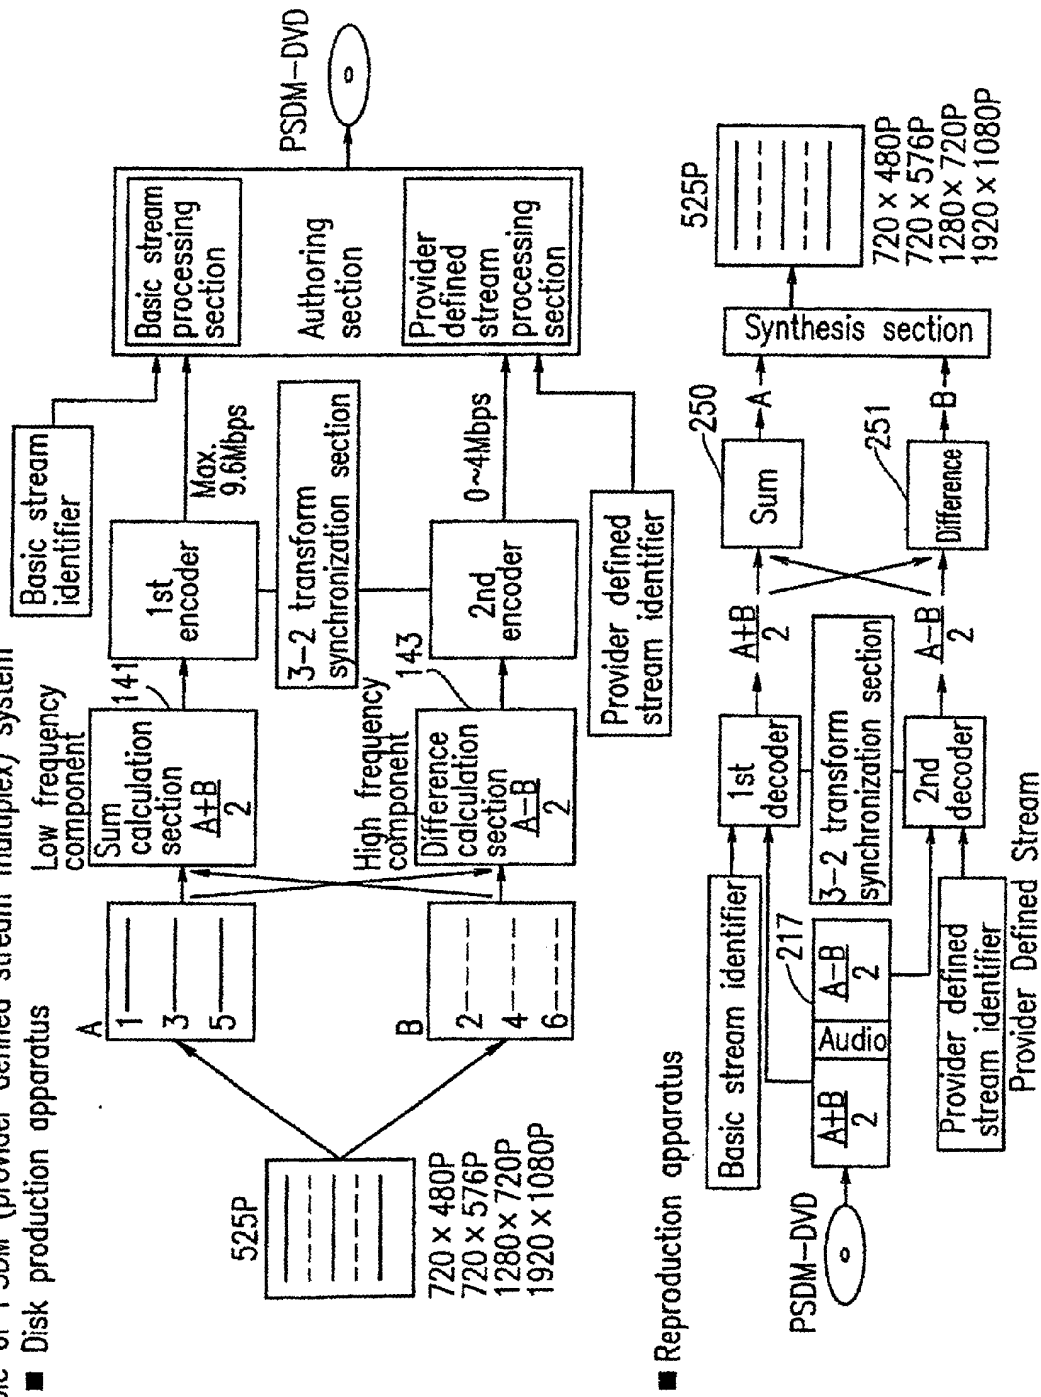

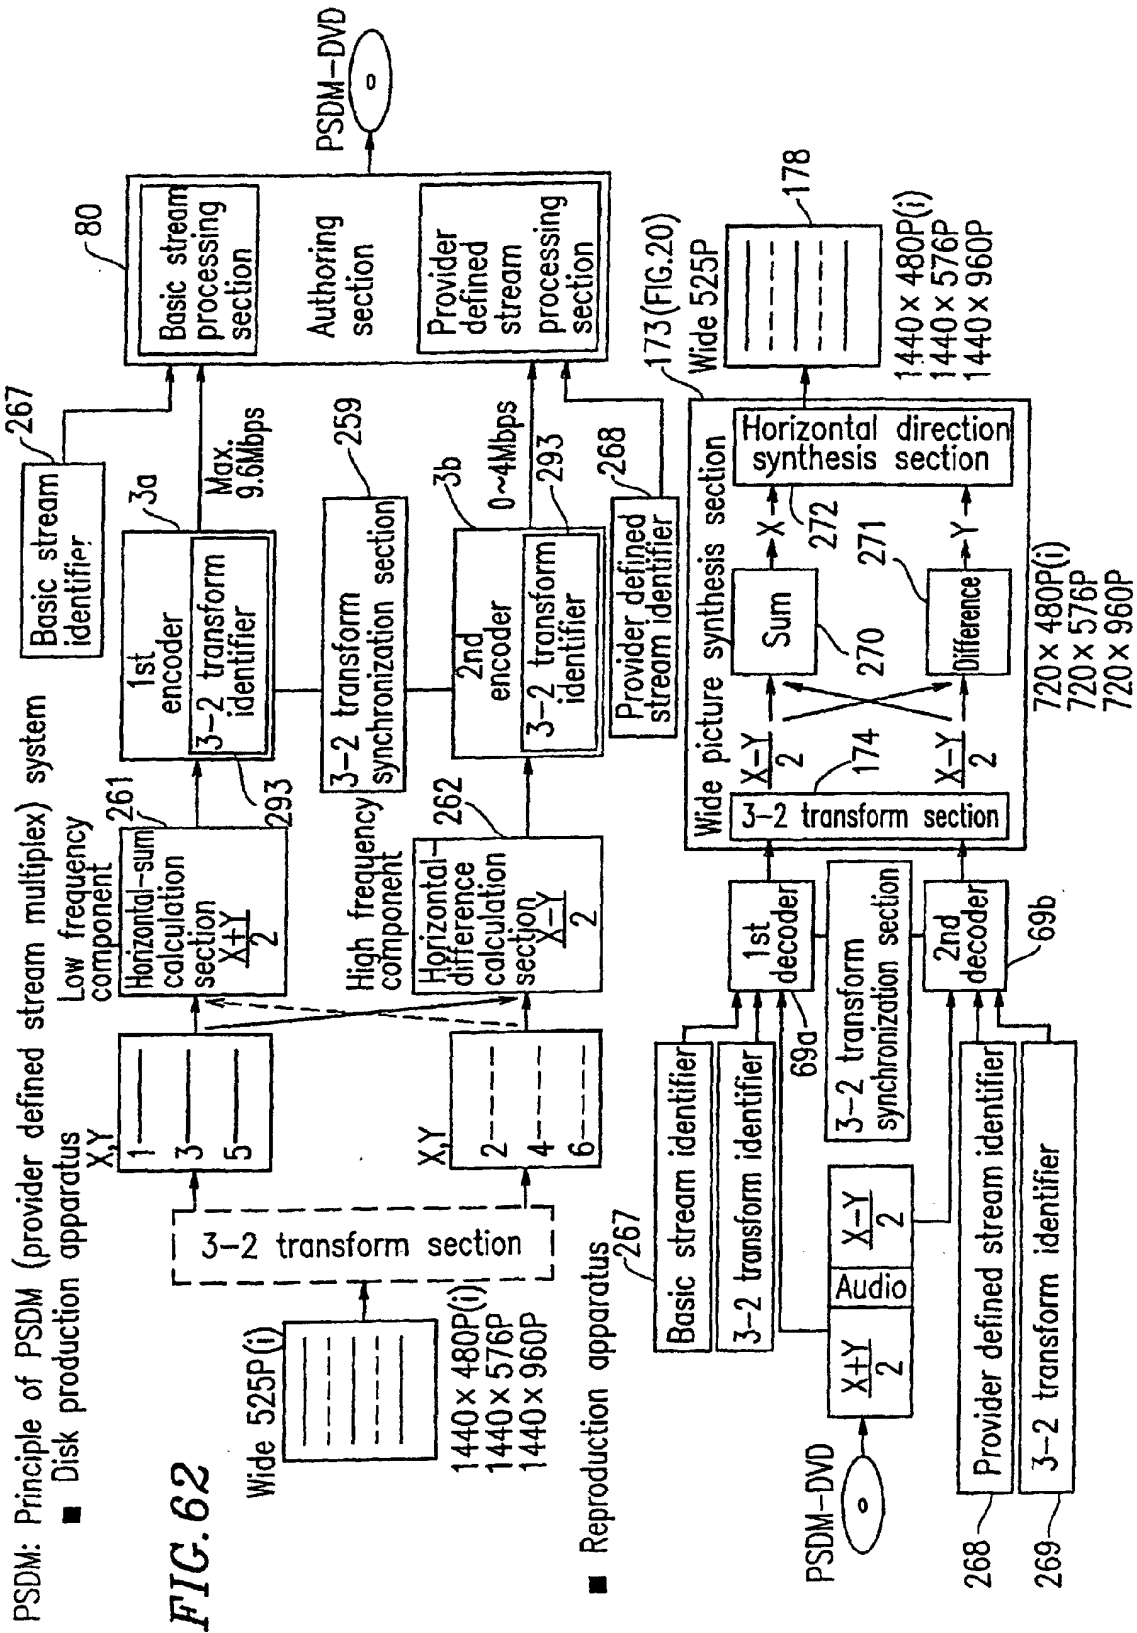


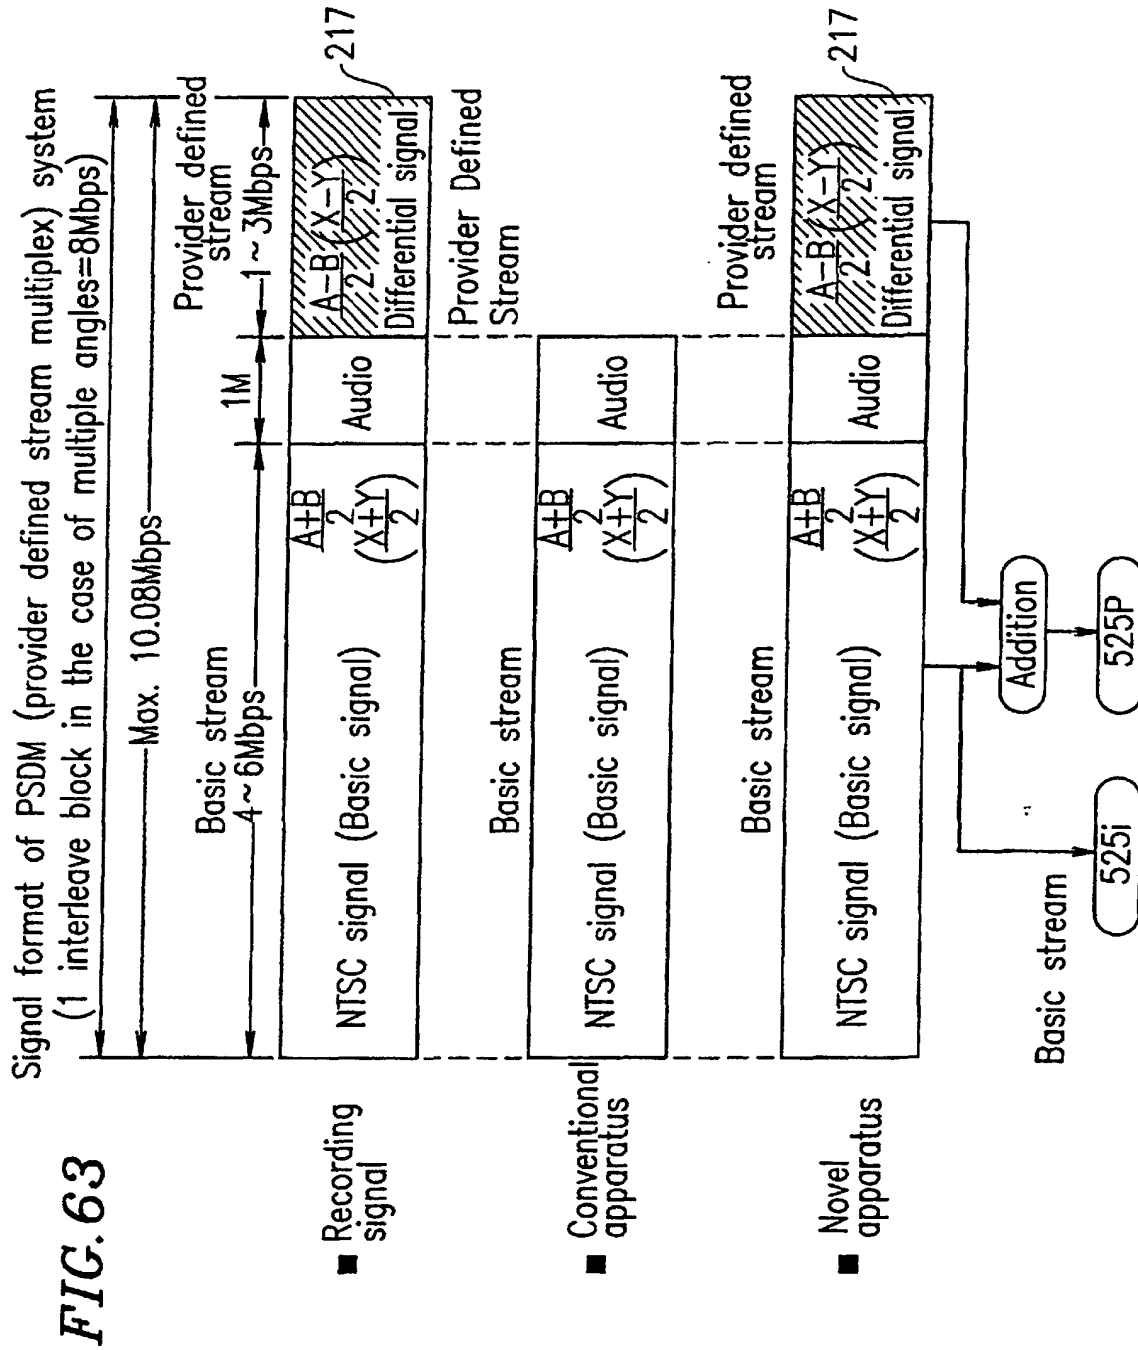


FIG. 64

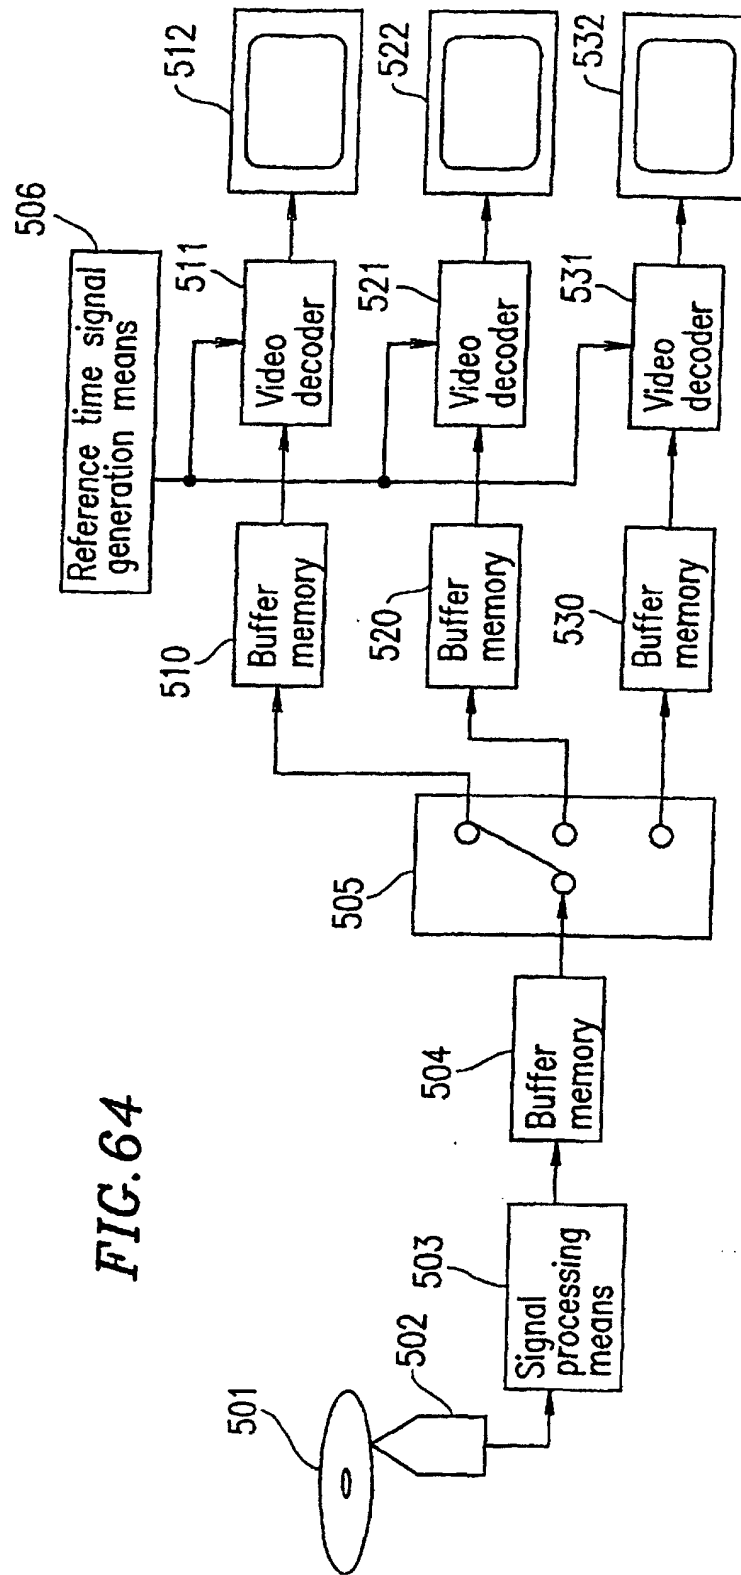




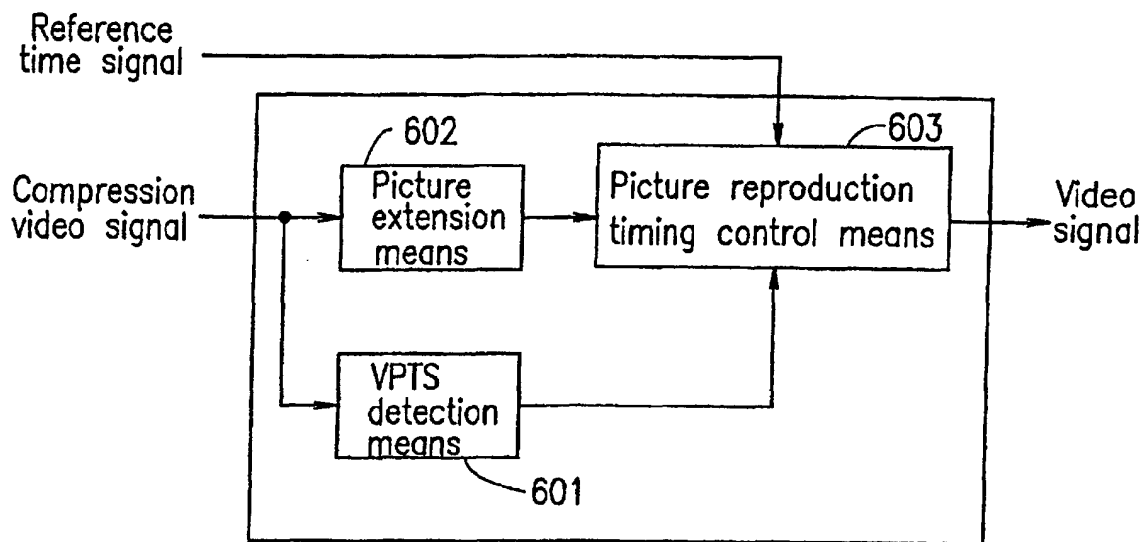
*FIG. 65*

FIG. 66

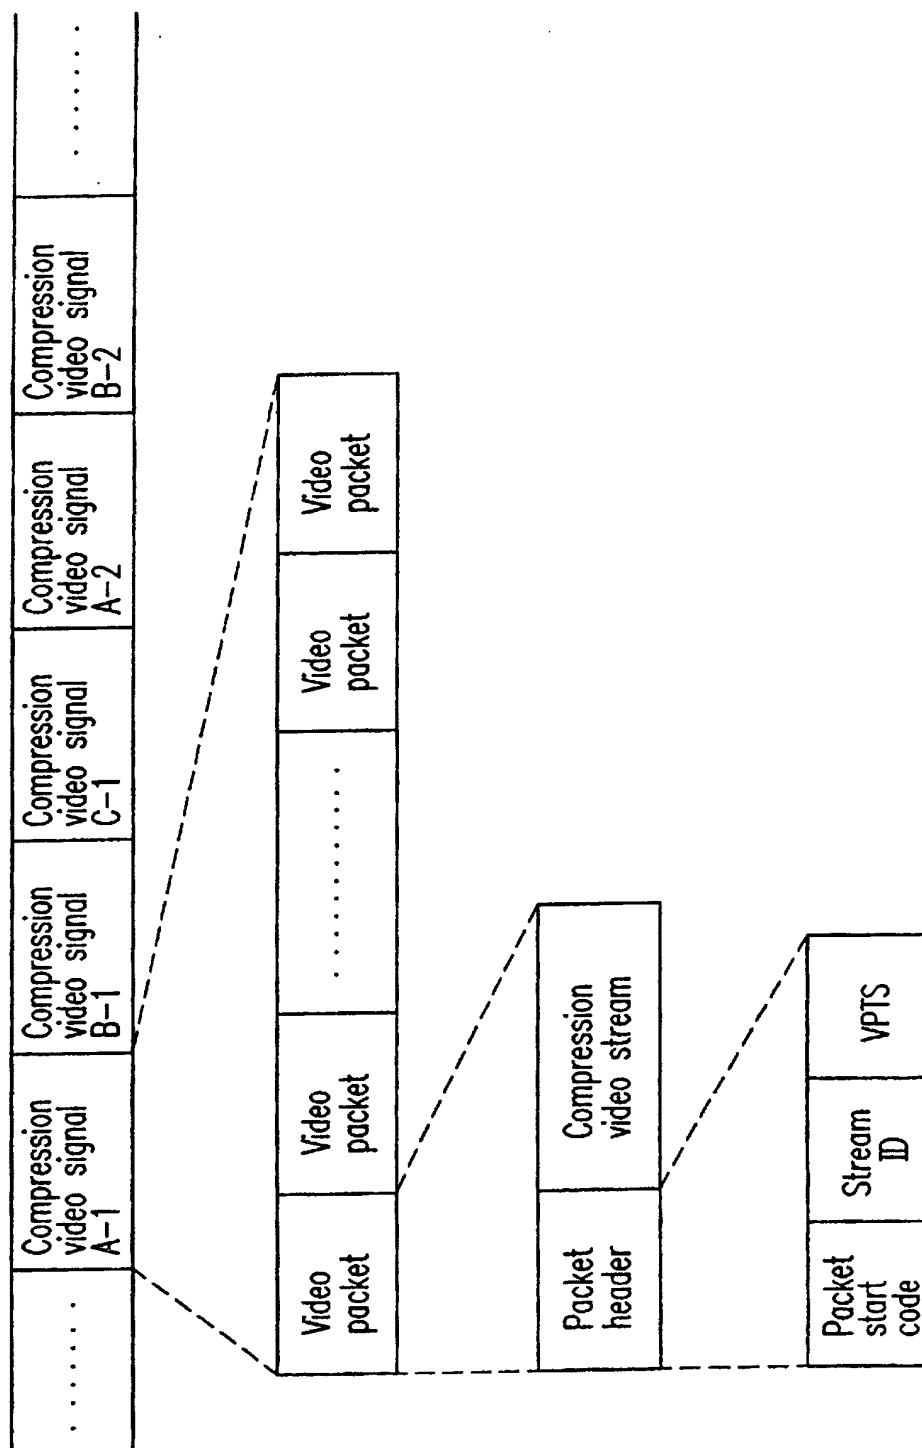

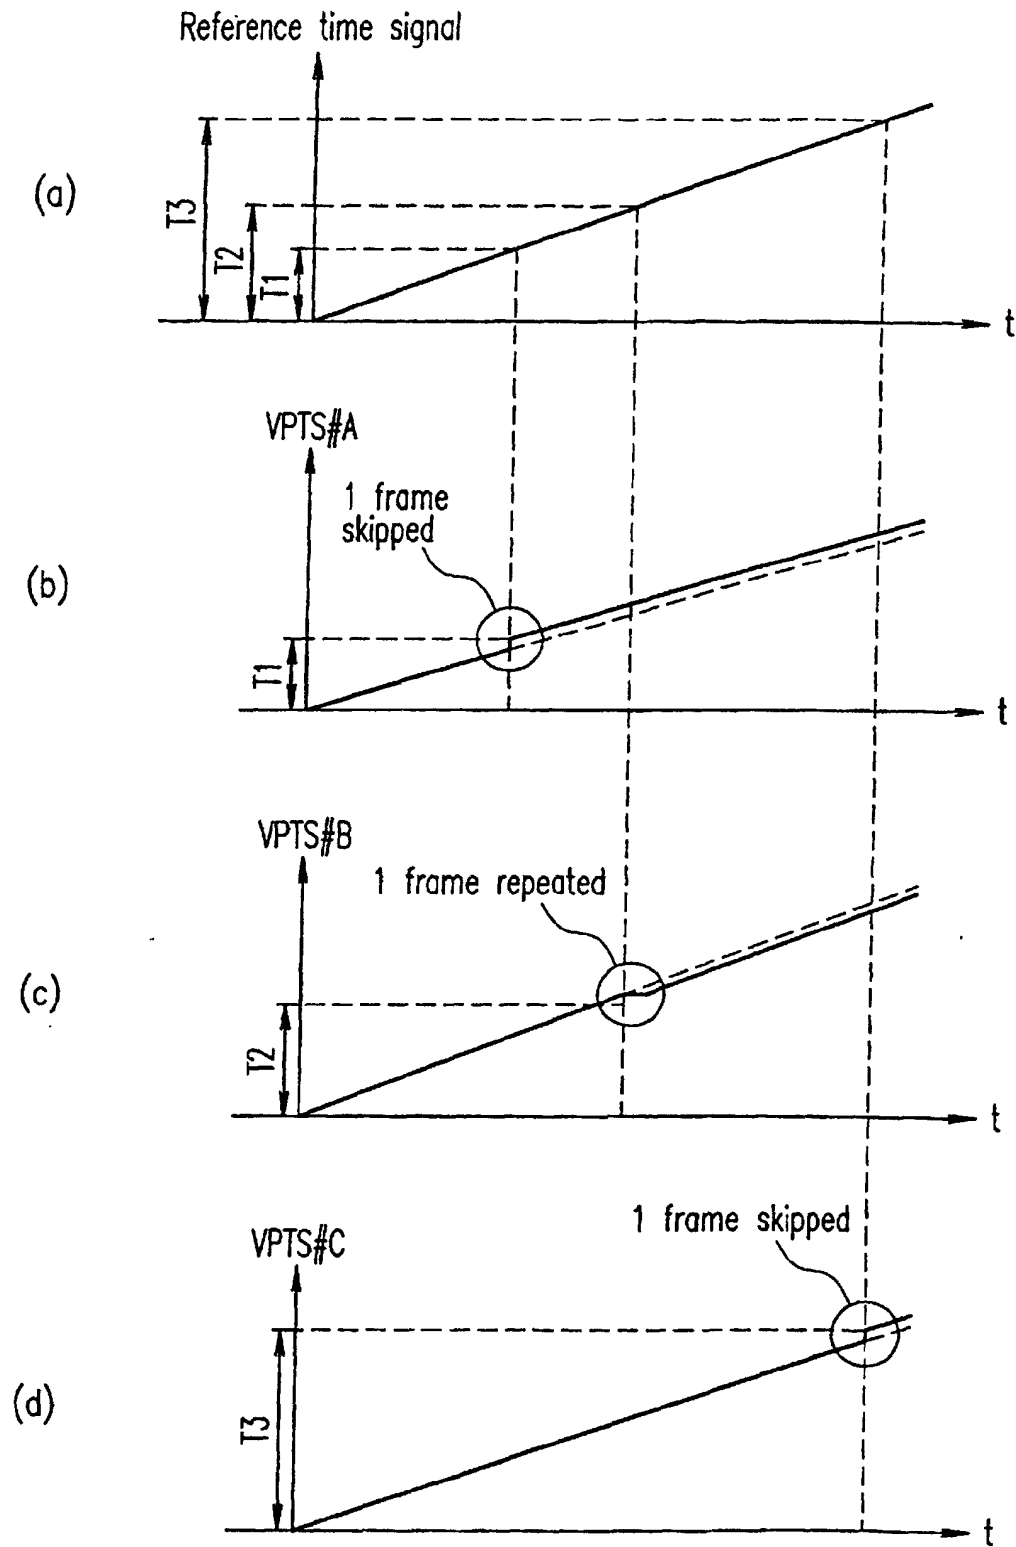

**FIG. 67**

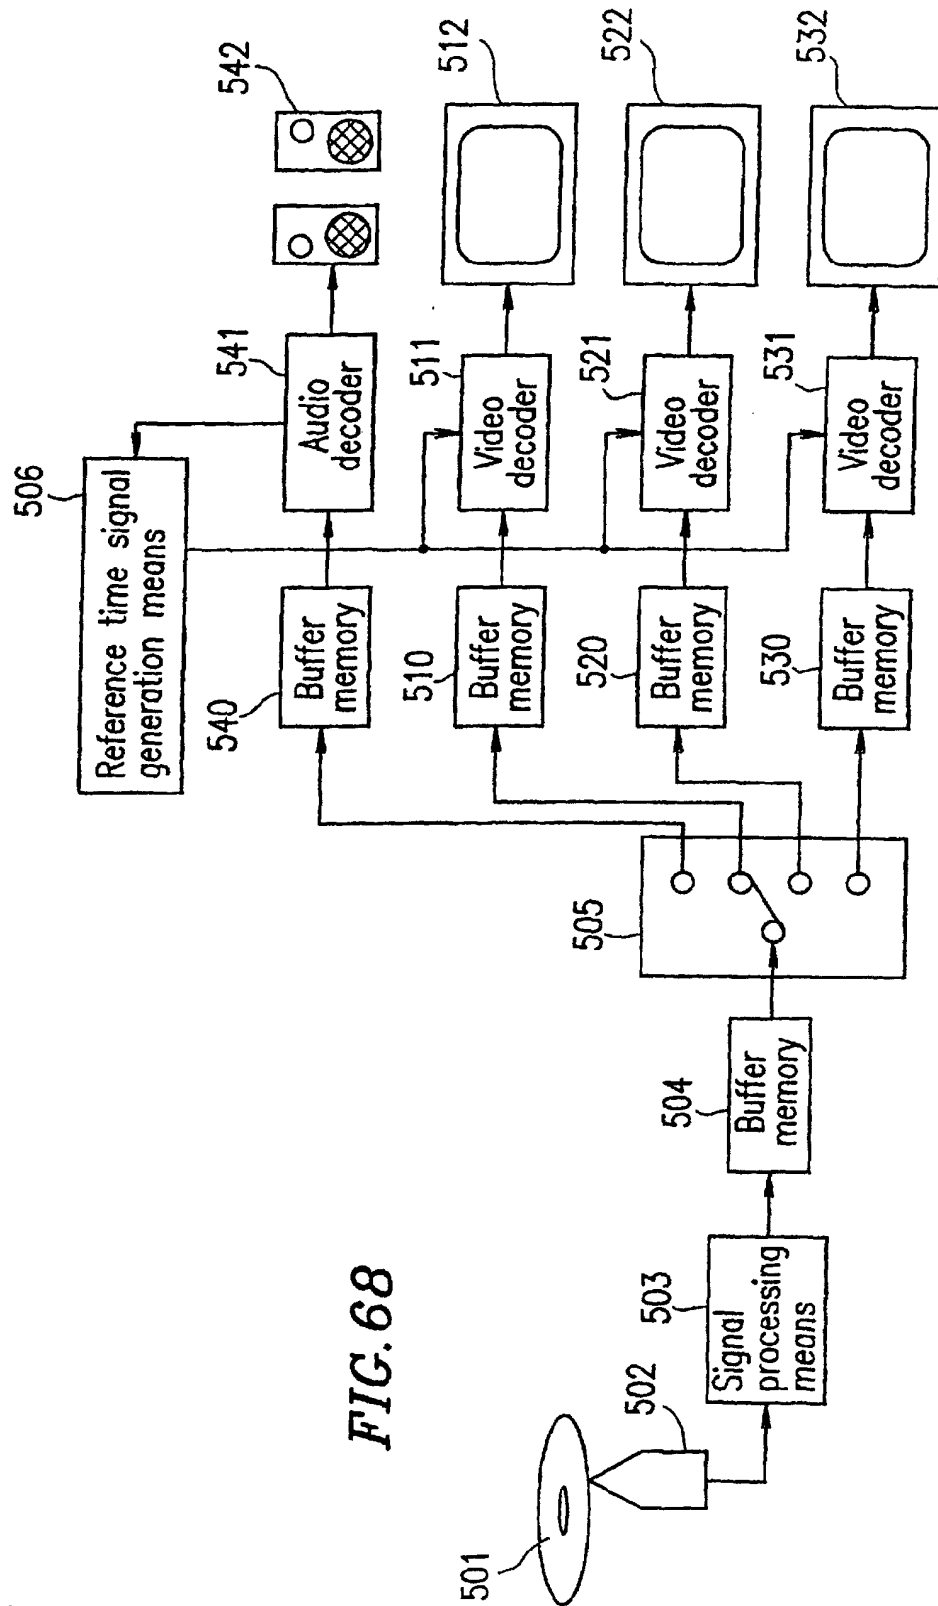

*FIG. 69*

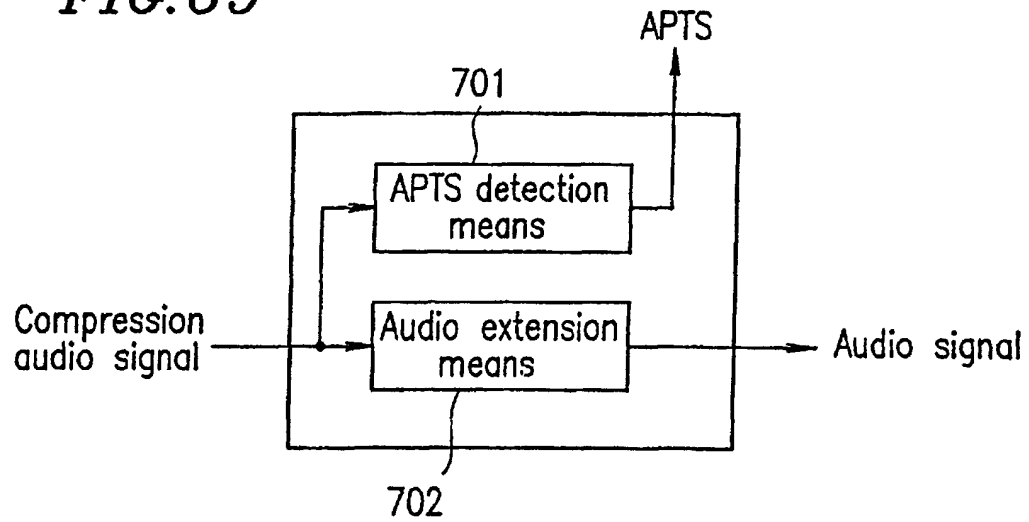


FIG. 70

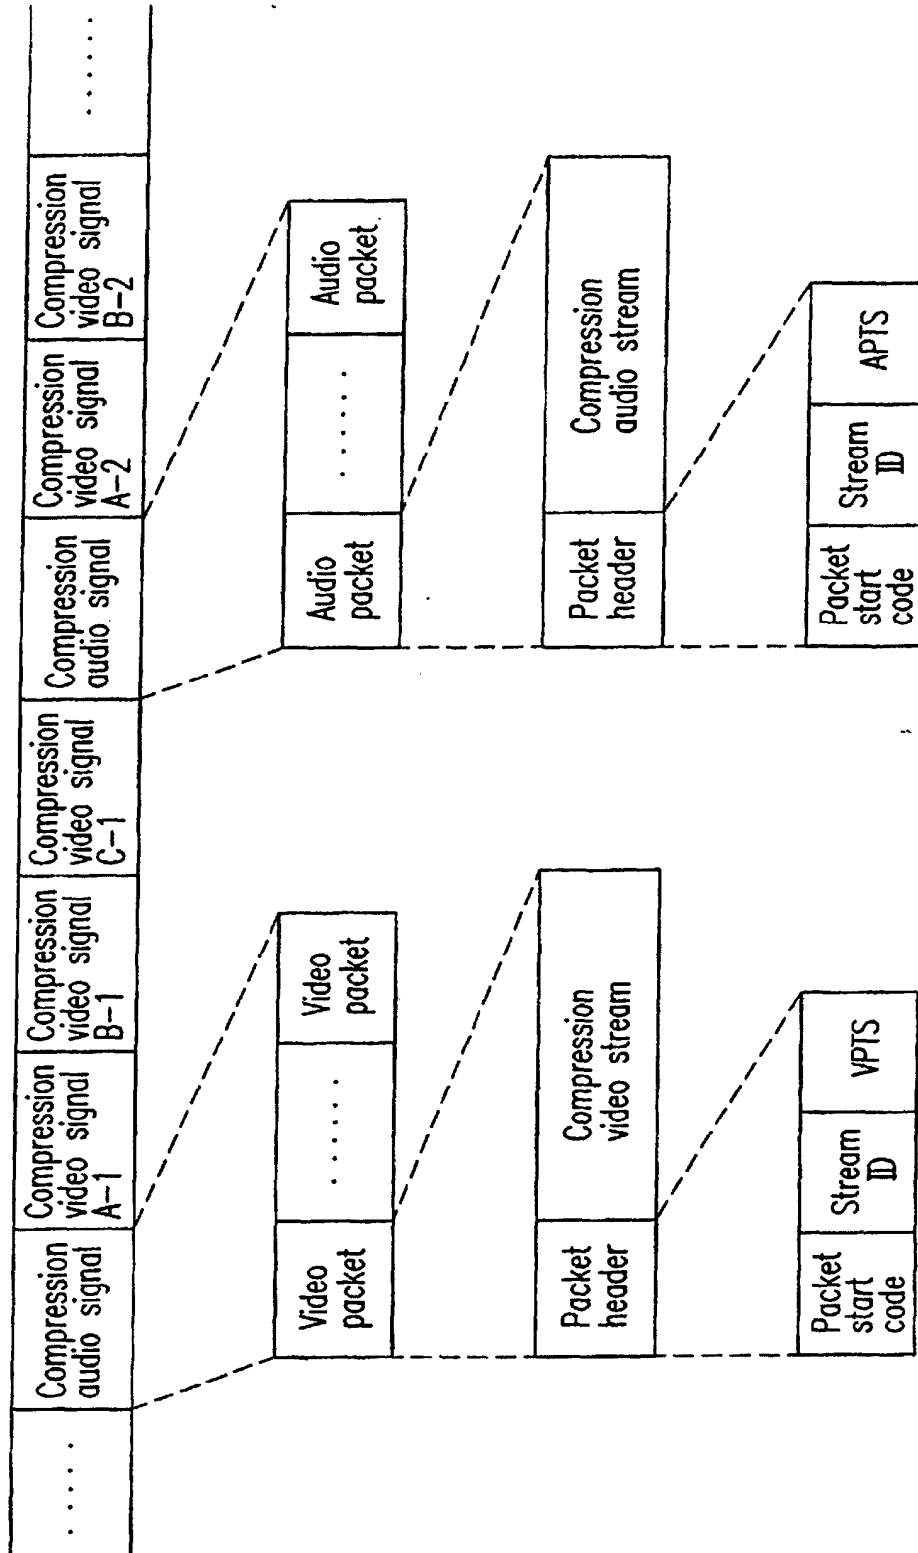


FIG. 71


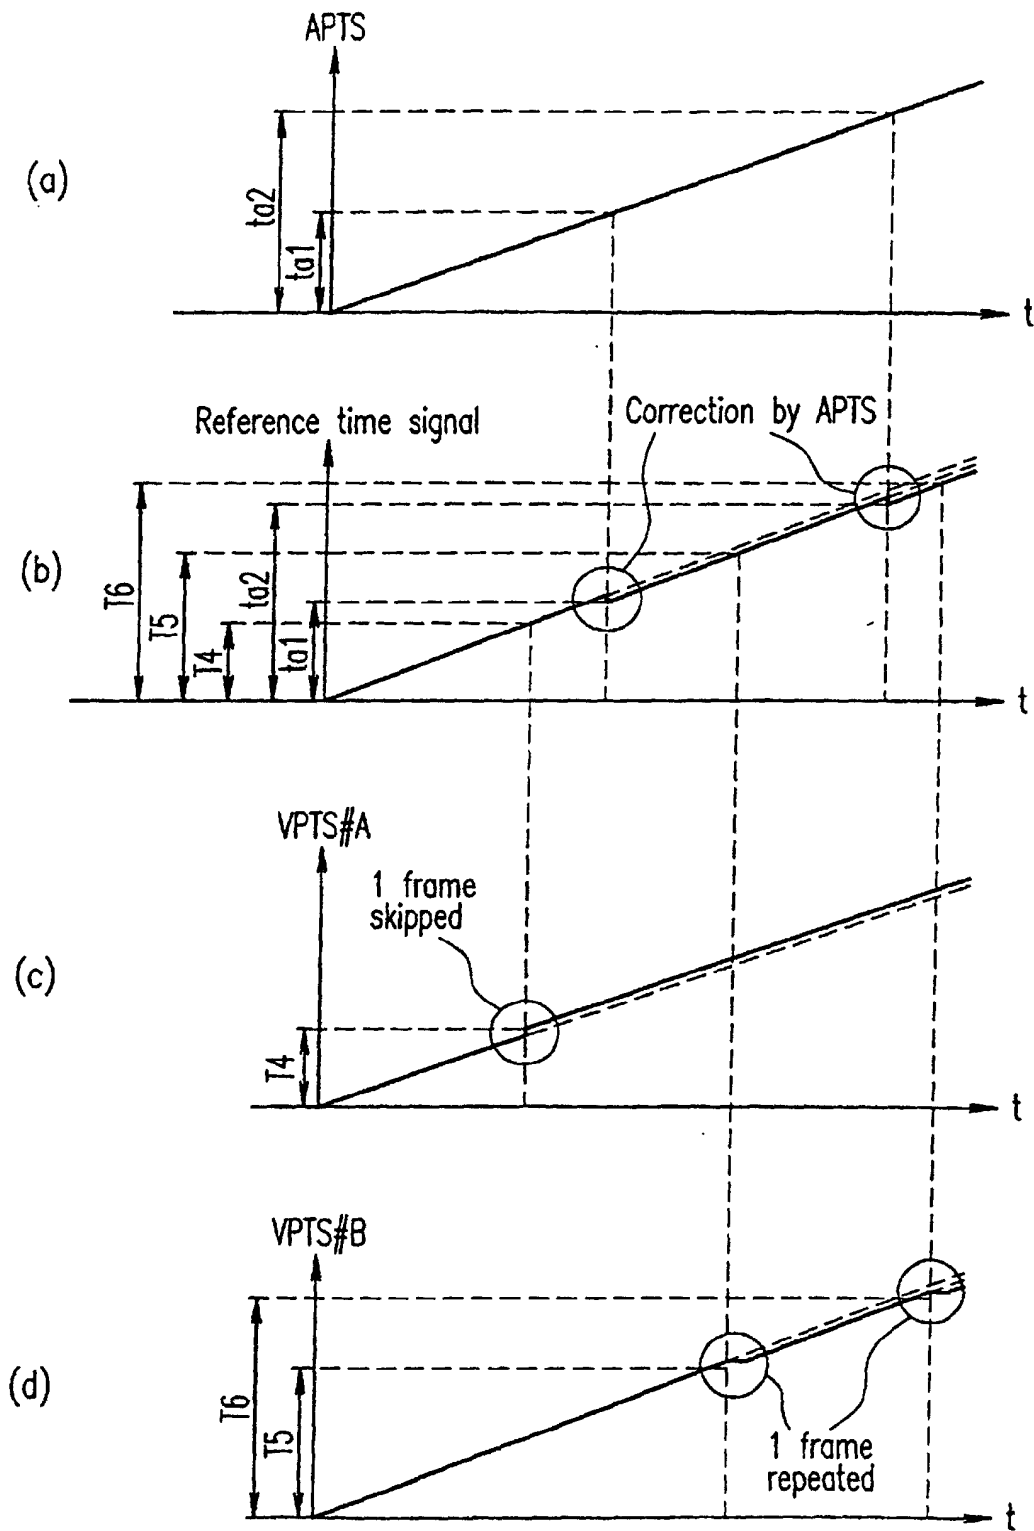


FIG. 72

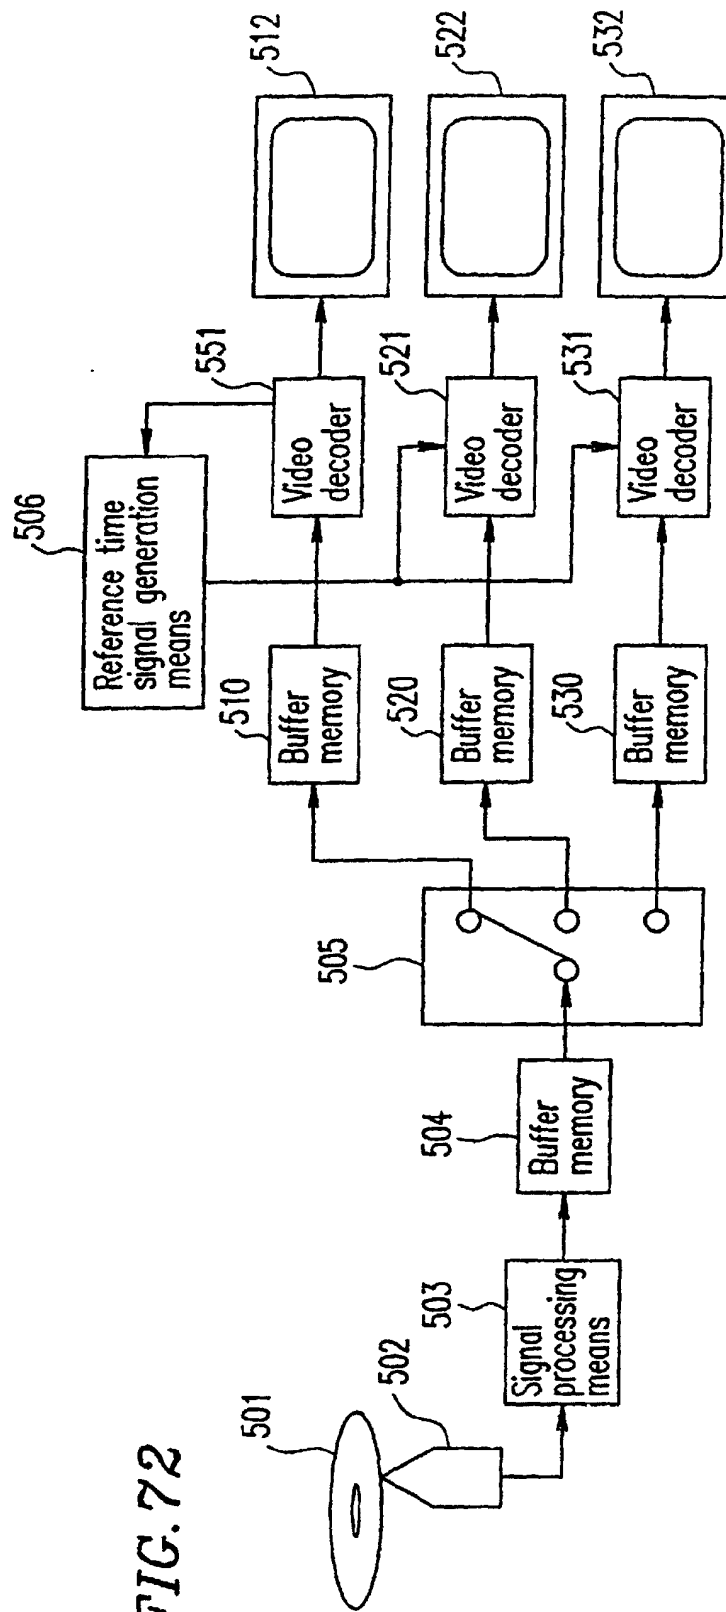

*FIG. 73*

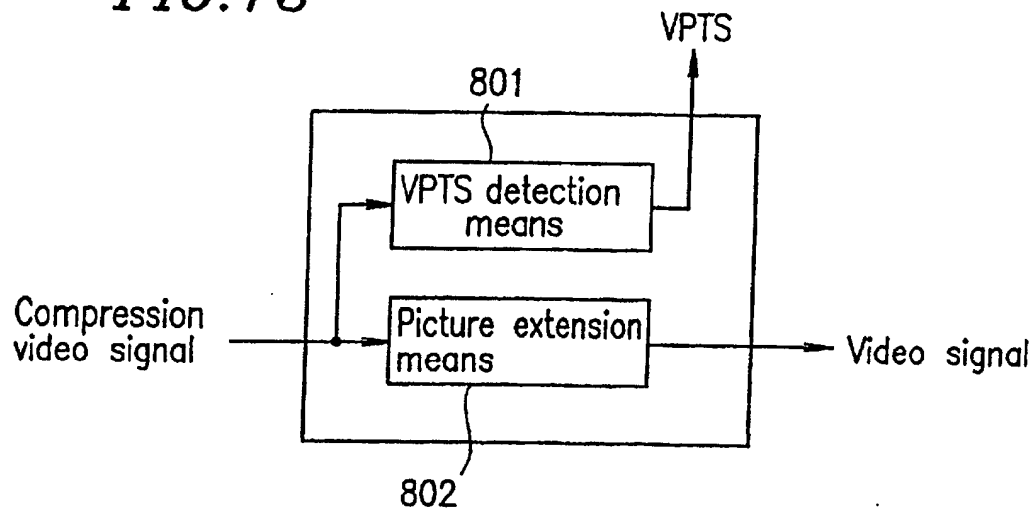


FIG. 74


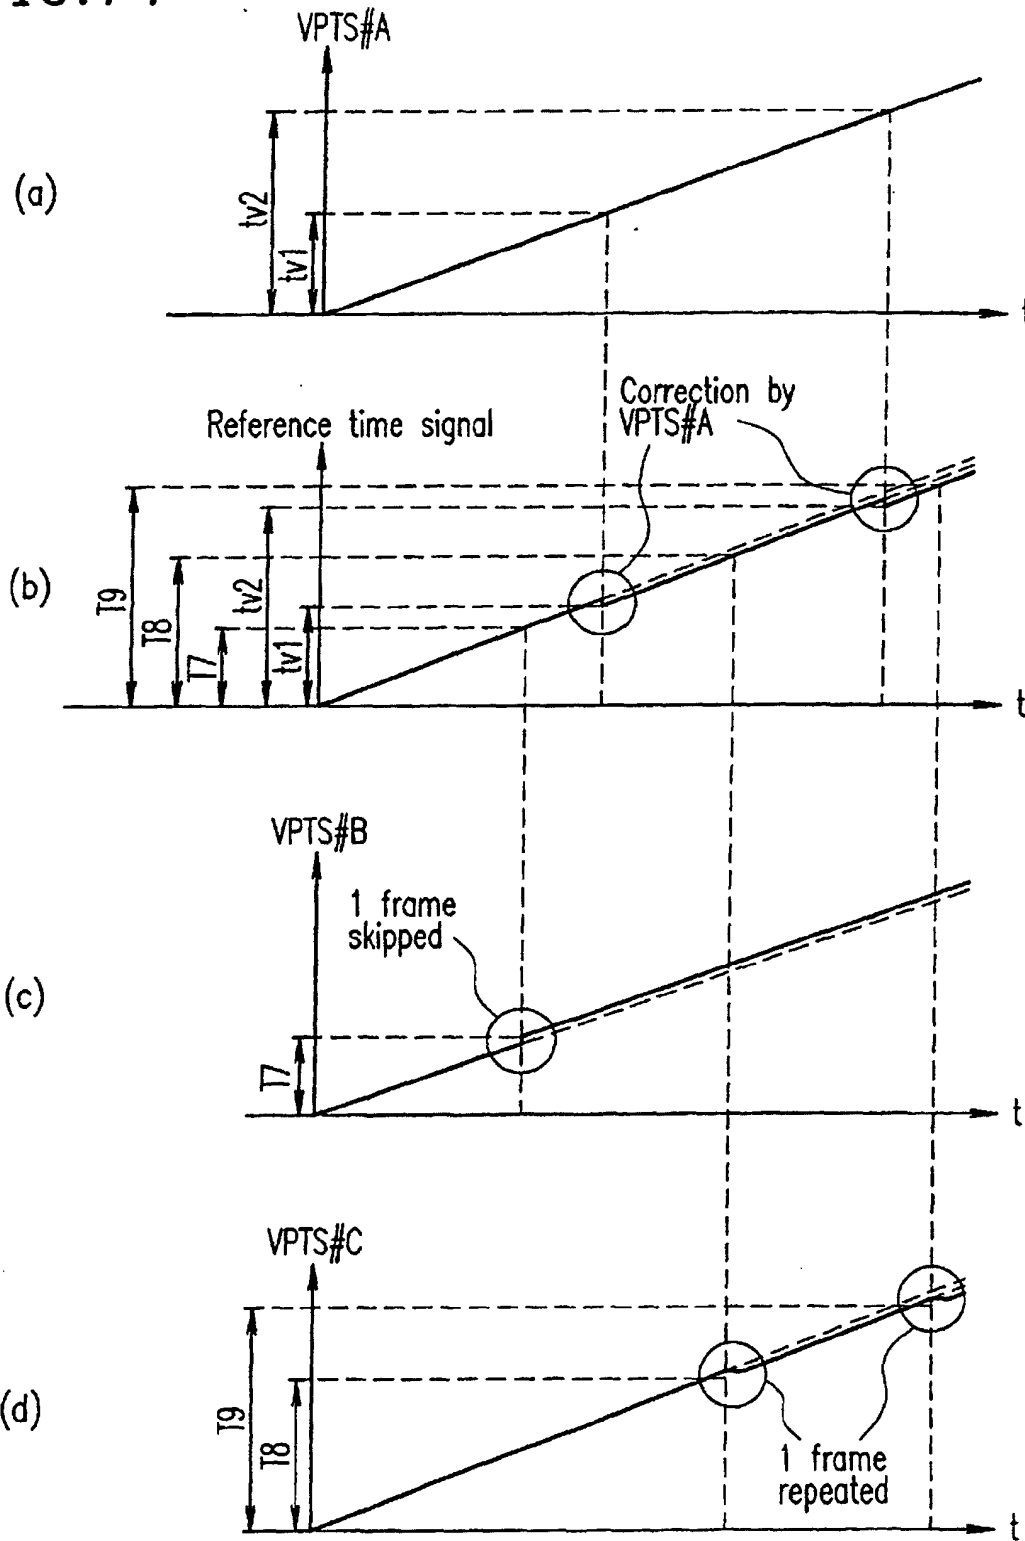




FIG. 75

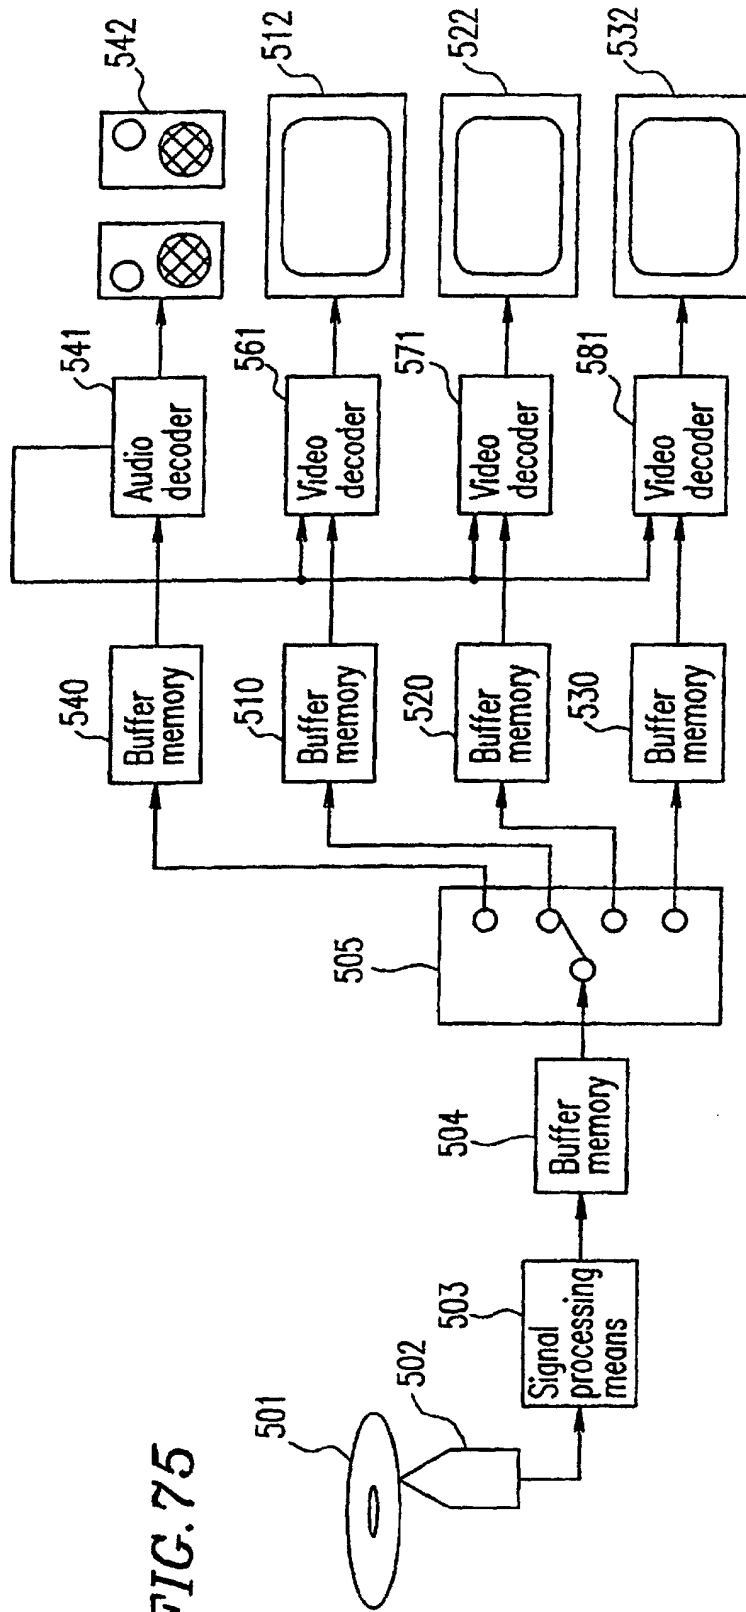


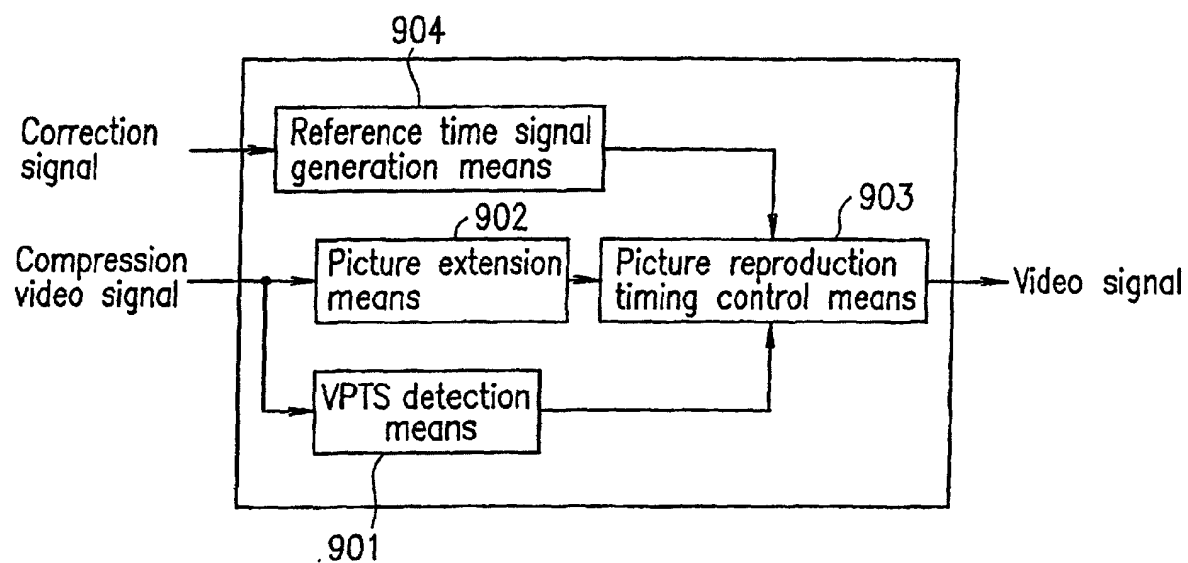
*FIG. 76*

FIG. 77

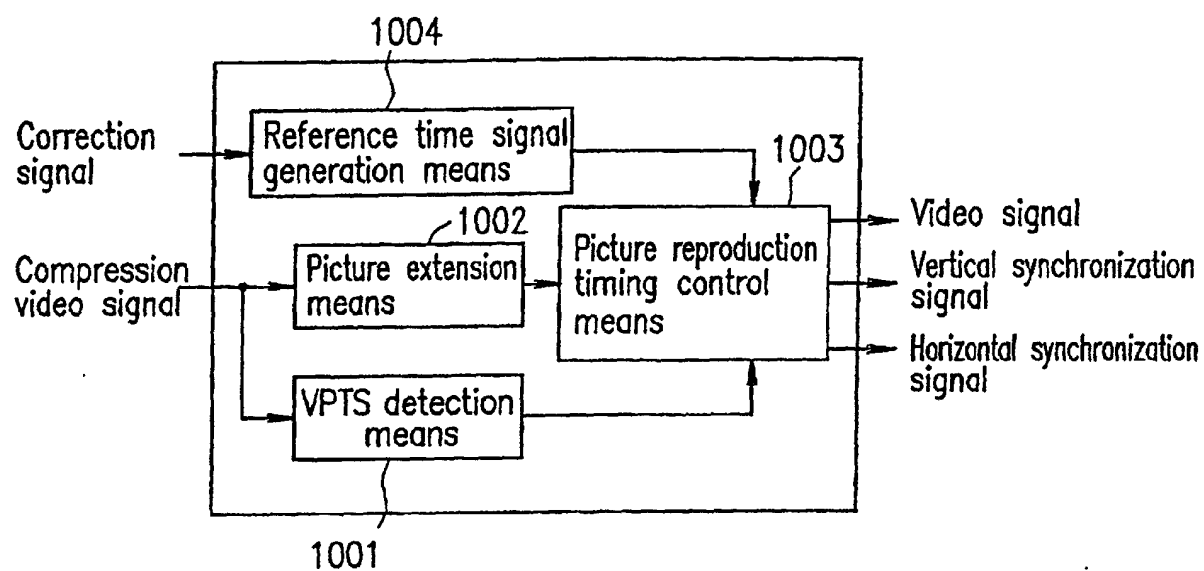


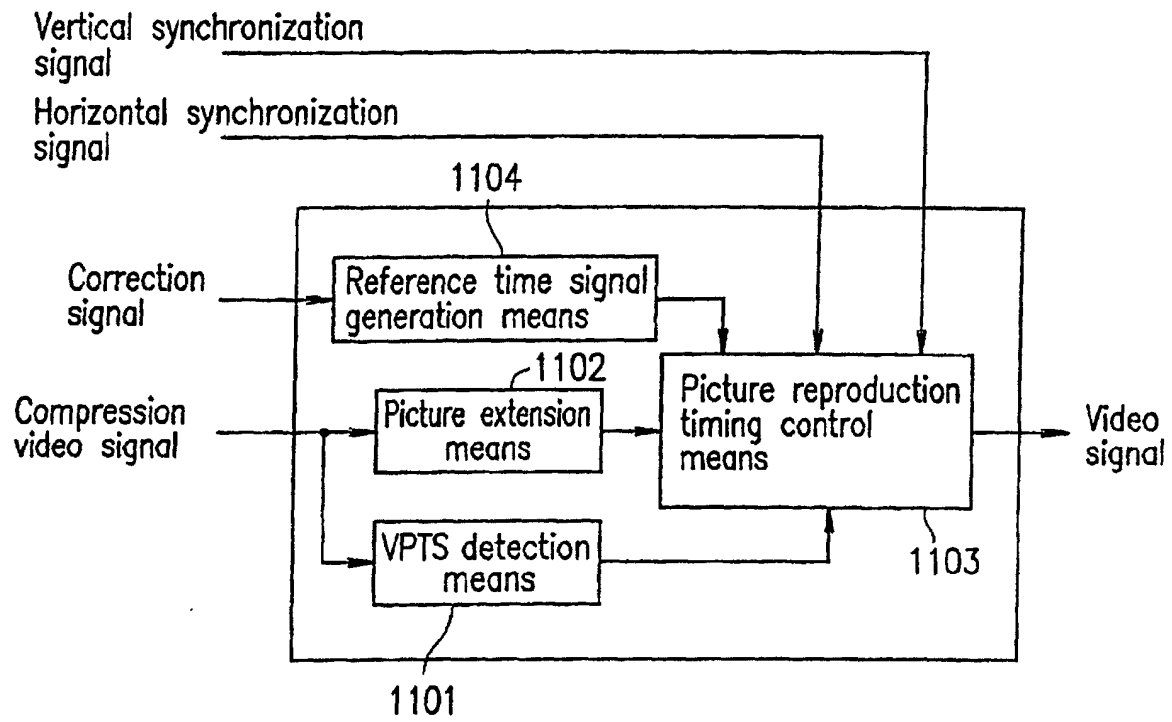
**FIG. 78**

FIG. 79

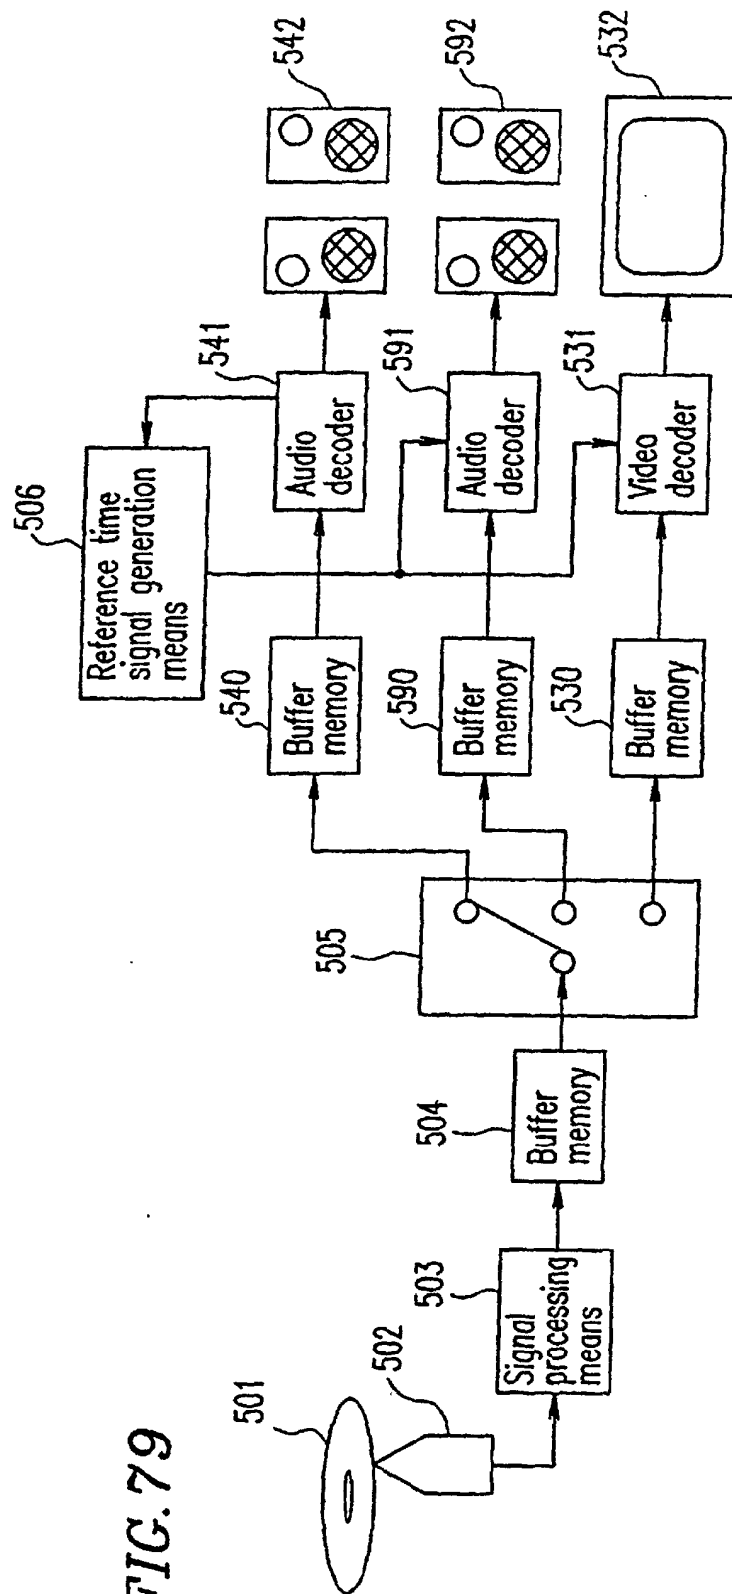


*FIG. 80*

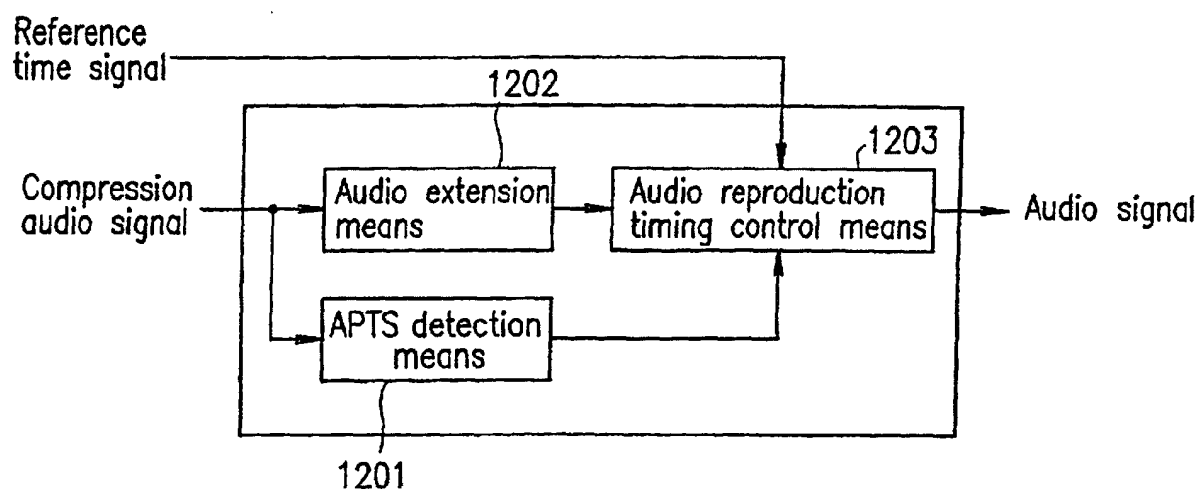FIG. 81



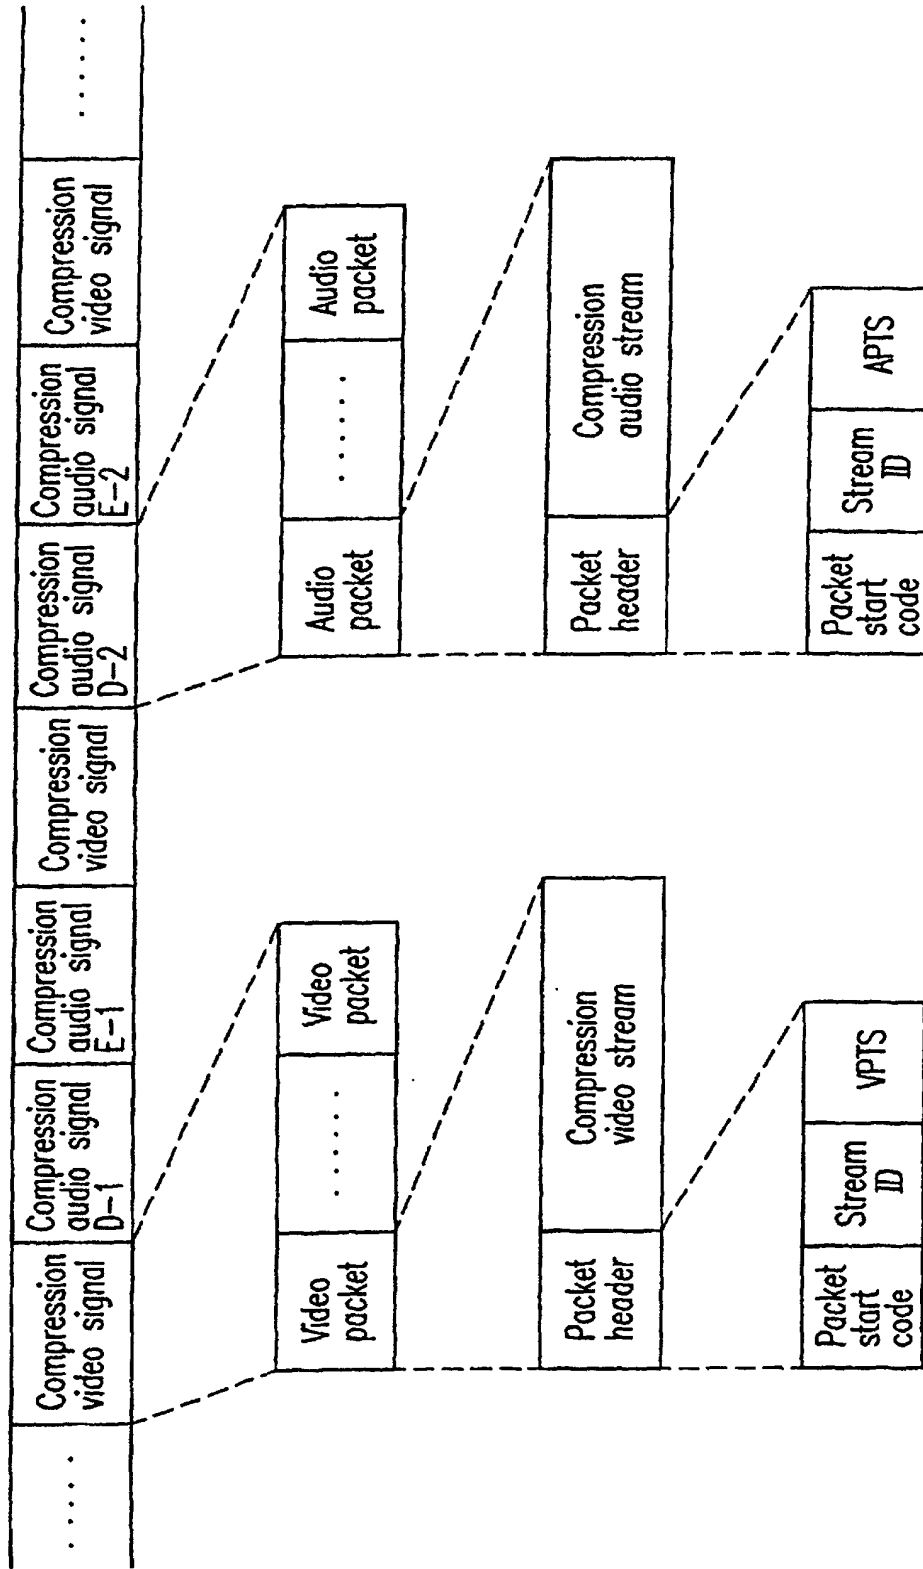


FIG. 82

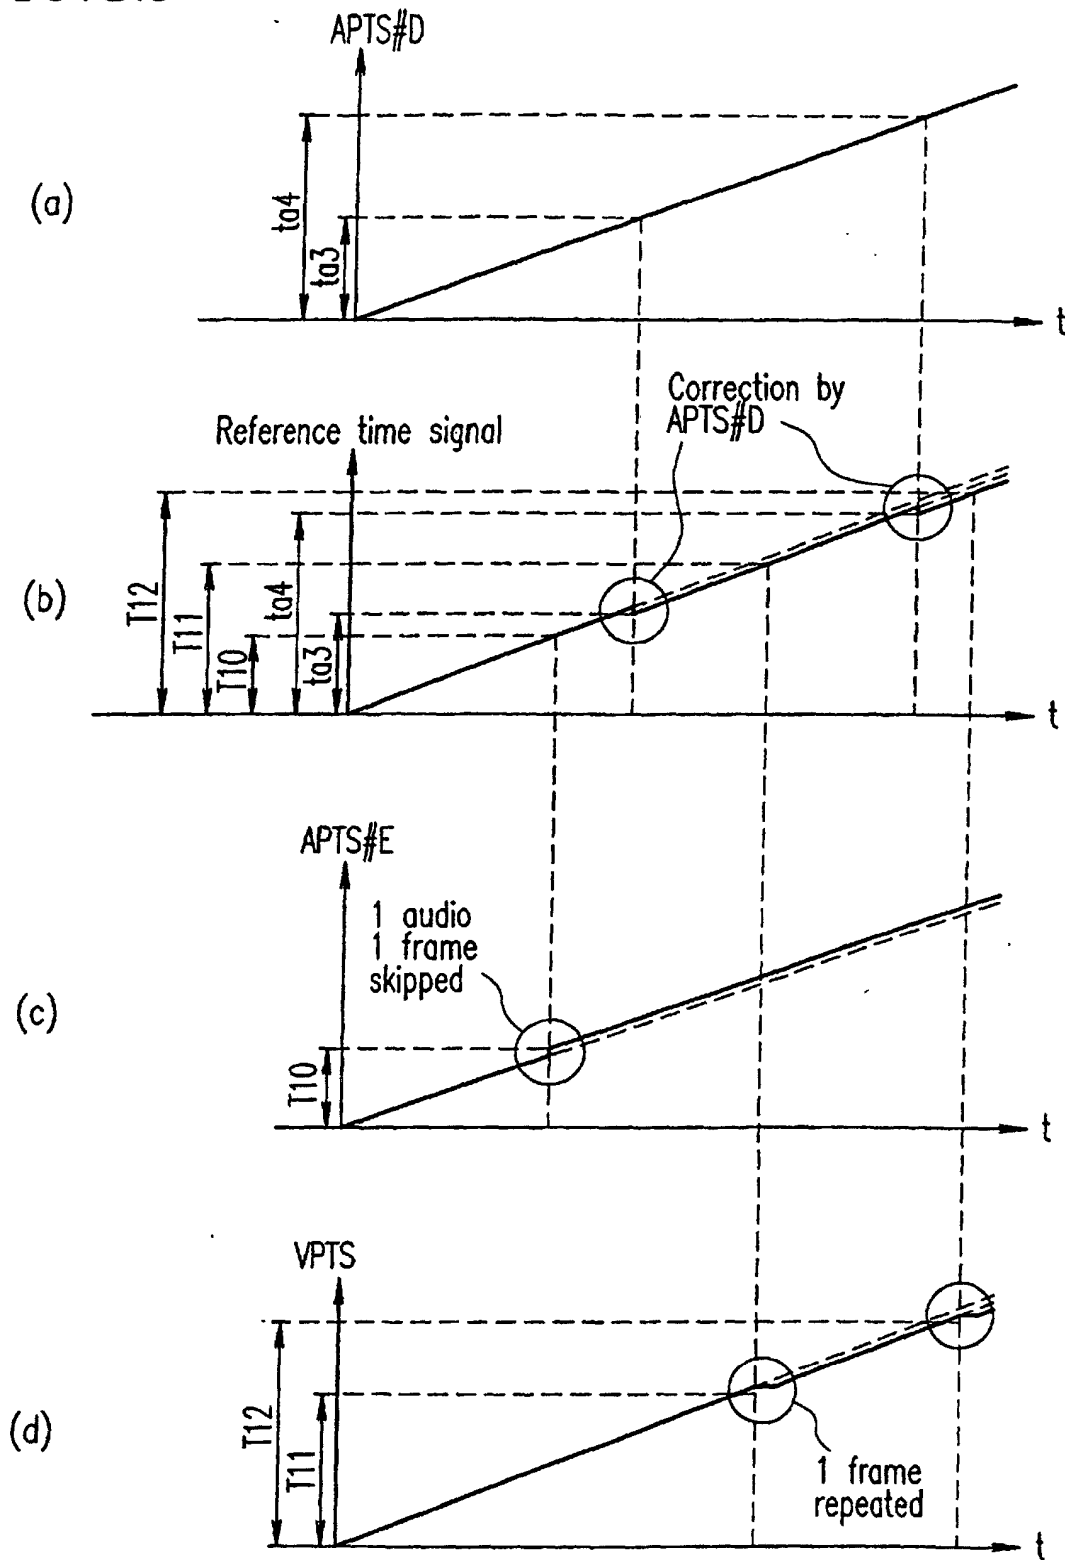

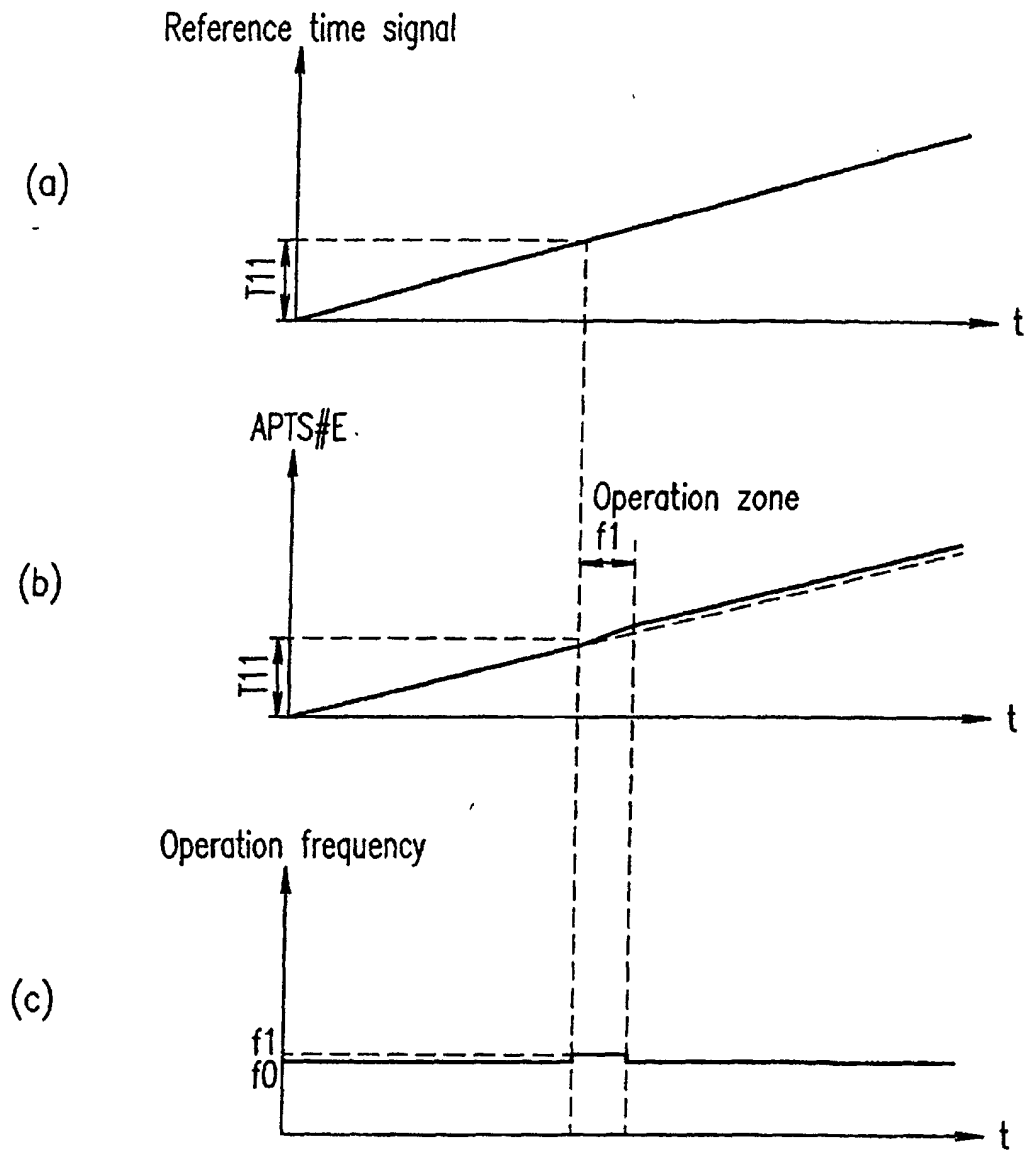

**FIG. 83**

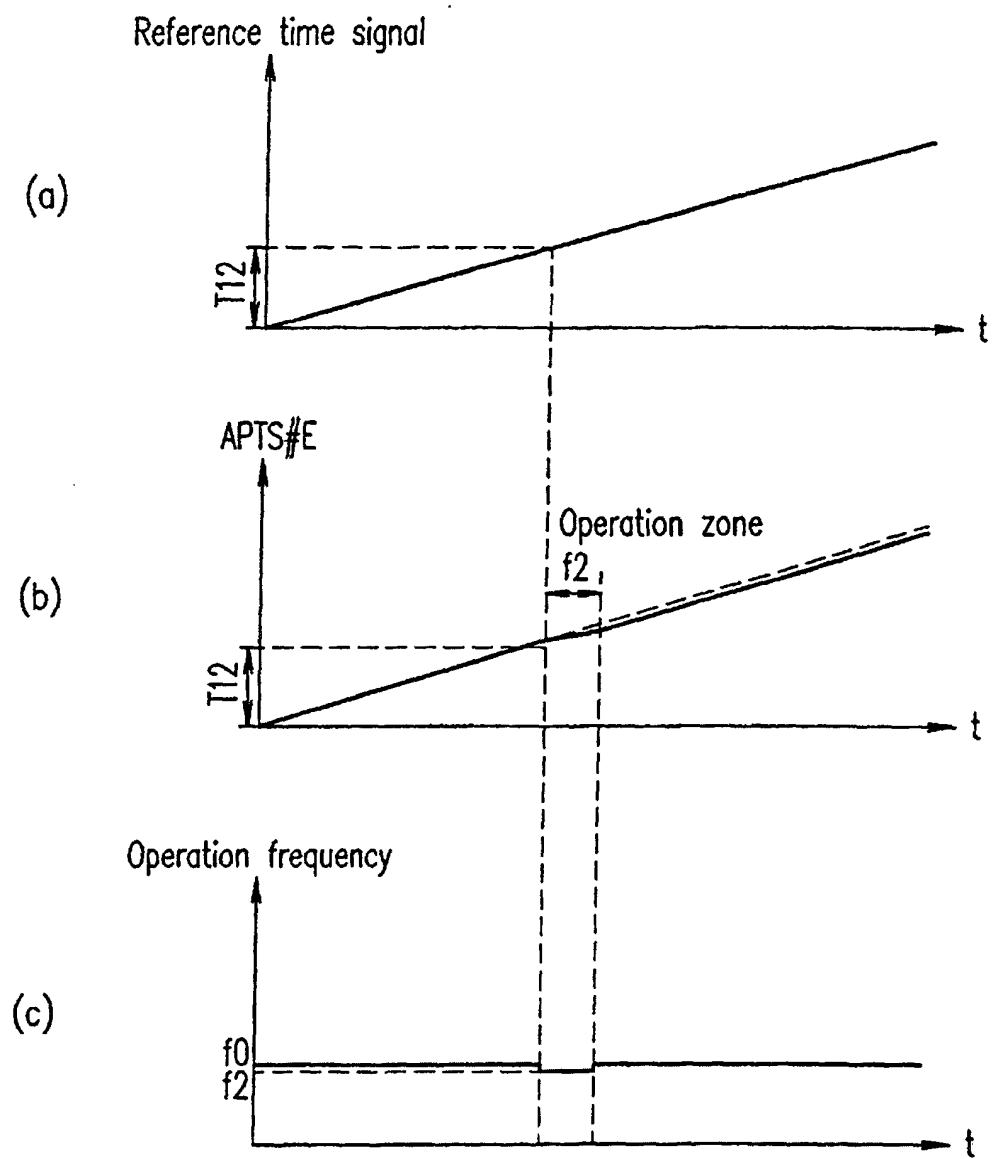
**FIG. 84**

FIG. 85

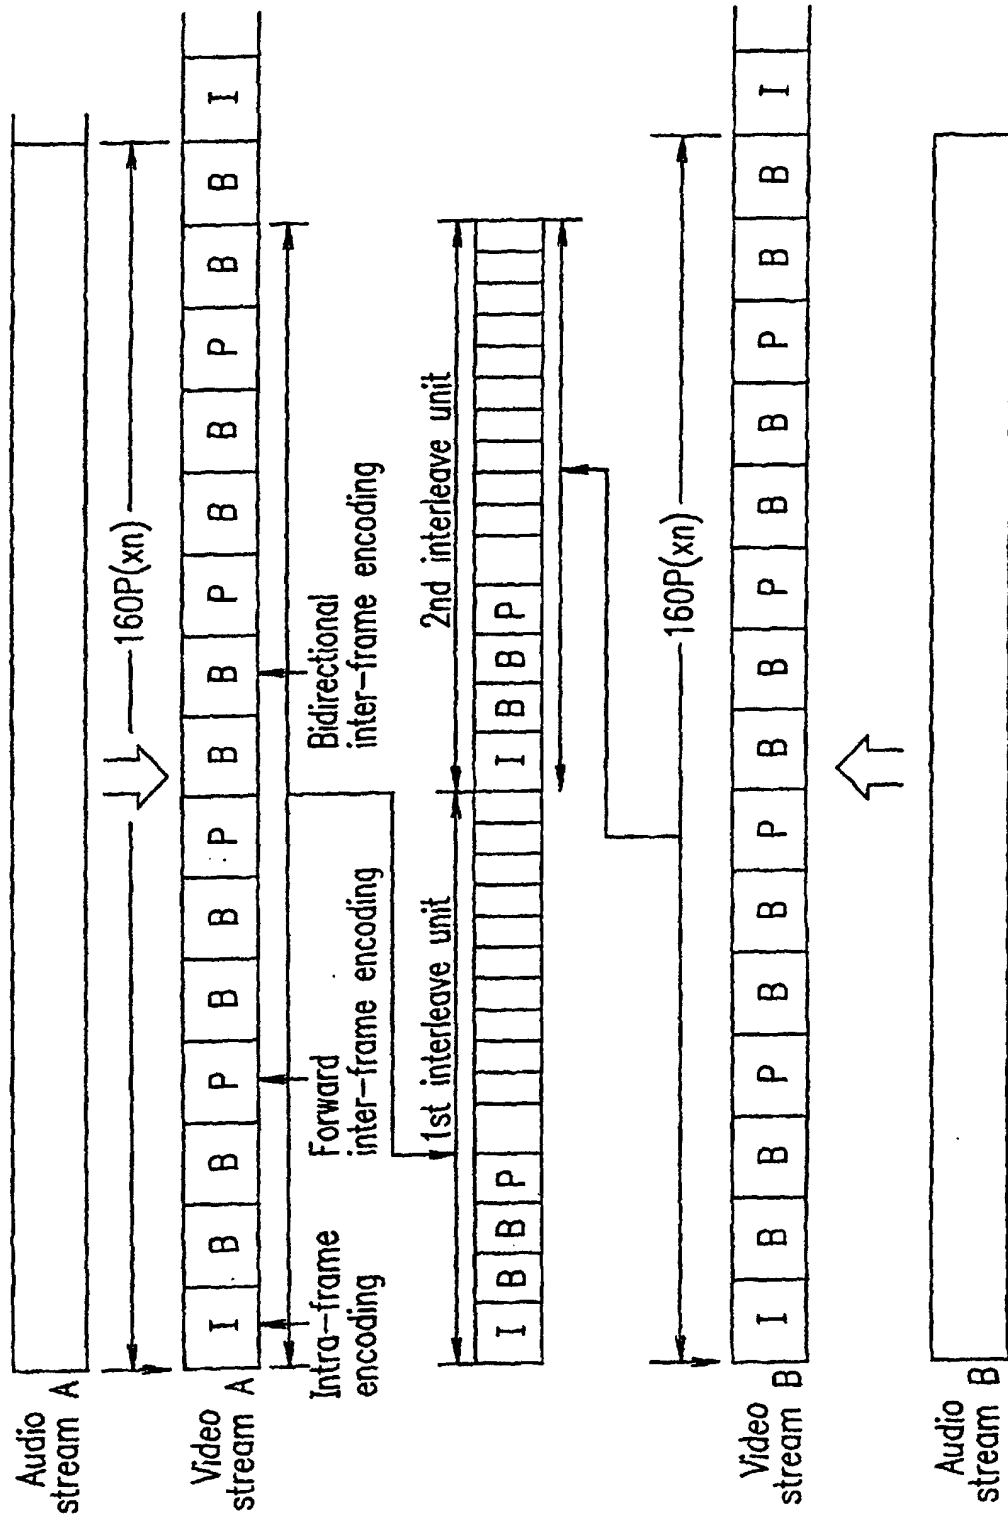


FIG. 86

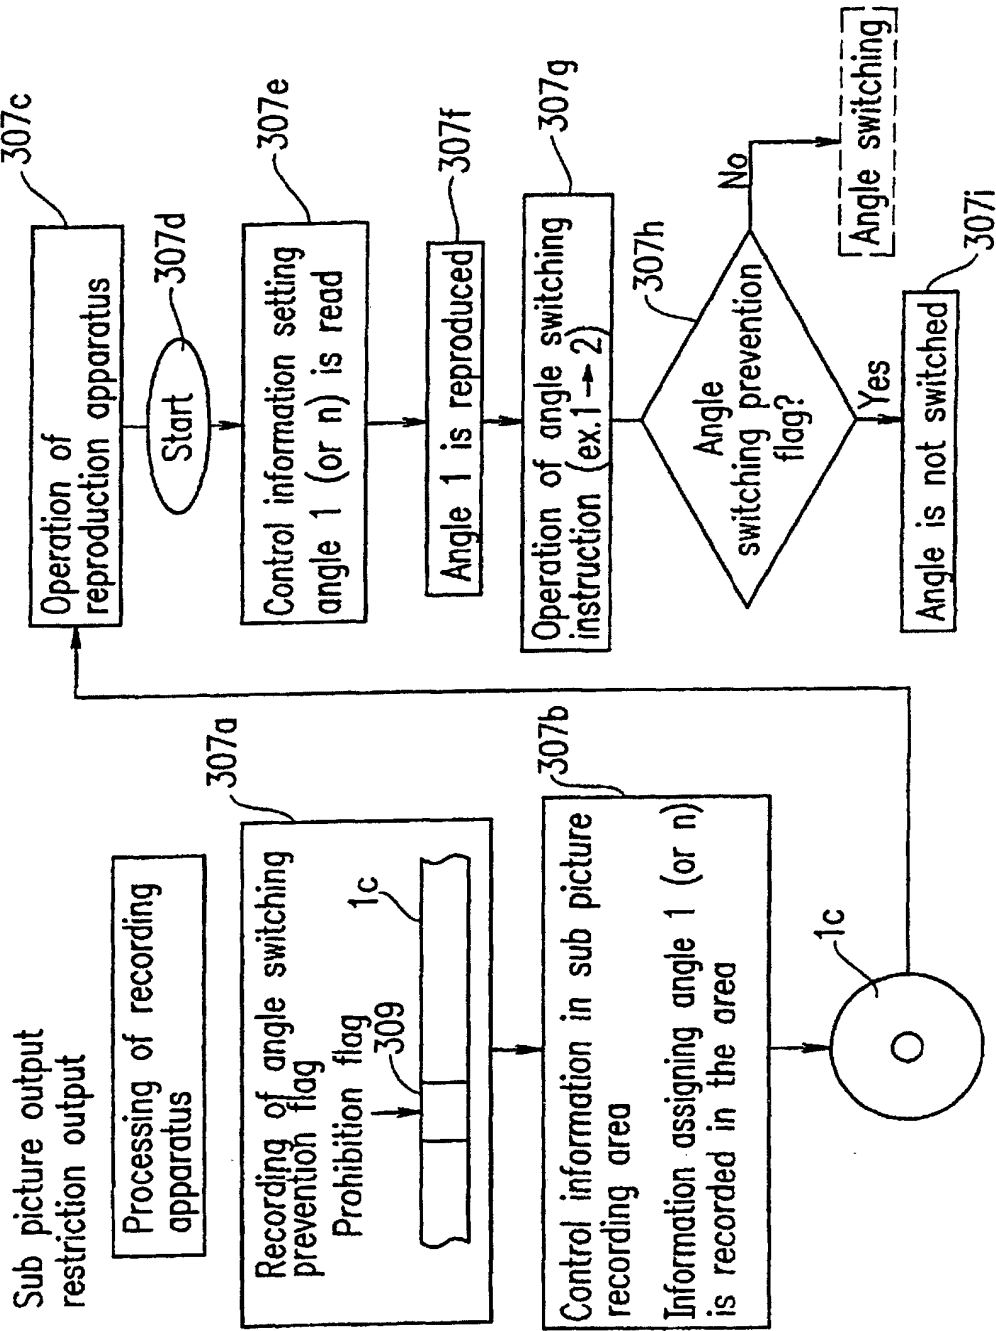


FIG. 87

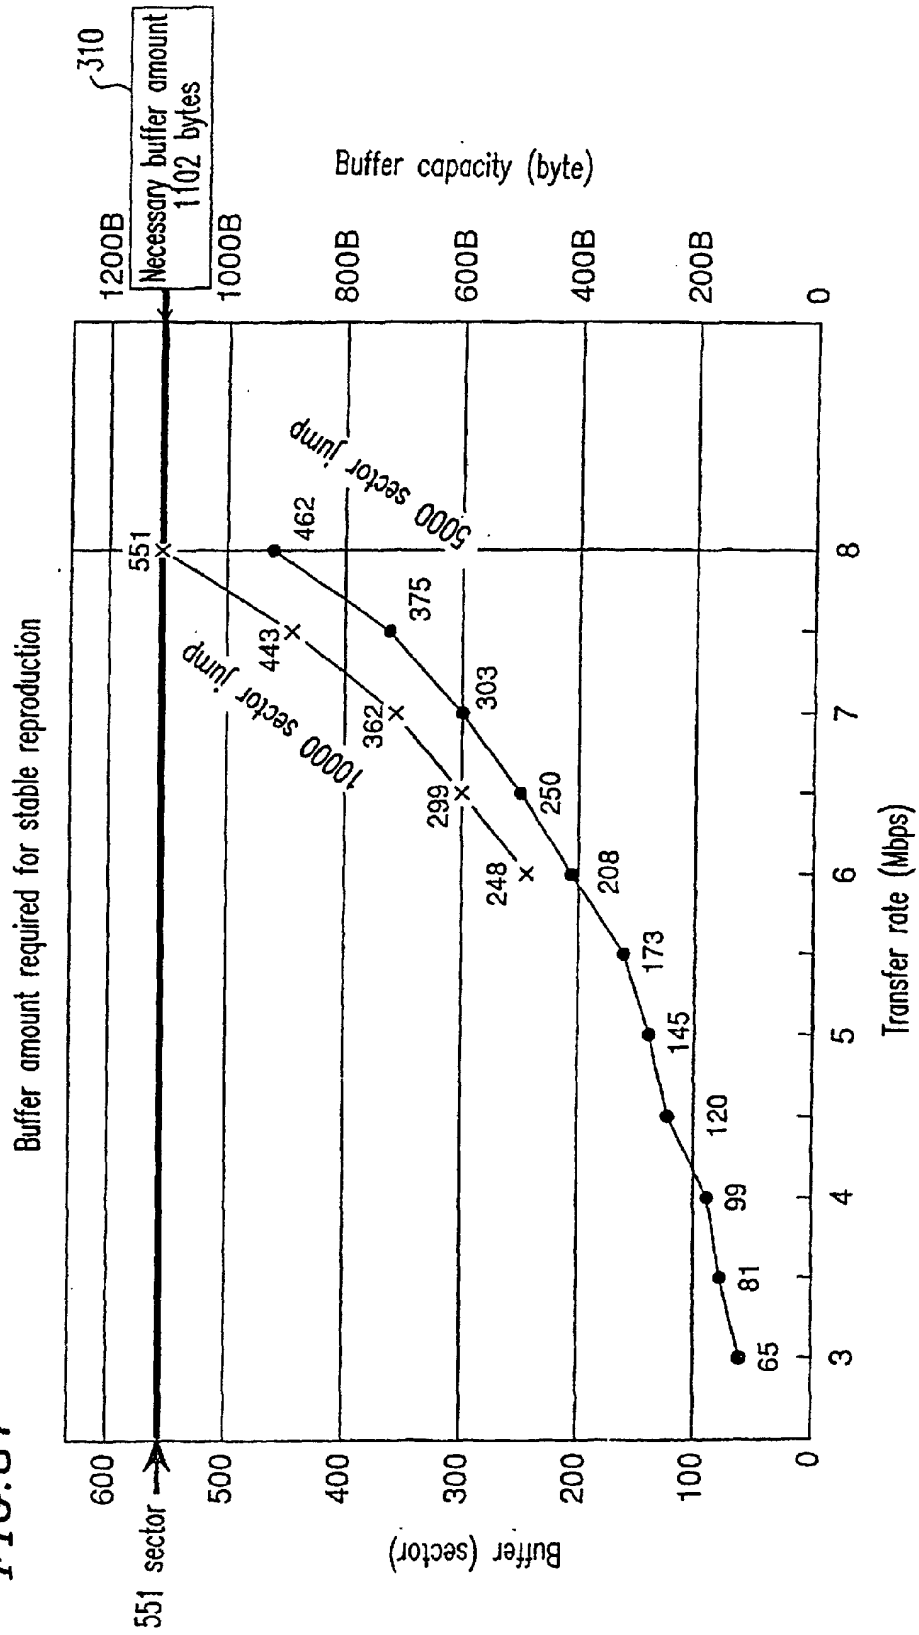


FIG. 88 VSTT\_VOBS

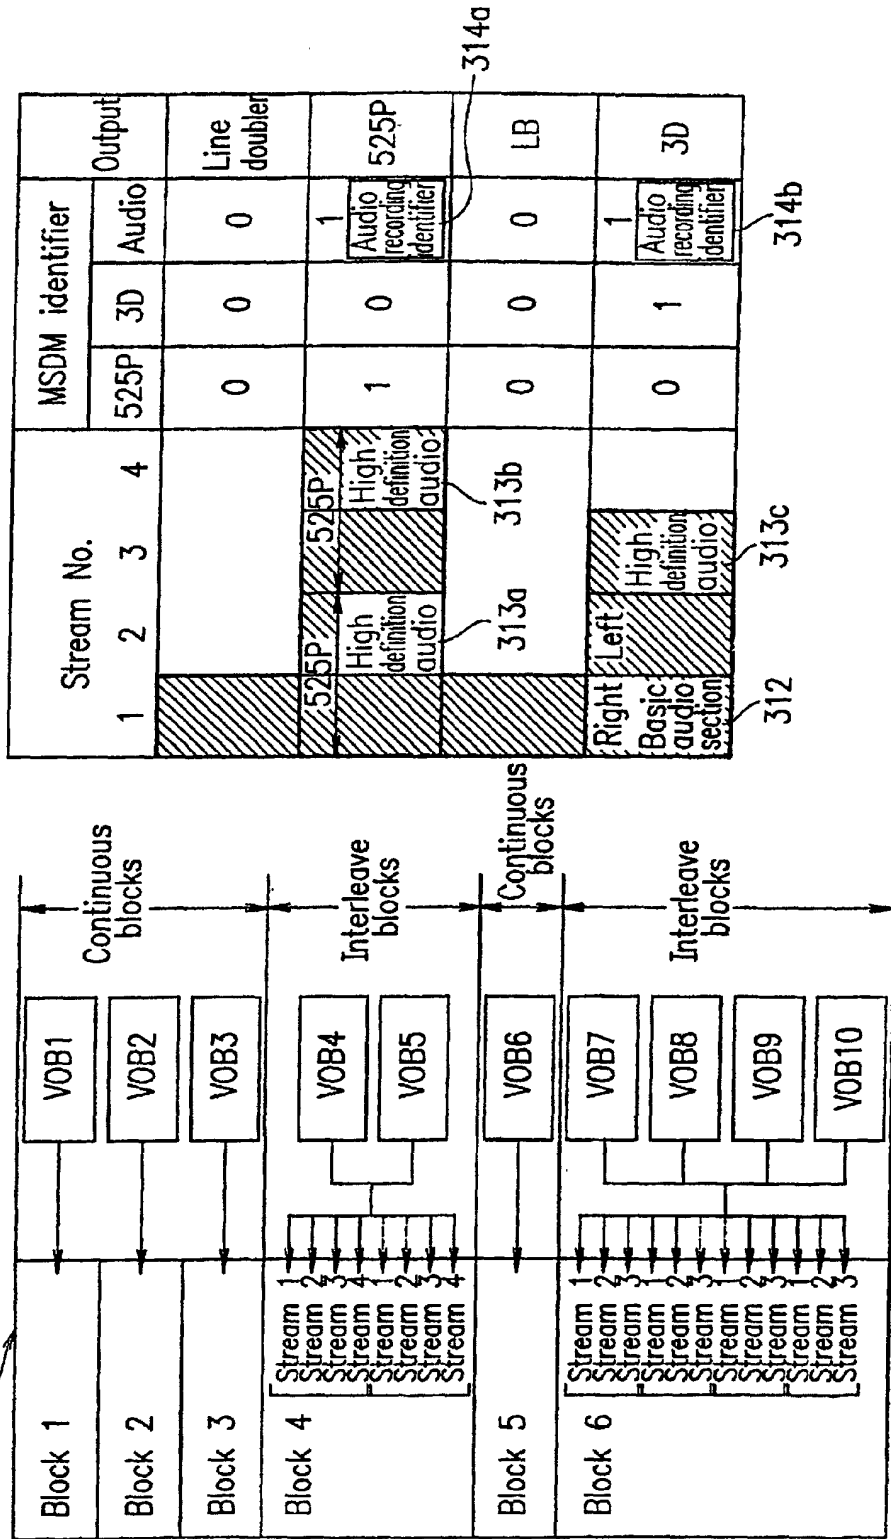


FIG. 89


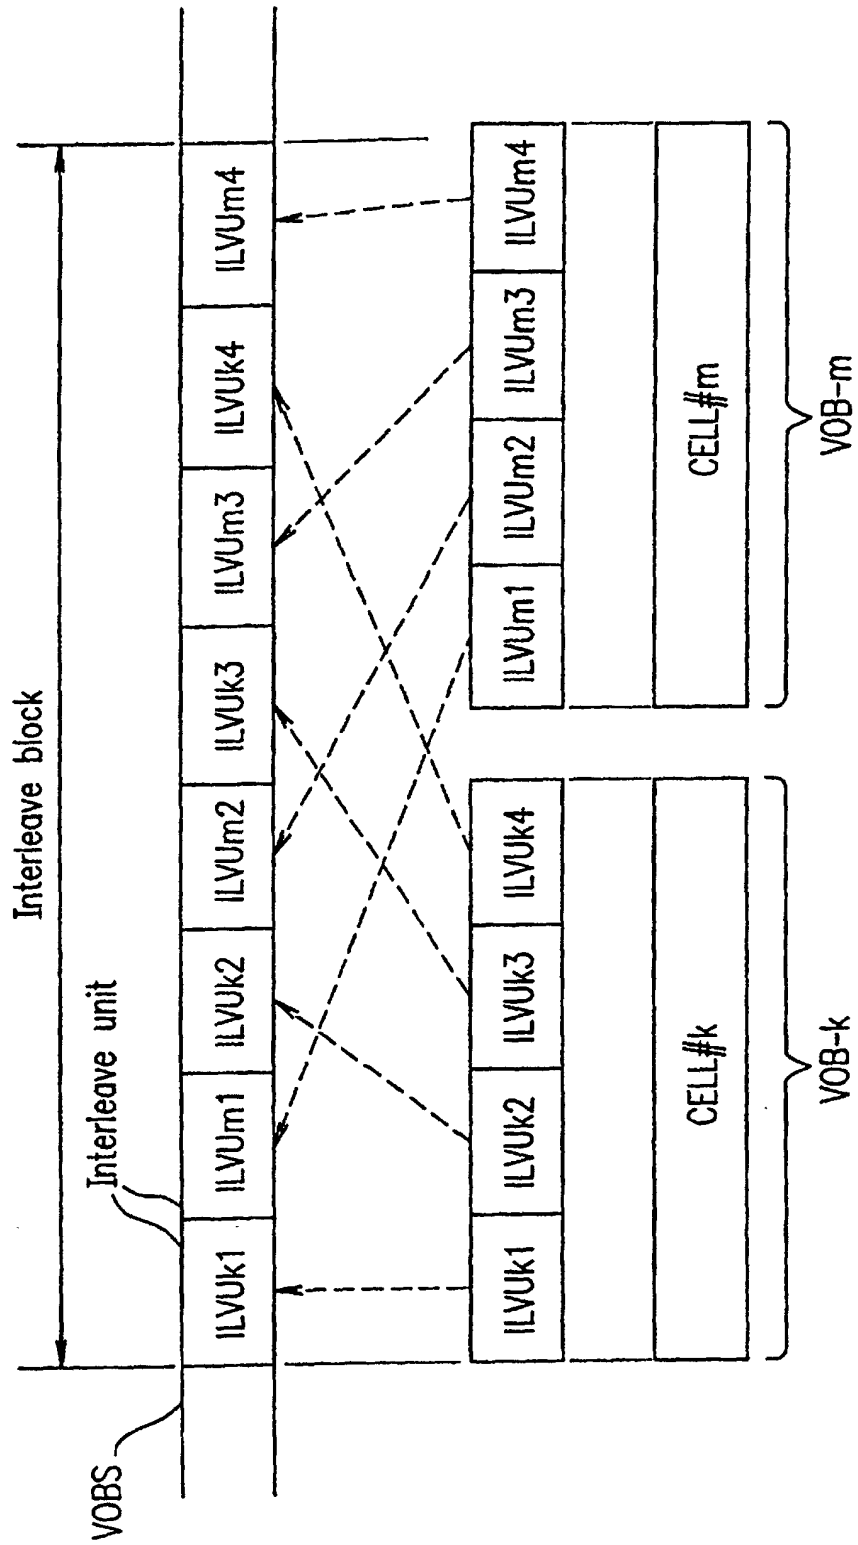



FIG. 90

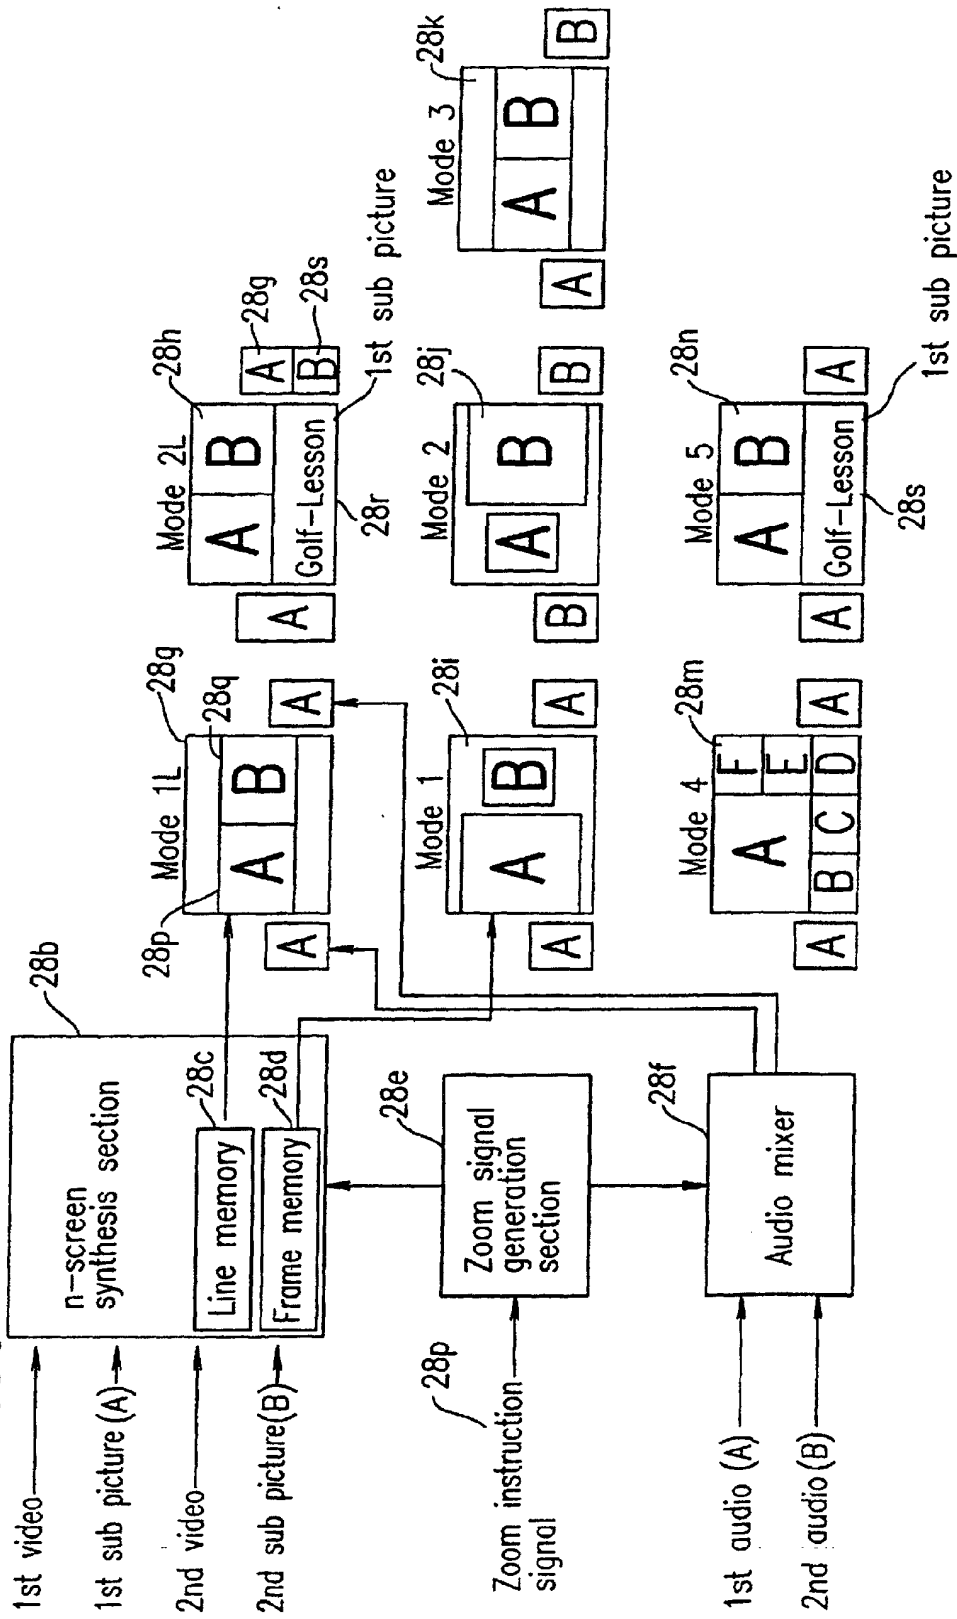



**FIG. 91**

## Principle of horizontally dividing and re-synthesizing high resolution signal (luminance signal)

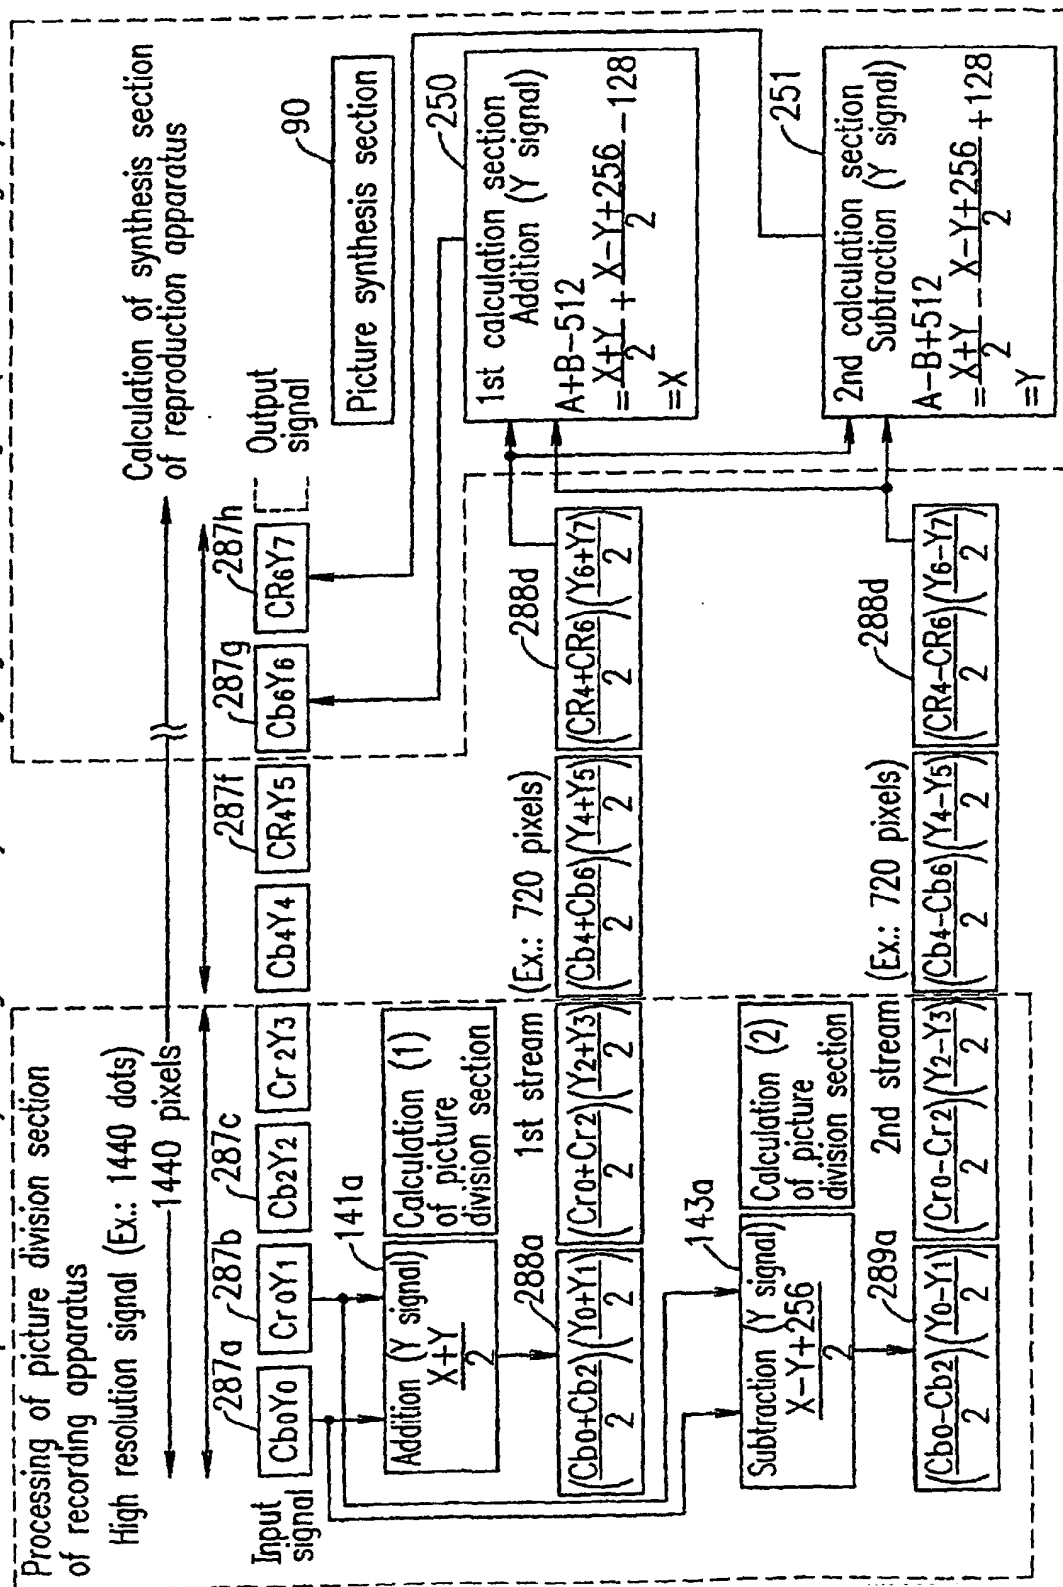



**FIG. 93**

Operation of conventional reproduction apparatus (compatibility)

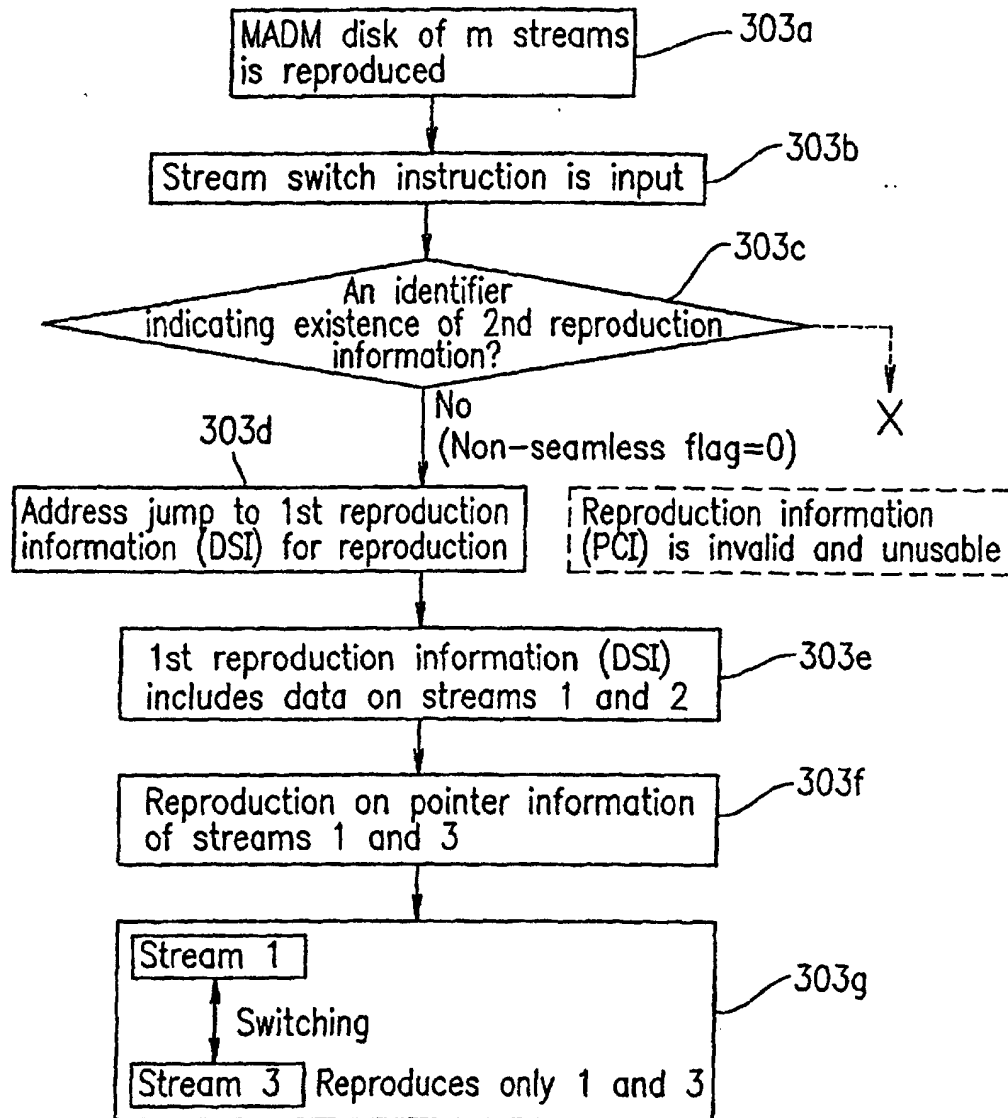


FIG. 94

## Operation of MADM reproduction apparatus


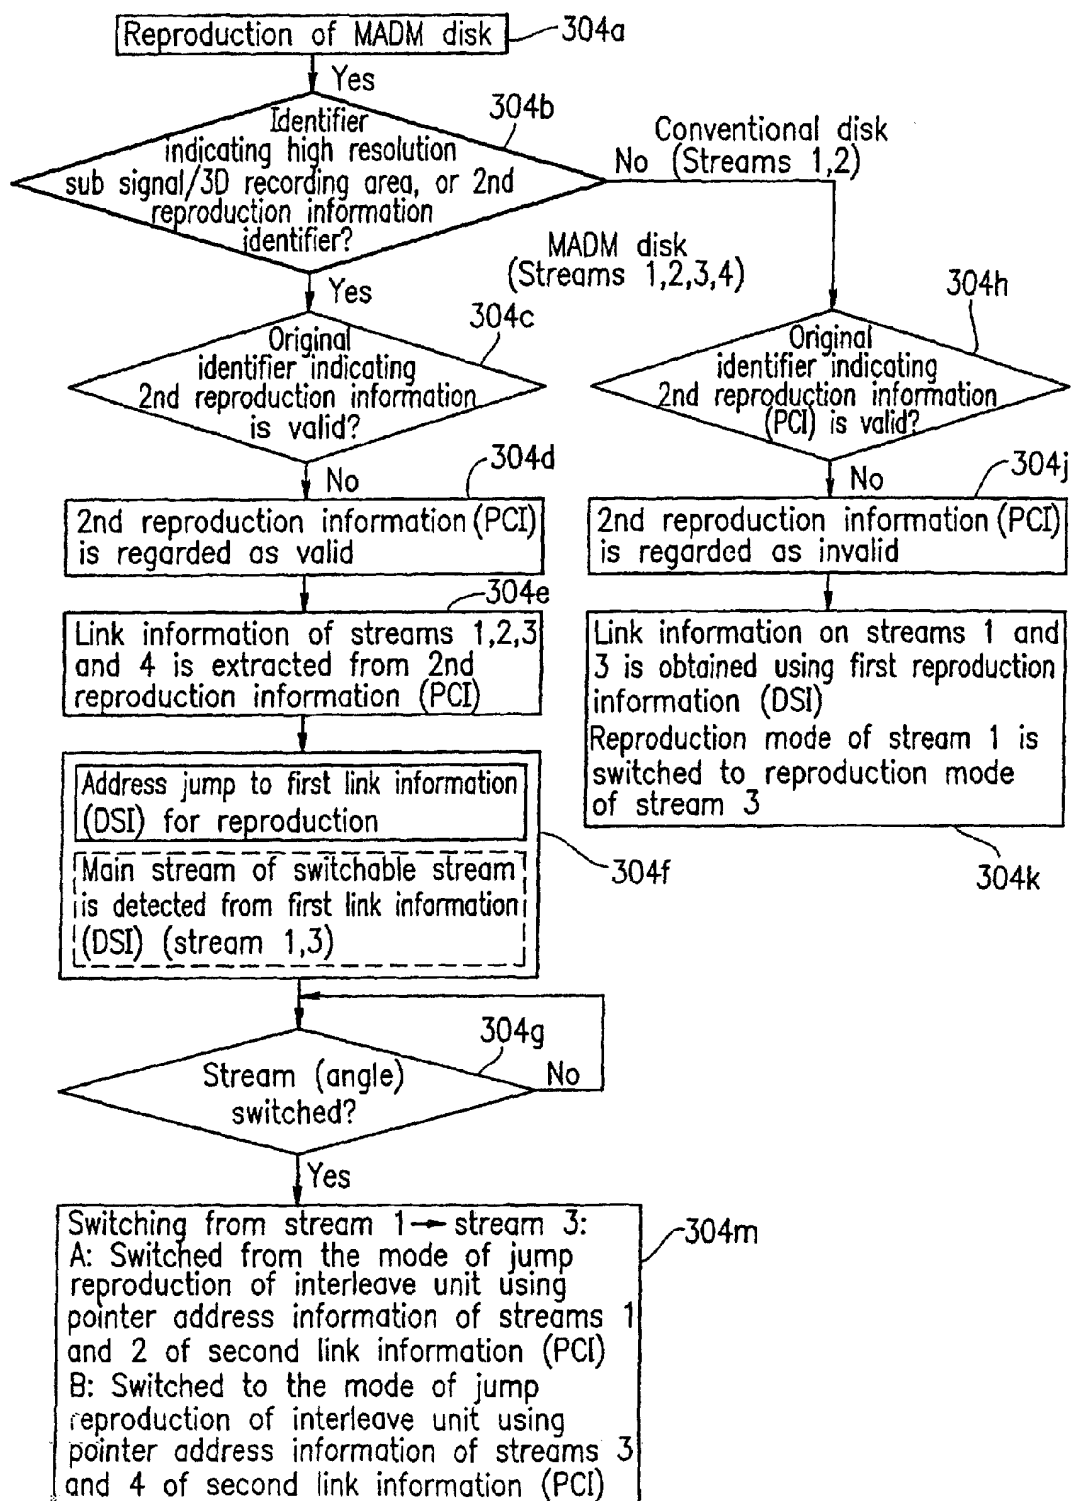


FIG. 95

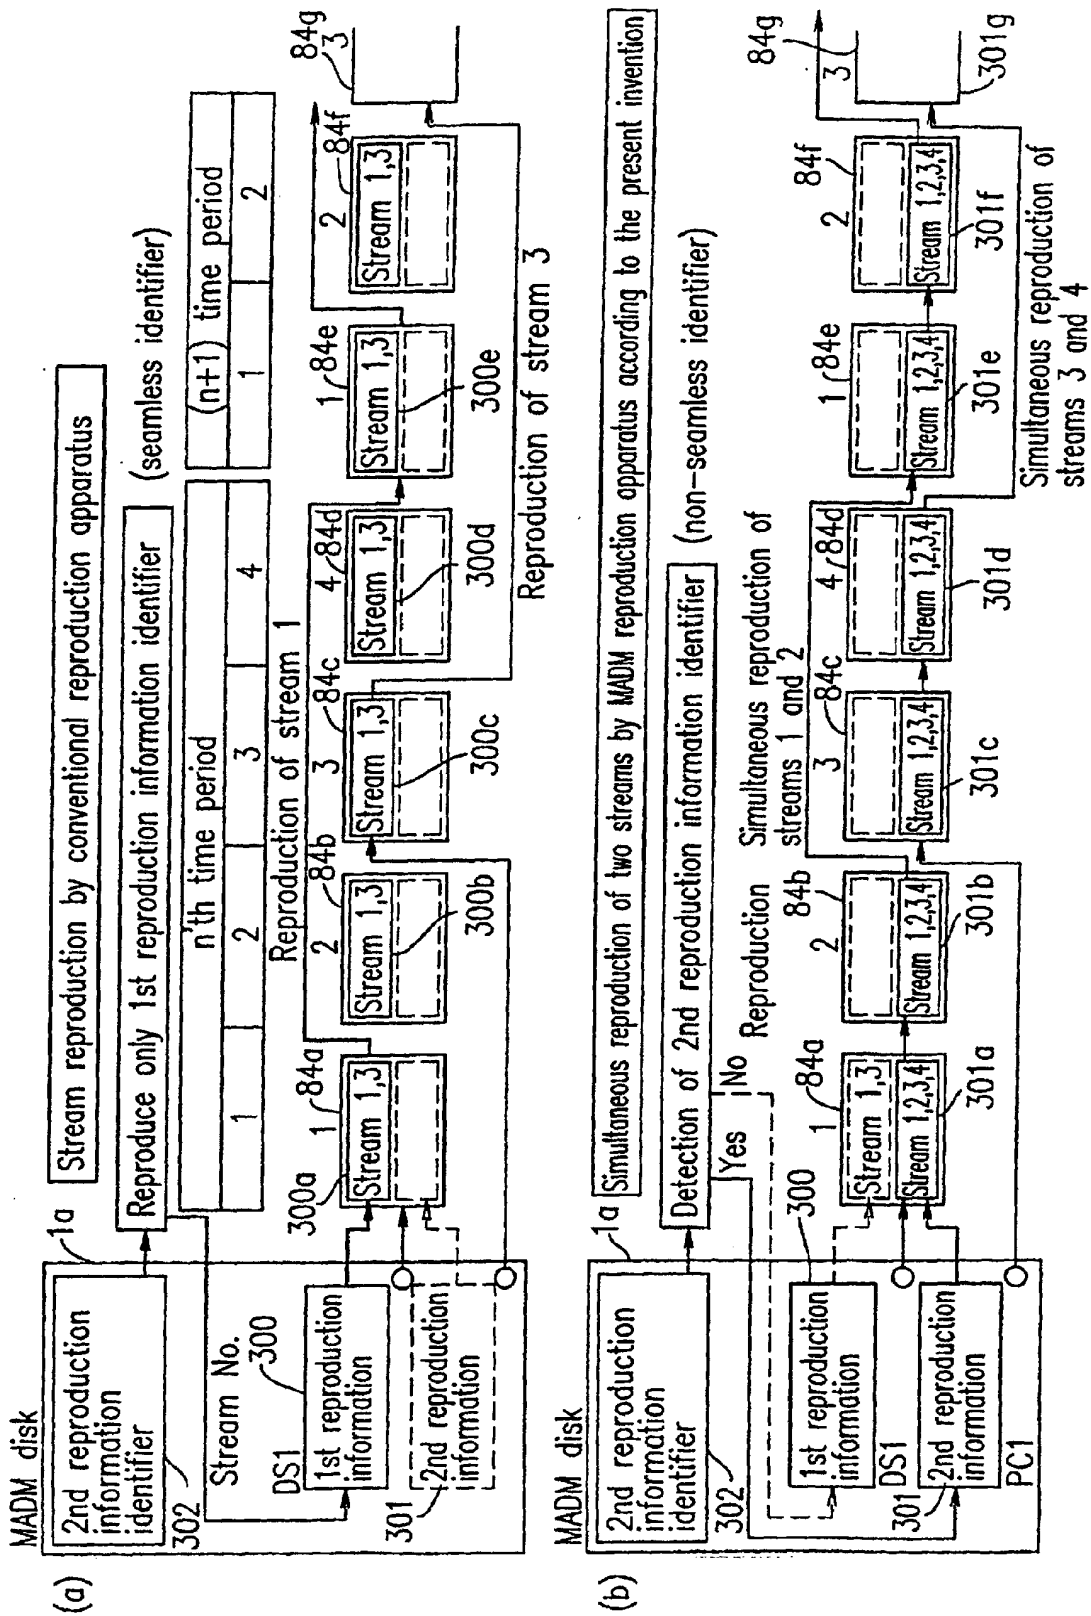

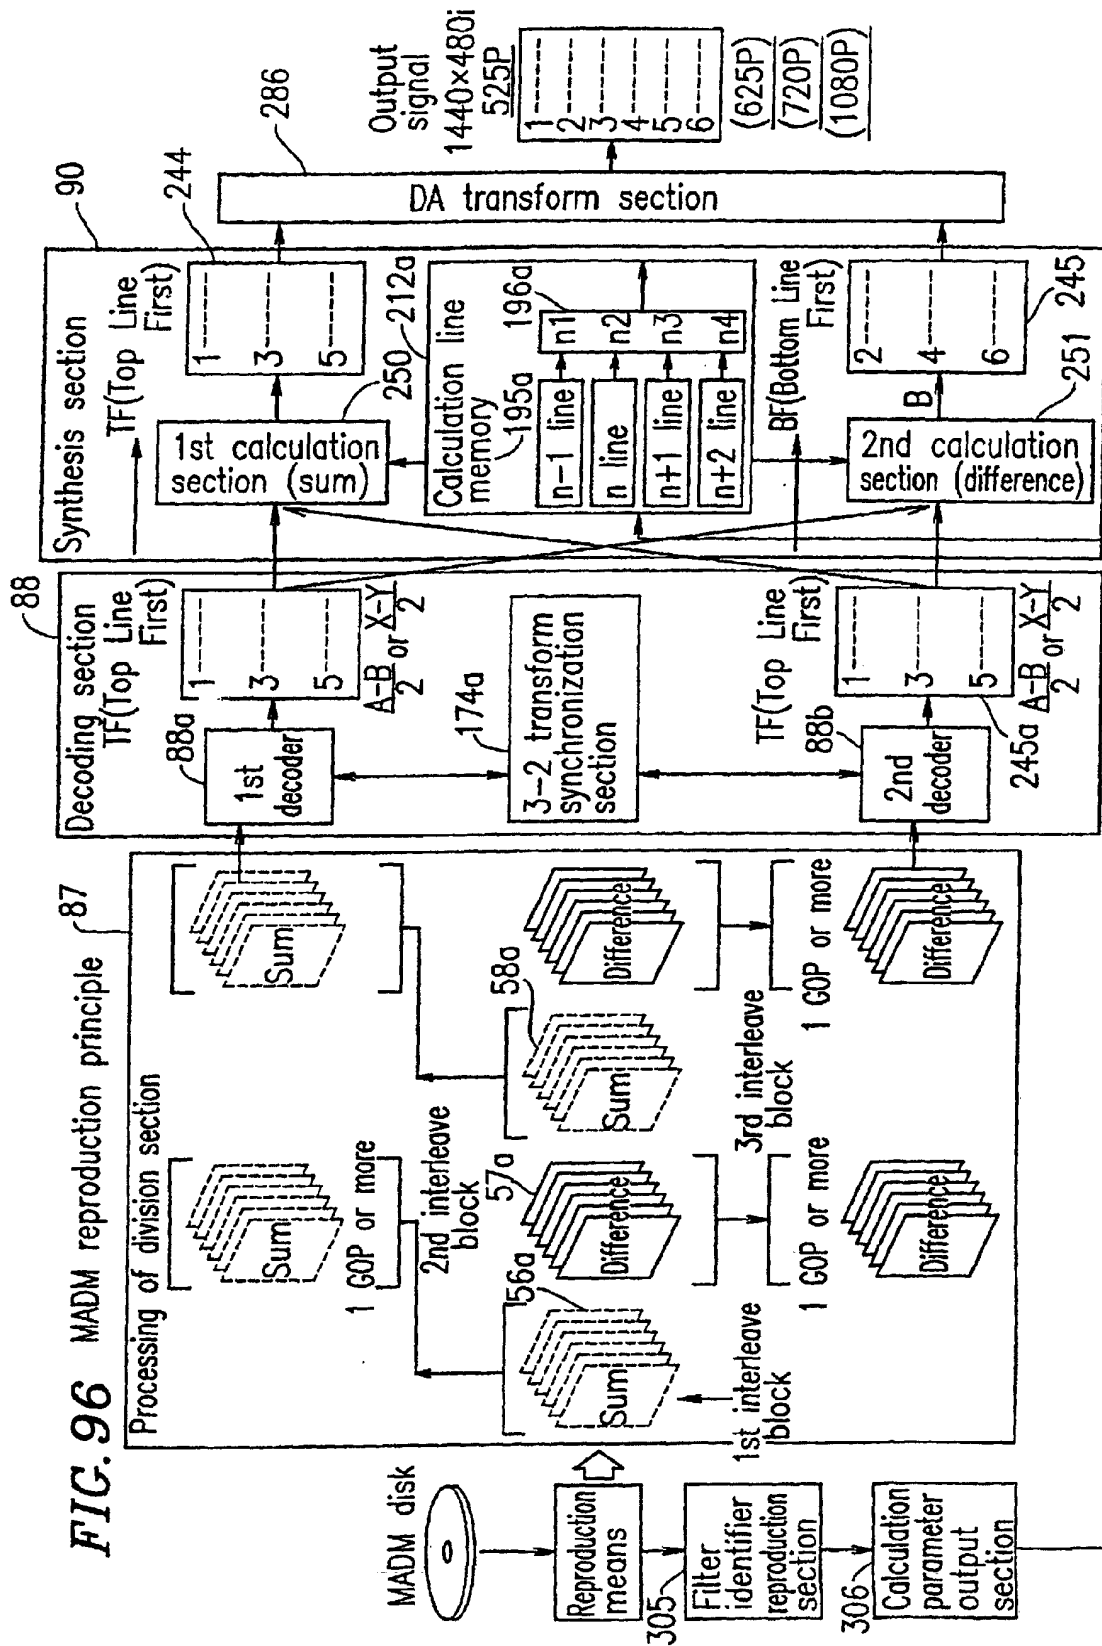


FIG. 97 MADM reproduction principle

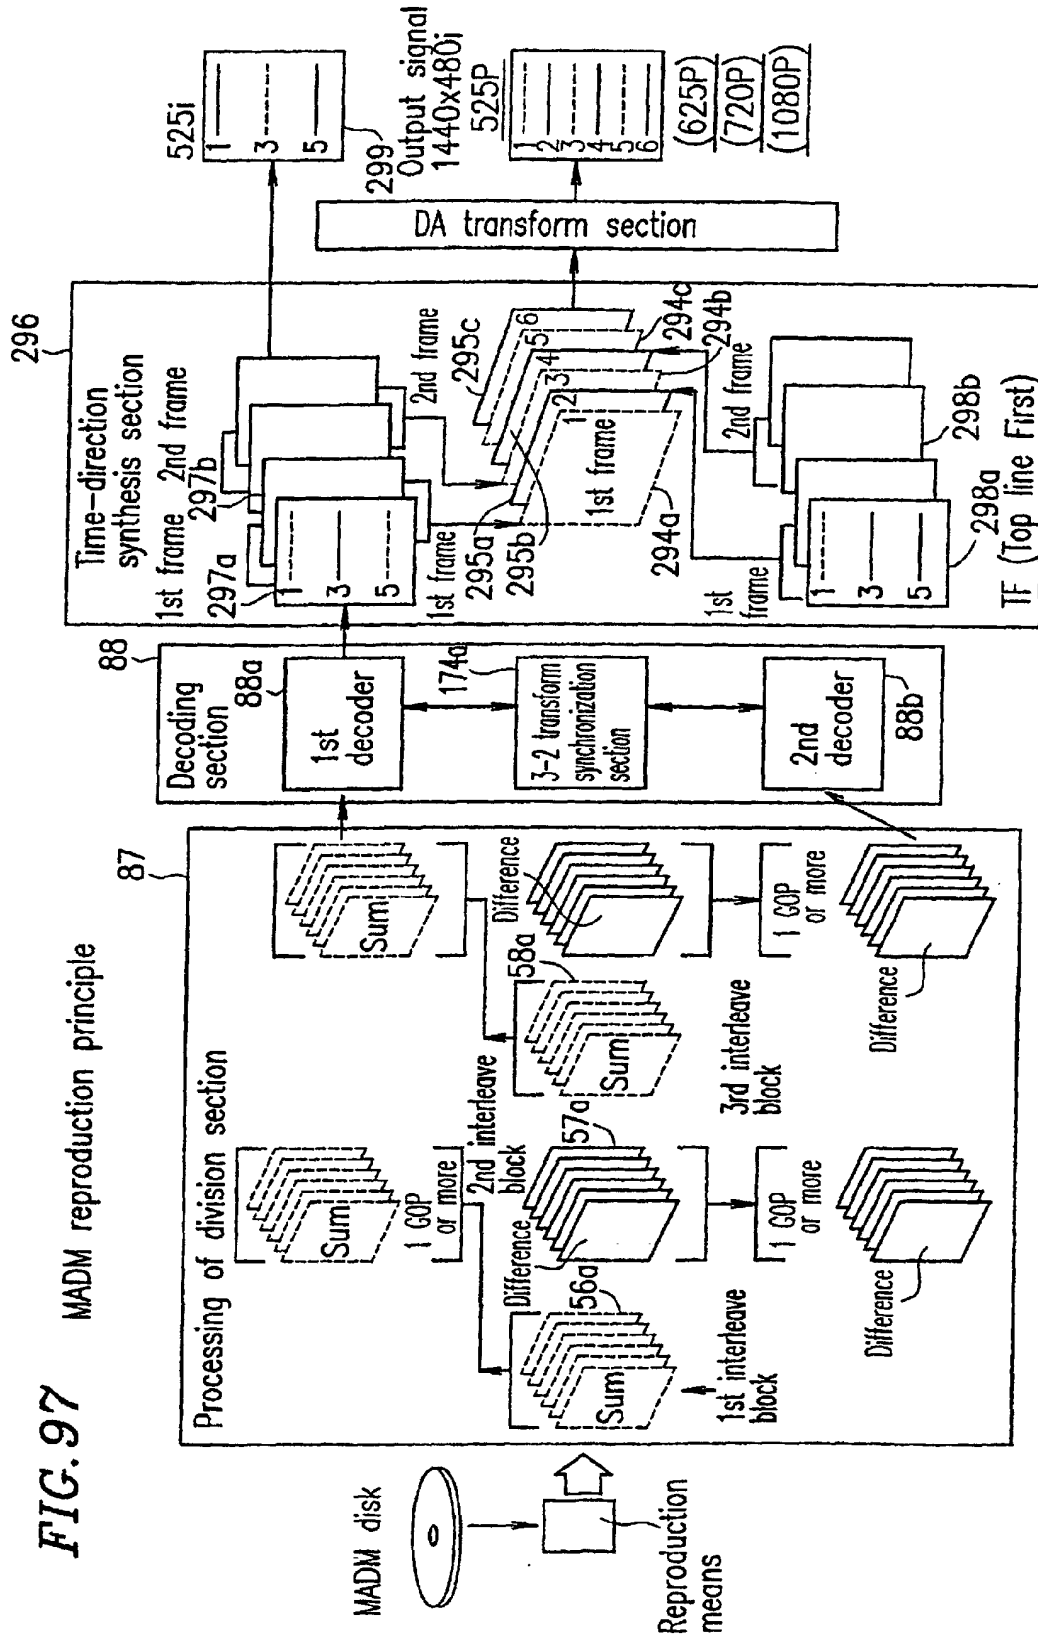


FIG. 98

